

019-06-06-051

Western Decarita Petroleum Limited

Report on a Seismic Survey

of the

Norman Wells Area

NWT Permit 3785

D.I.A.N.D. Project #19-6-6-73-2

Seismic Sections Lines:

1, 2, 3, & 4.

Western Decalta Petroleum Limited
Report on a Seismic Survey
of the
Norman Wells Area



N.W.T. Permit 3785

OPERATOR: Western Decalta Petroleum Limited

CONTRACTOR: Northern Geophysical Limited

D.I.A.N.D. Project #19-6-6-73-2

Field work carried out in March and April, 1973.

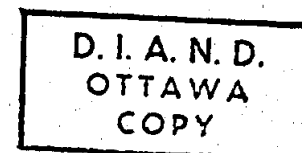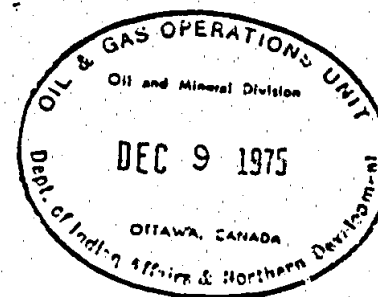

019-06-06-051

Submitted by

[Signature]


Date

Nov 20/75

TABLE OF CONTENTS

LOCATION MAP	.1
INTRODUCTION	.2
FIELD OPERATIONS.	.2
General	.2
Surveying	.3
Drilling	.3
Recording	.3
COMMUNICATIONS	4
KEY PERSONNEL	4
EQUIPMENT (Northern Geophysical Ltd.)	5
SUB-CONTRACTED EQUIPMENT AND SERVICES	.6
SEISMIC REPORT DATA	6
PERMITS AND DAMAGES	7
DATA PREPARATION AND PROCESSING	7
EXPERIMENTATION	.7
CLIMATIC CONDITIONS	7
CONCLUSIONS AND RECOMMENDATIONS	.8
APPENDIX 1 - PRODUCTION STATISTICS	.9
DIAGRAMS AND TABLES	
Spread Layout Diagram	10
Geophone Response Curve	11
DATA PROCESSING	.12
RESULTS	12

ENCLOSURES: Shot Point Map In pocket.
Seismic Sections Lines 1, 2, 3, & 4 " "

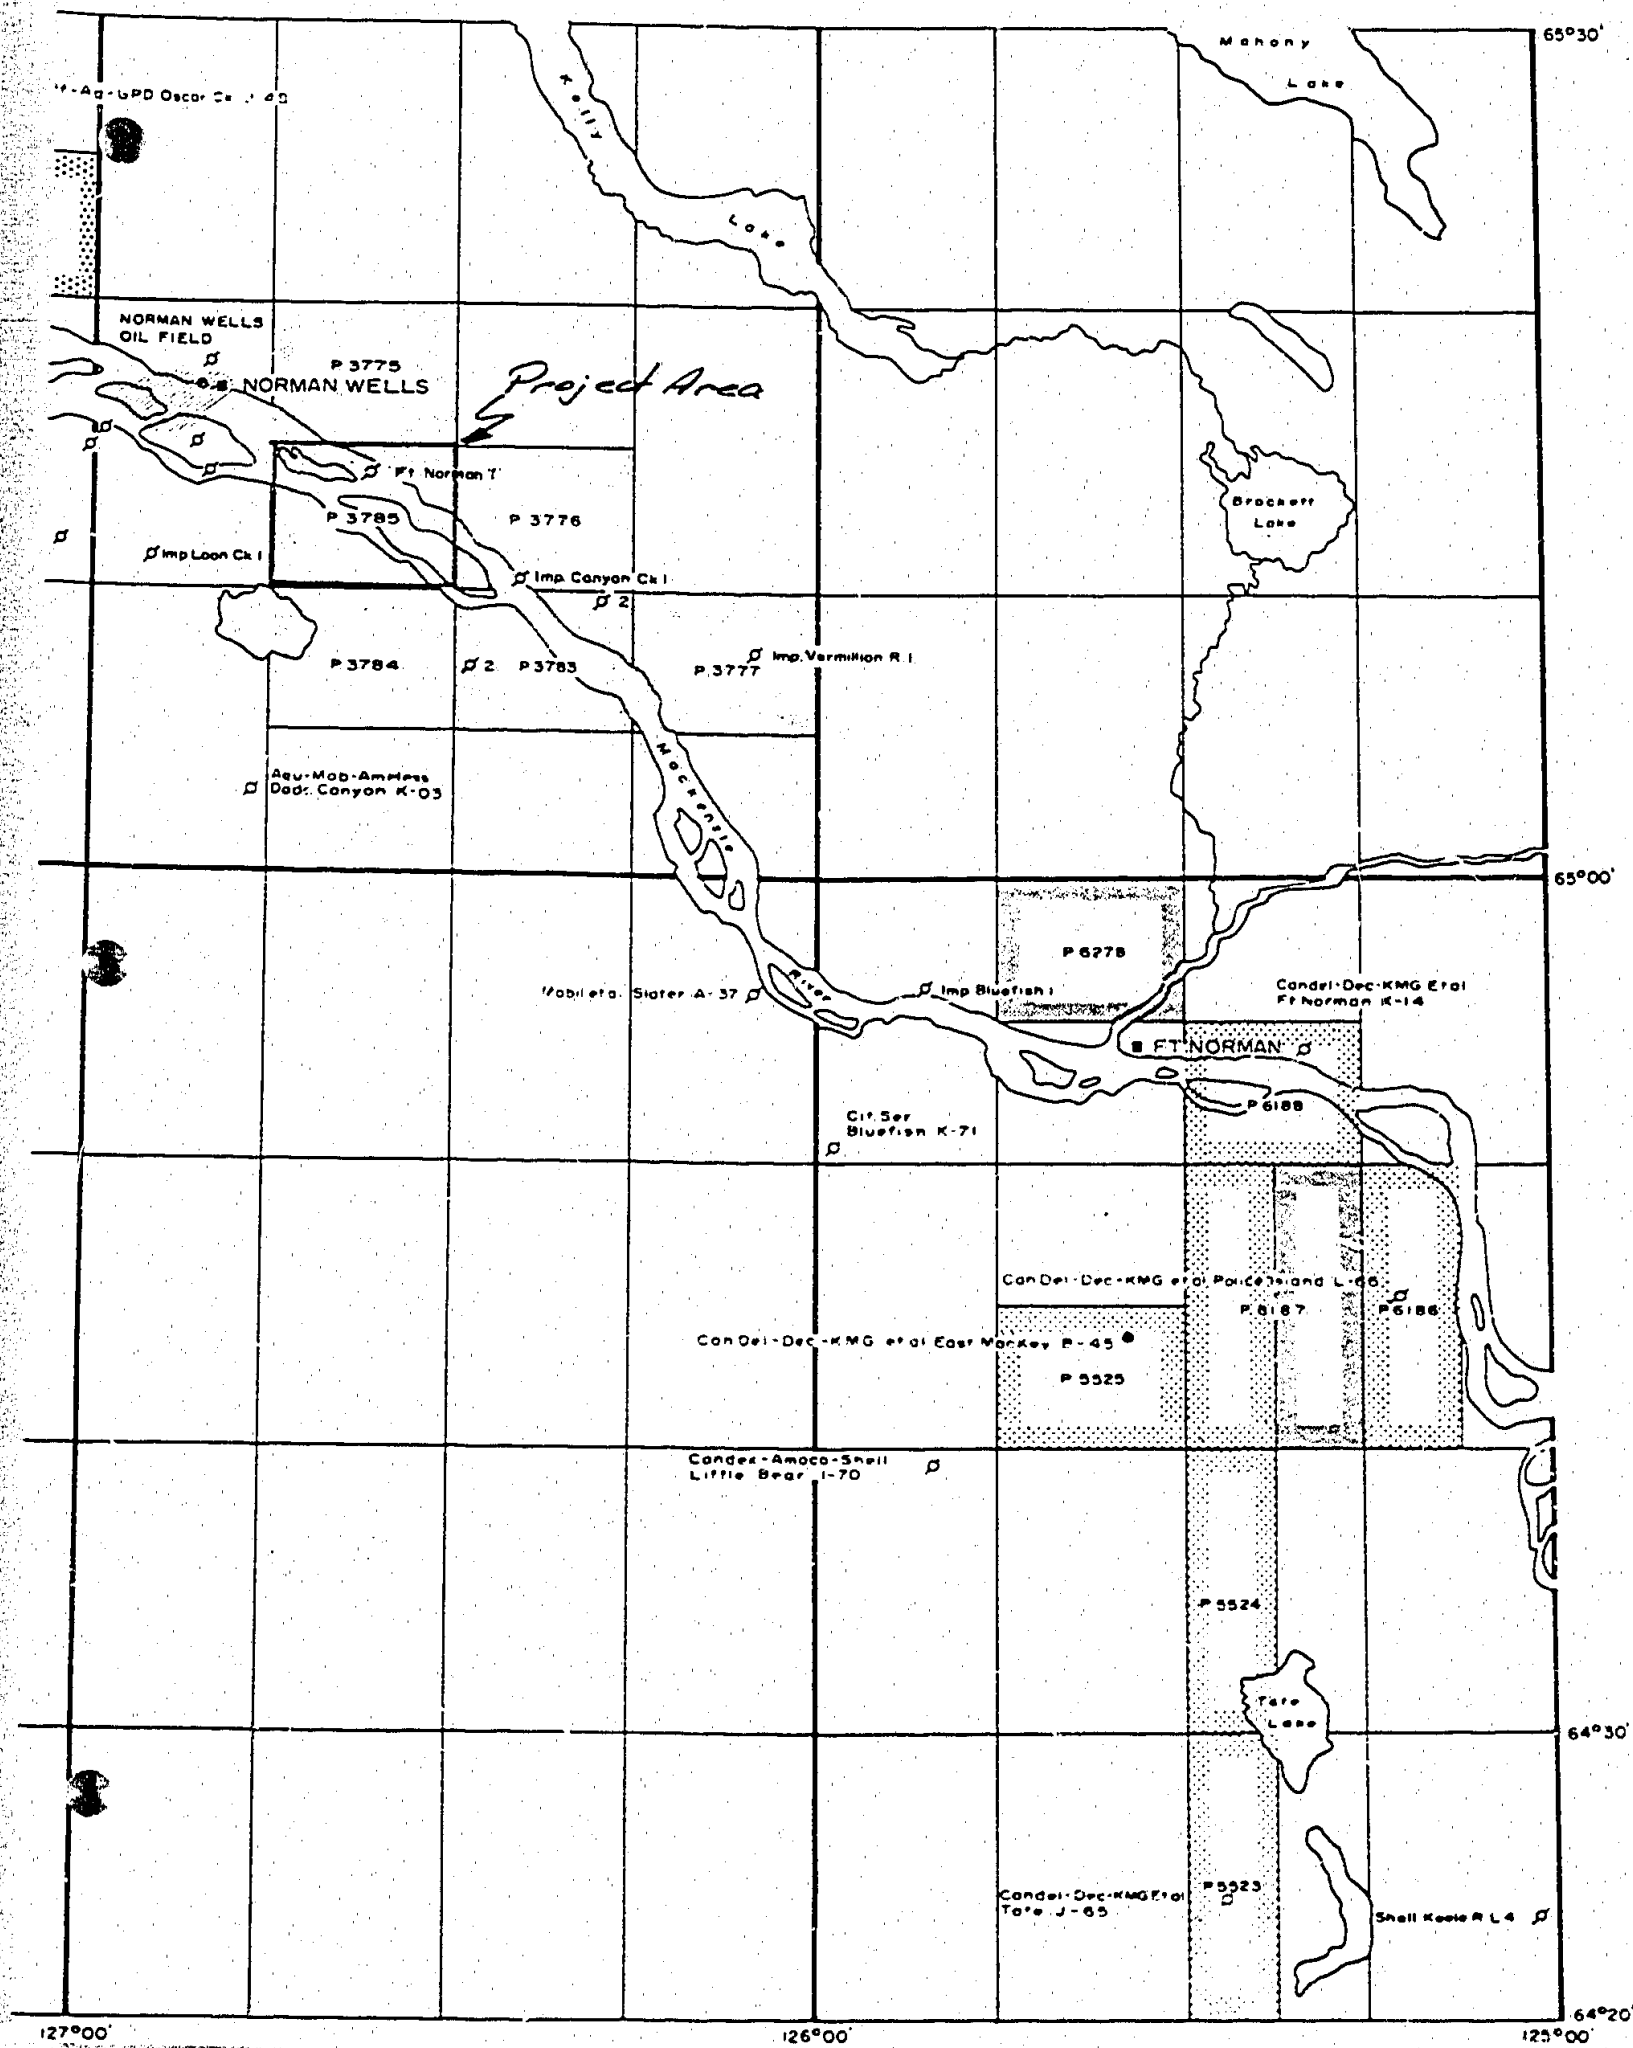

INTRODUCTION

Project Name - Norman Wells, Northwest Territories
Project Number - 73-192T
Location - Map Ref. 96-E-SE
- Latitude - $65^{\circ} 10' 00''$ to $65^{\circ} 14' 30''$ N
- Longitude - $126^{\circ} 41' 55''$ to $126^{\circ} 45' 00''$ W
Duration of Project - March 26, 1973 to April 8, 1973
Contractor - Northern Geophysical Ltd., Party N-3
Client - Western Decalta Petroleum Ltd.
Client Representative - Mr. L. Motiuk
Type of Survey - Seismic reflection (dynamite)
Purpose of Survey - To evaluate the Norman Wells Reef

FIELD OPERATIONS

General

- Description of area - flat terrain covered with small trees and muskeg - program came to the banks of the Mackenzie River which were approximately 30 feet above water level.
- Topographic features - program located between the Mackenzie River and Three Day Lake.
- Maximum elevation 385.7 feet above sea level at S.P. #6 on Line #N-4.
- Minimum elevation 194.1 feet above sea level at S.P. #3 on Line #N-2.
- Camp location - 4 miles southwest of Norman Wells, N.W.T. - access by truck across the Mackenzie River.

Surveying

Contractor	-	Felix Seismic Surveys Ltd.
Surveyor	-	B. MacBride
Instrument	-	TIAE Theodolite
Chain	-	Steel tape
Control	-	From established survey (1972) Line #1-G
Vertical Ties	-	Within + or - 3 feet
Horizontal Ties	-	Within + or - 100 feet
Bearings	-	From established survey (1972) Line #1-G

Drilling

- General - muskeg, clay, silt, sand, gravel and ice stringers
- Drills - (1) Failing 1000, (1) Carey Top Drive and (1) Mayhew 500
- Drill production - fair to good

Recording

Equipment & Instrumentation:

- FT-800 24 Trace Digital Binary Gain Amplifiers
- PDR-89 tape transport, 9 track, SEG (A) format
- Remote firing system - Mandrel SPC-OPC with Motrac radios
- 20 - 6 takeout cables - 220' station intervals
- 125 strings Mark L-2 (14 Hz.) geophones - 9/grp. - 25' spacing

Parameters:

- | | |
|--------------------|---------------------|
| - Type of spread | 0 - 24 12/12 24 - 0 |
| - Coverage - CDP | 300% |
| - Station interval | 110 feet |
| - Tail spreads | 0 |

- Geophone array	9/110'
- Record quality	Fair to good
- Shot point spacing	440 feet
- Shot point patterns	single holes on flag
- Hole depth	60 feet
- Charge size	10 lbs.
- Number of groups dropped	3
- Record filter	LC 16-124
- Sample rate	2 Ms.

COMMUNICATIONS

Citizen band Motracs employed for inter-crew communications.

KEY PERSONNEL

Supervisor	- I. P. Bishko
Party Manager	- J. A. Miller
Observer	- R. Ireland
Shooter	- J. Hulowski
Surveyor	- B. MacBride

EQUIPMENT (Northern Geophysical Ltd. - Camp, Drills & Recording)

<u>Unit #</u>	<u>Use</u>	<u>Description</u>
240	Kitchen	Nodwell Carrier
239	Utility/Sleeper	Nodwell Carrier
127	Sleeper	Nodwell Bros. - Sleigh
11	Fold-out Sleeper	Sleigh
111	Shop	Sleigh
181	Party Manager	Ford 4 x 4 3/4 ton
201	Mechanic	Ford 4 x 4 3/4 ton
213	Drill	Mayhew 1000
128	Carrier	Nodwell FN110
212	Drill	Carey Top Drive
172	Carrier	Nodwell FN110
203	Recorder	S.I.E. Instruments - PT-800 & PDR-8
1	Carrier	Nodwell FN110
189	Shooter	Bombardier
174	Reel	Nodwell FN110
190	Survey	Bombardier
144	Fuel	Sleigh - 3 x 500 gallon tanks
	Fuel	Sleigh - 3 x 500 gallon tanks
191	Reel	Bombardier
5	Water	Nodwell
	Parts	Sleigh
241	Utility/Sleeper	Atco Sleigh - office Norman Wells

<u>Unit #</u>	<u>Use</u>	<u>Description</u>
242	Shop	Sleigh mounted
220	Kitchen	Sleigh - Corab
148	Sleeper	Sleigh - Portabuilt
	Fuel	Sleigh - 2000 gallon capacity

SUB-CONTRACTED EQUIPMENT AND SERVICES

Surveying

- Felix Seismic Surveys Ltd.
- (1) Surveyor and (1) Rodman
- (1) PassePartout

Drilling

- Garrity & Baker
- (1) Mayhew 500 mounted on Nodwell FN-110

Bulldozing

- Bruce Rome Construction
- (2) D6C's

Slashing

- Fred Clement - Fort Norman

SEISMIC REPORT DATA

Western Decalta Landuse Permit Number - N73B430

PERMITS AND DAMAGES

No settled lands exist in this area, therefore permitting was not required.

DATA PREPARATION AND PROCESSING

- Northern Geophysical Ltd., posted relevant data information on the field records and tapes and supplied final operations map.
- Felix Seismic Surveys Ltd., supplied the shotpoint locations, computations and prepared the final location map.
- Seismic data was transmitted to Western Decalta Petroleum Ltd. for data preparation, processing and interpretation.

EXPERIMENTATION

Shooting and recording parameters were specified by the client based on previous experience in this area and no experimentation was undertaken.

CLIMATIC CONDITIONS

The program was conducted late in the winter season with spring thaw conditions prevailing, but conditions did not seriously hamper operations.

CONCLUSIONS AND RECOMMENDATIONS

We consider that near optimum selection of equipment and choice of field parameters was employed on this assignment, and for a similiar program in this area, would recommend little if any change.

Respectfully submitted by:

NORTHERN GEOPHYSICAL LTD.

Ivan P. Bishko

I. P. Bishko
Supervisor

July 17, 1974

APPENDIX I - PRODUCTION STATISTICS

1. Total Number Miles Shot	10.33
2. Total Number Profiles Shot	128
3. Total Dynamite Used	1550 lbs.
4. Dynamite Used Per Profile	12.11 lbs.
5. Total Number Caps Used	166
6. Caps Used Per Profile	1.3
7. Total Number Holes Drilled	131
8. Total Footage Drilled	7870 feet
9. Extra Water Truck Hours	0
10. Bulldozer Hours	214.0

Cats

Commencement Date	March 26, 1973
Completion Date	April 8, 1973

Drills

Commencement Date	April 2, 1973
Completion Date	April 6, 1973

Recorder

Commencement Date	April 5, 1973
Completion Date	April 8, 1973


SPREAD DIAGRAM

MINIMUM OFFSET : 220'


S.P. INTERVAL : 440'

SPREAD DISTANCE : 1430'

GROUP INTERVAL : 110'

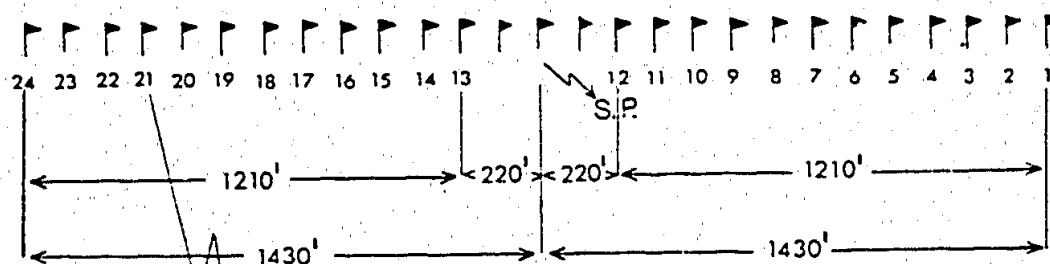


TYPICAL ARRAY

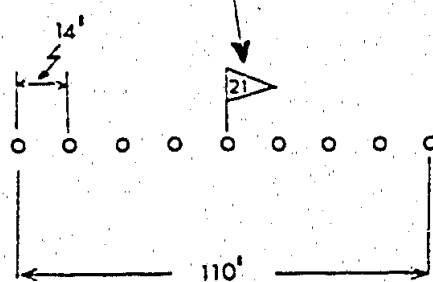

HOLE PATTERN

SINGLE HOLE.

THE ARRAY IS CENTERED AT
THE STATION FLAG.

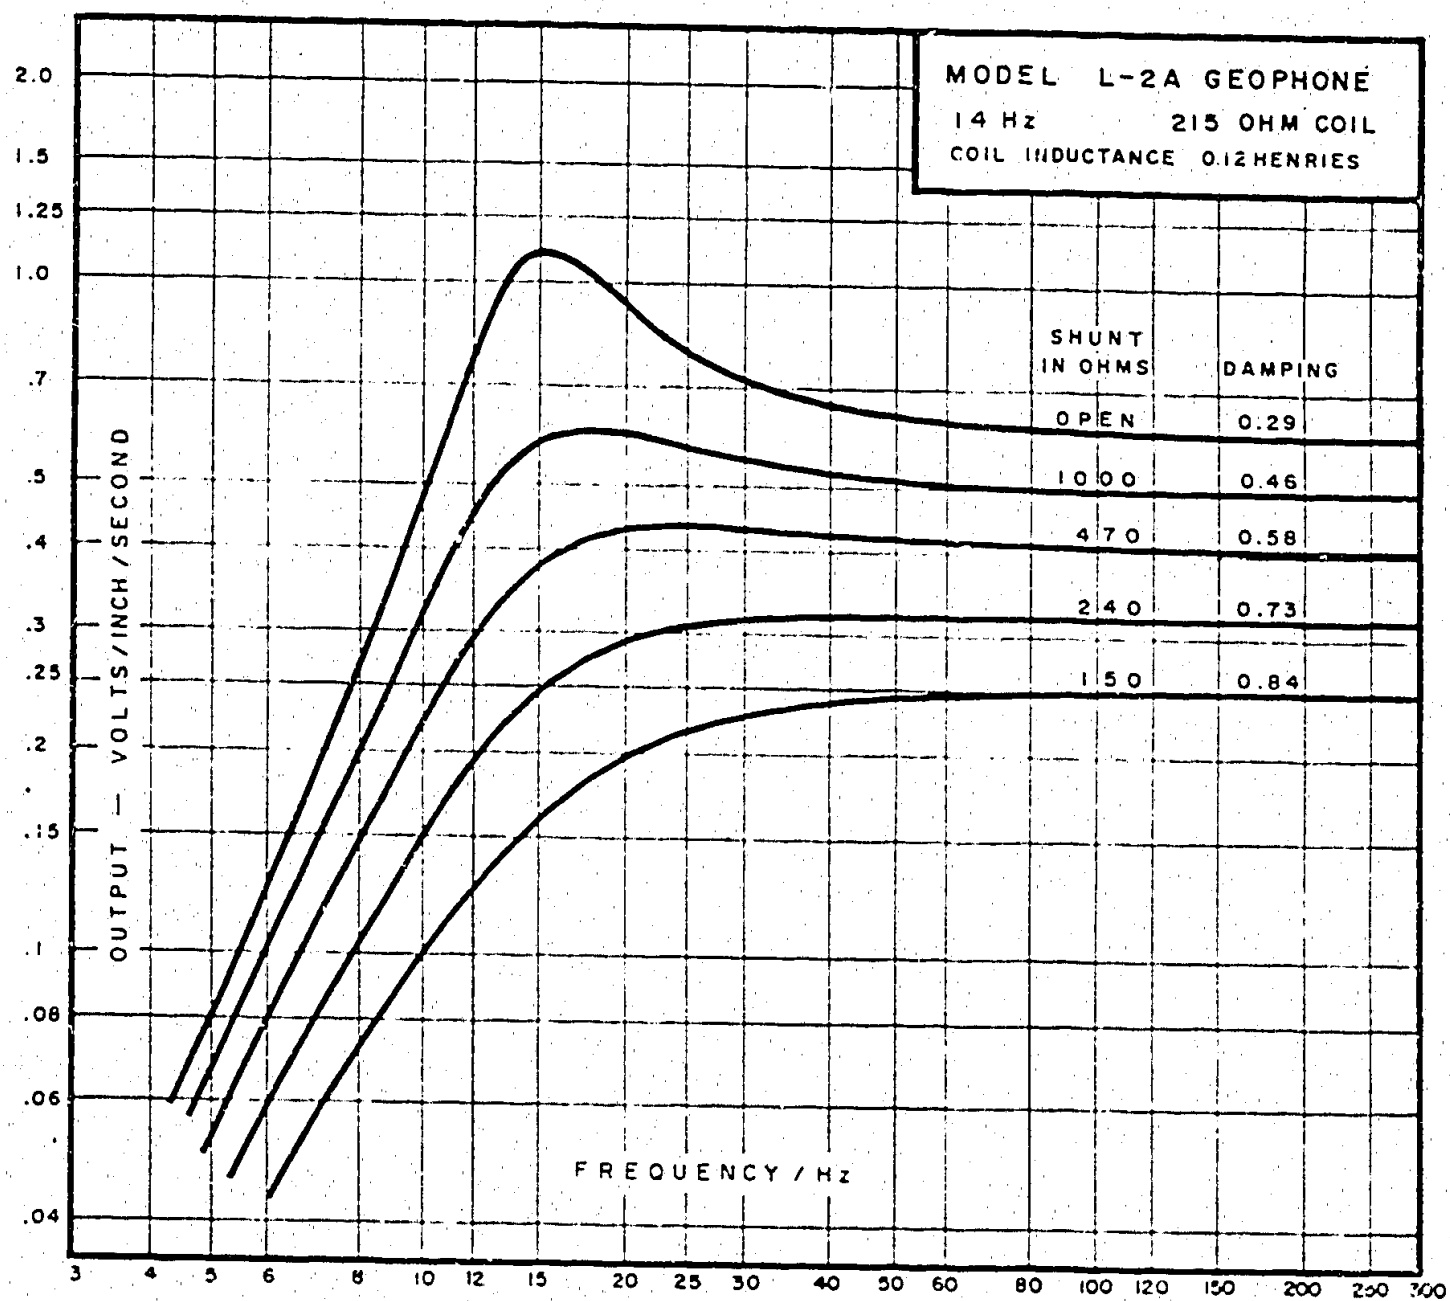

DATA PROCESSING:

Percent coverage	300
Filter	17/58
Window	0 - 2000 ms.
Flattened (Hume)	0.65 sec.

RESULTS:

In order to more clearly define possible Kee Scarp reefs all sections were played back with the Hume reflection flattened (at 0.65 seconds). As a result no time structure maps were made. No evidence of Kee Scarp reefs was found.