


PROJ. NO. 38-6-4-18

LINE NO. 60-04

60-04

PART NO. 1 OF 2

R.R. 8X

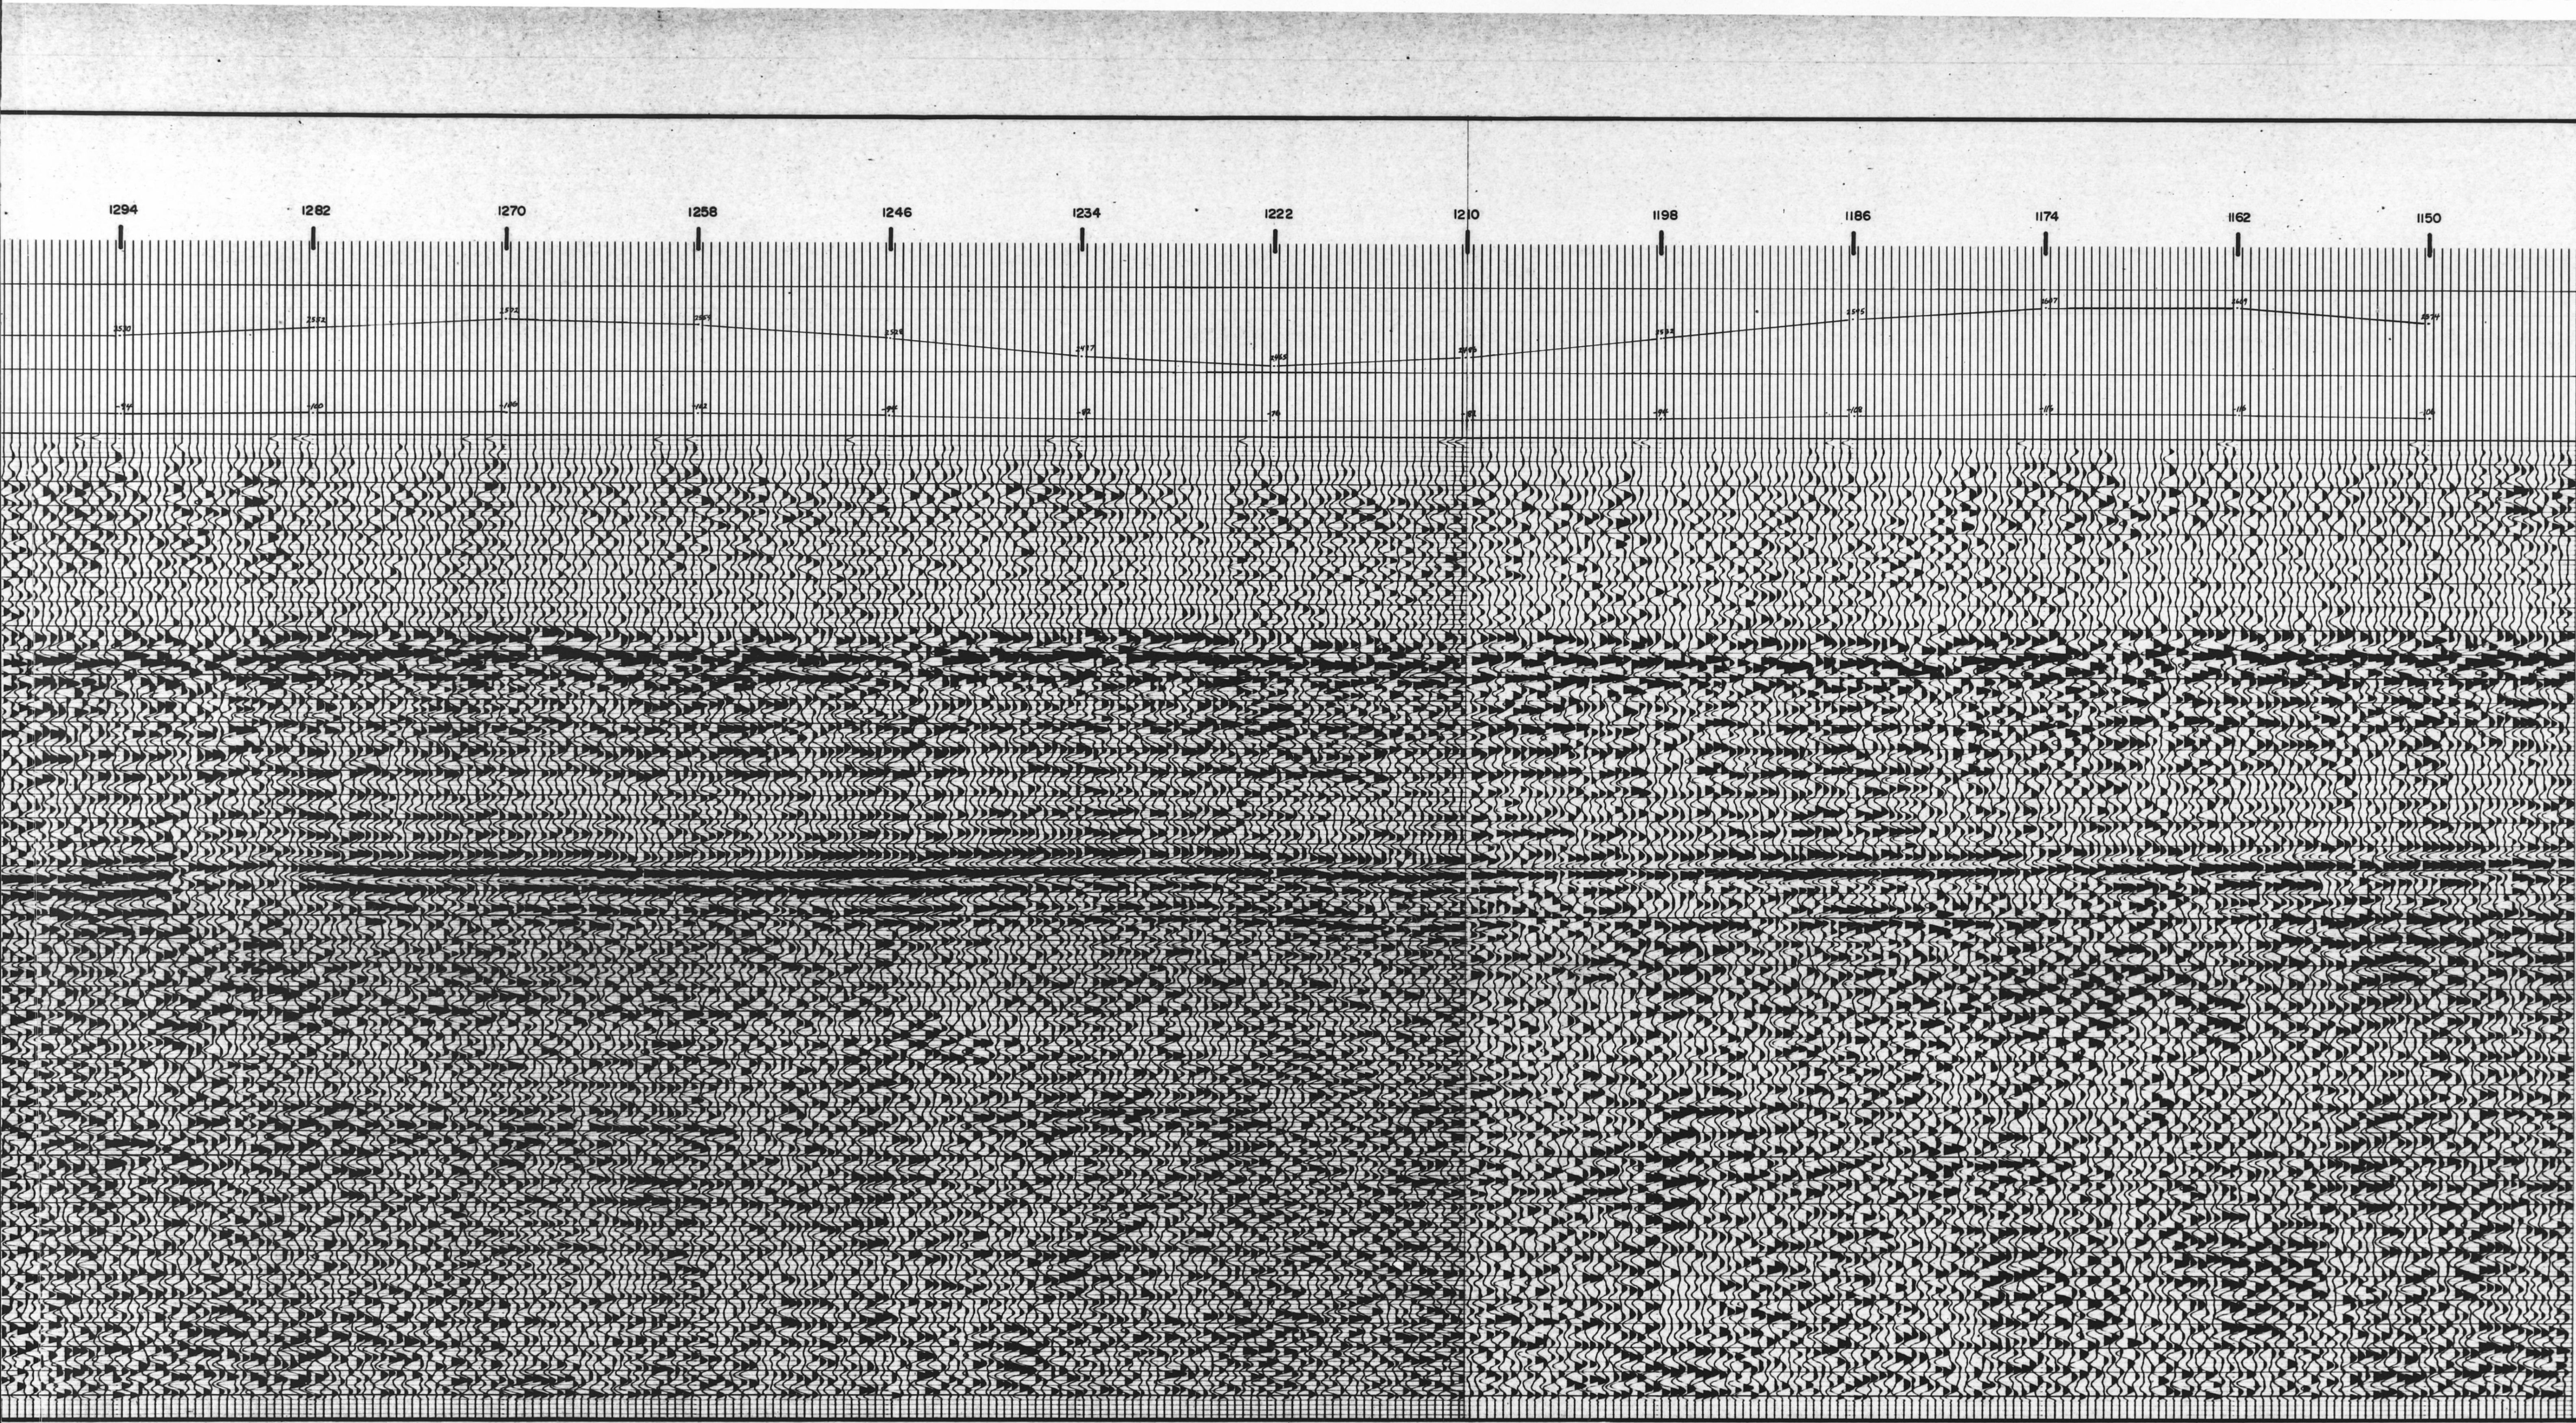

D.G. WERHAN
Computer Consultants Ltd.

LINE: 60-04
DIRECTION: EAST
PROJECT: CAMERON RIVER 'B'
PROCESSED FOR: H.B.O.G.
SHOT FOR: H.B.O.G.
SHOT BY: NATIONAL GEOPHYSICAL
SHOOTING DATE: 1966 PROCESSING DATE: AUG. 1973
PROCESSING MONITORED BY: C.L. HART & ASSOCIATES

FIELD PARAMETERS
SPREAD: 2420-770-770-2420
GEOPHONES PER GROUP: 20
GROUP INTERVAL: 220' AT 12 FOOT INTERVALS
OFFSET INTERVAL: 770' FIELD FILTER: OUT 60
SOURCE INTERVAL: 440' GAIN MODE: GEOPHONE TYPE: HSL-2
SOURCE PATTERN: 440' AMPLIFIER TYPE: AM II

☐ 1 ADC
☐ 2 DDC
☐ 3 VIBROSEIS CORRELATION
☐ 4 NMO
☐ 5 STATICS
☐ 6 TRACE EQUALIZATION
☐ 7 AMPLITUDE RECOVERY
☐ 8 DIGITAL FILTER
☐ 9 DECONVOLUTION
☐ 10 FB MUTE
☐ 11 TRACE GATHER
☐ 12 STACK
☐ 13 DAC
☐ 14 SPECIAL

REFERENCE: (3) STRUCTURE DATUM: 2200
WAVE VELOCITY: 2000 ft/sec
SUB. WAVE VELOCITY: 1000 ft/sec
REPLACEMENT VELOCITY: 1000 ft/sec
FLATTENED TO: (9) TRIM STATICS

GATE: 15-20 / 50-55
START TIME: 1.0
STOP TIME: 1.5
PREDICTION LAG TIME: 1.0

ANALOG FILTER: 15-20 / 50-55
GAIN: 10

CAMERON B
63



2060 Valley Rd. Orem, UT
Tel: (801) 221-8571
Fax: (801) 221-0453

PROJ. NO.

386-418

LINE NO.


6004

PART NO.

2 OF 2

R.R. 8X

0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24 25 26 27 28 29 30 31 32 33 34 35 36 37 38 39 40 41 42 43 44 45 46 47 48 49 50 51 52 53 54 55 56 57 58 59 60 61 62 63 64 65 66 67 68 69 70

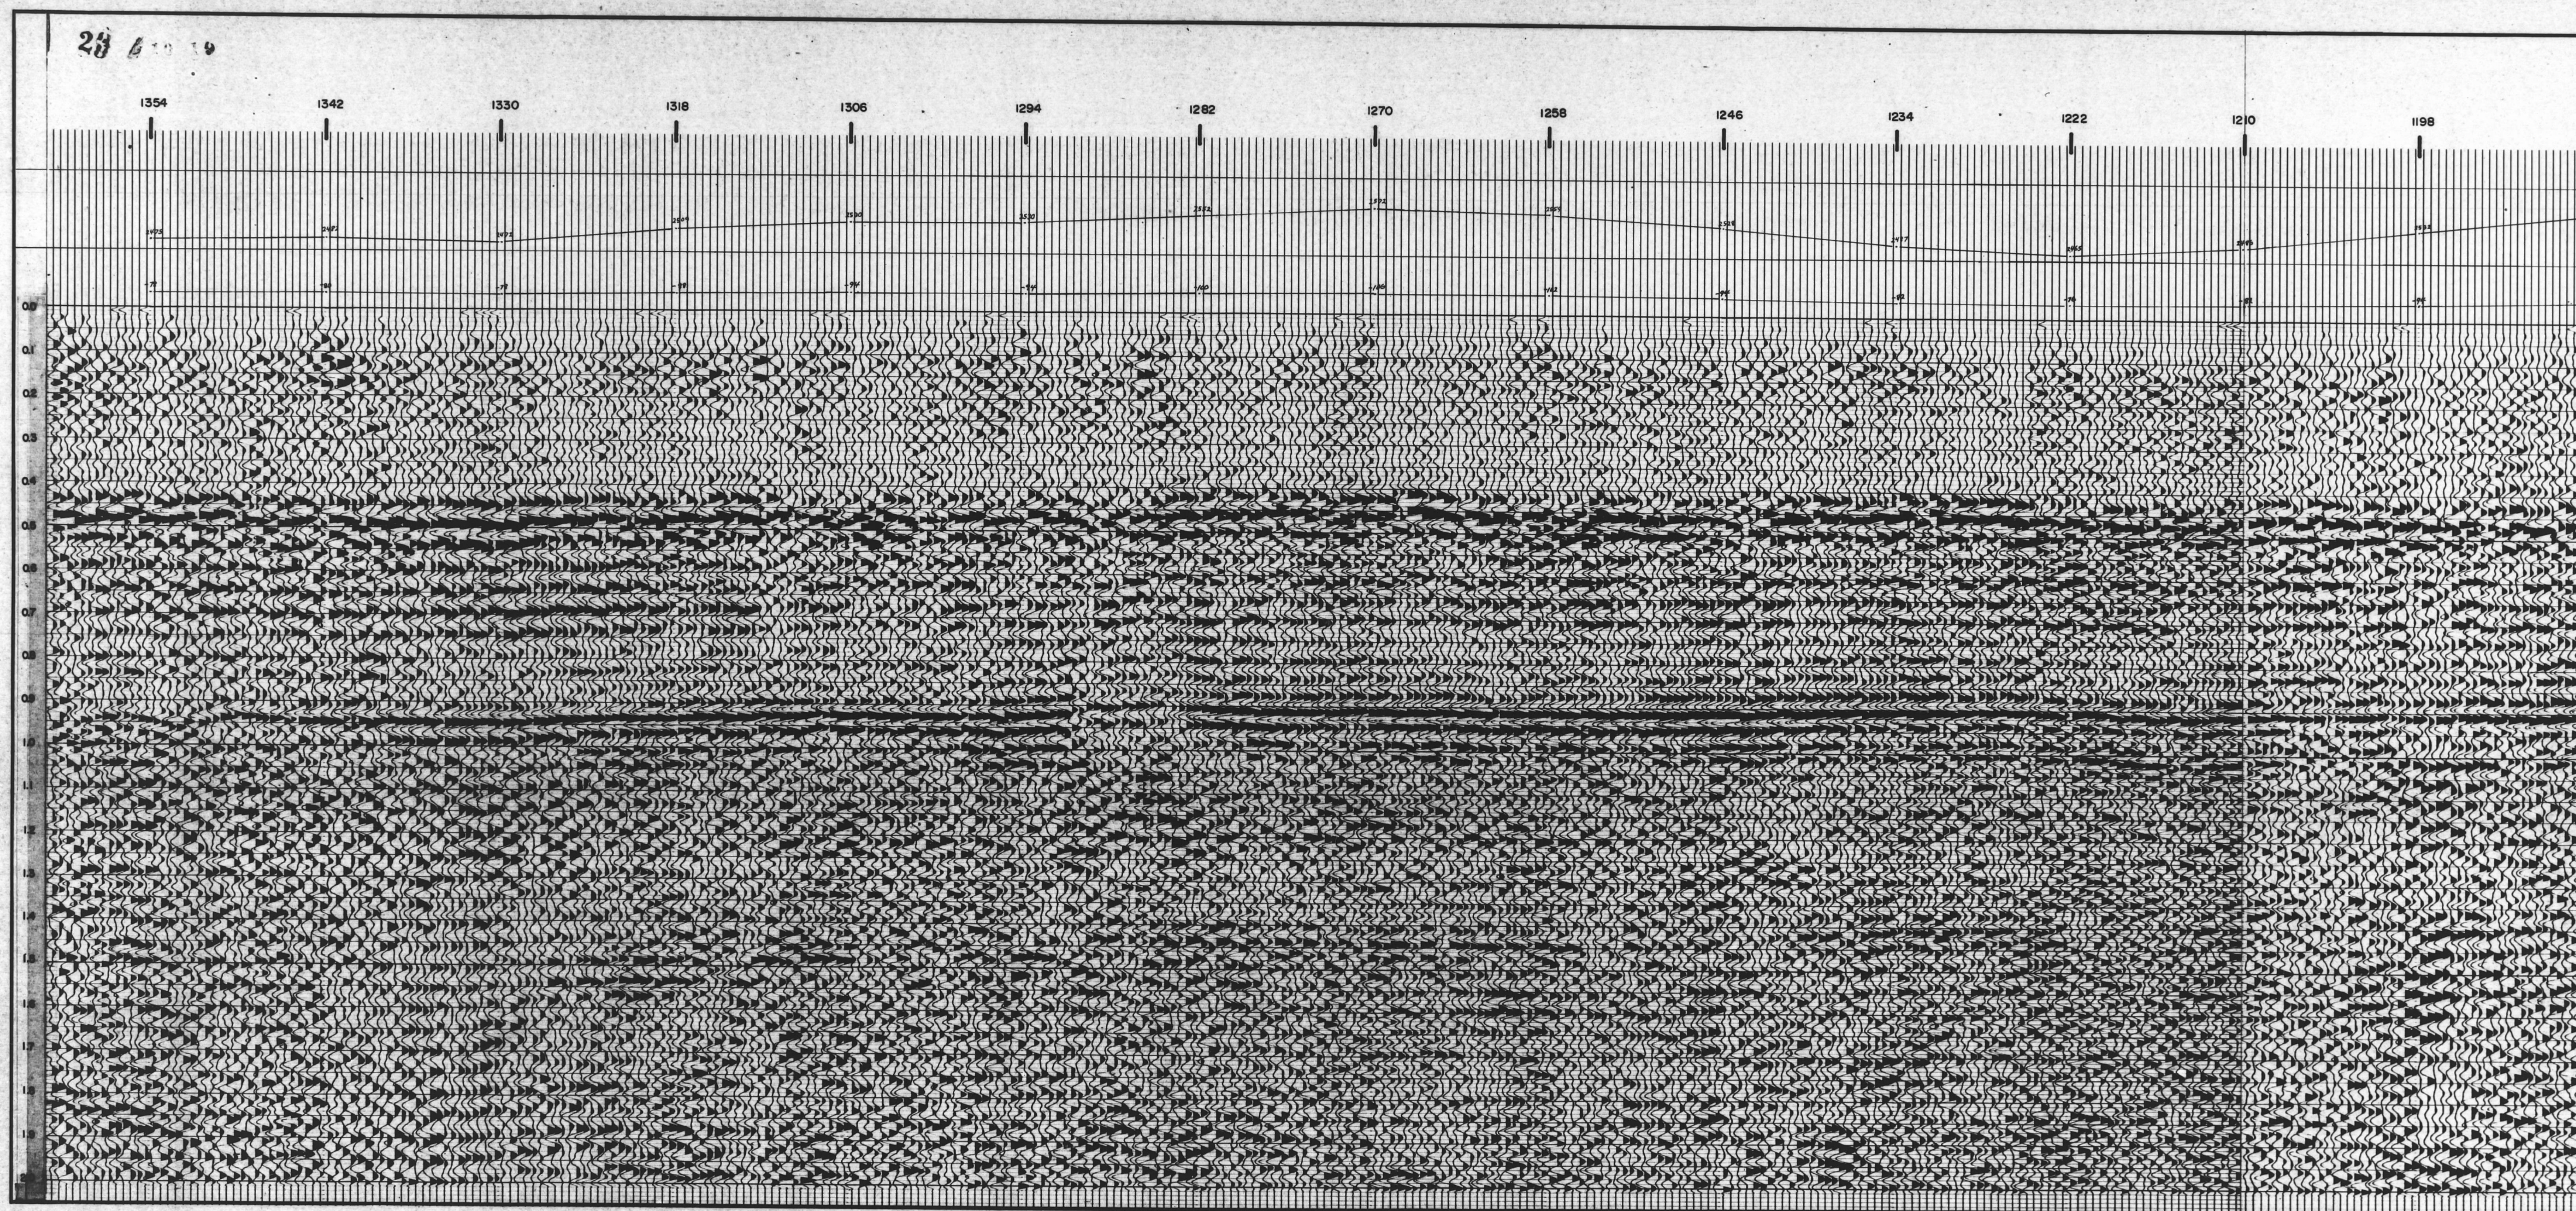

28 4 10 10