






NOTE FOR INDEX MAP SEE F-6797-E-1

TO ACCOMPANY REPORT ON CAMSELL BEND LAND BLOCK - GROUP 265
GOVERNMENT PROJECT 45-6-4-68-1

REVISIONS	CHEVRON STANDARD LIMITED		
	95-J-SE TRAIL RIVER AREA		
	SURFACE ELEVATION MAP		
	2 of 2		
SCALE	DATE	DRAWN	F-9830-12
1 INCH = 1 MILE	APRIL 9 1965	P. G.	

SEISMIC
56-D-7
45-6-6

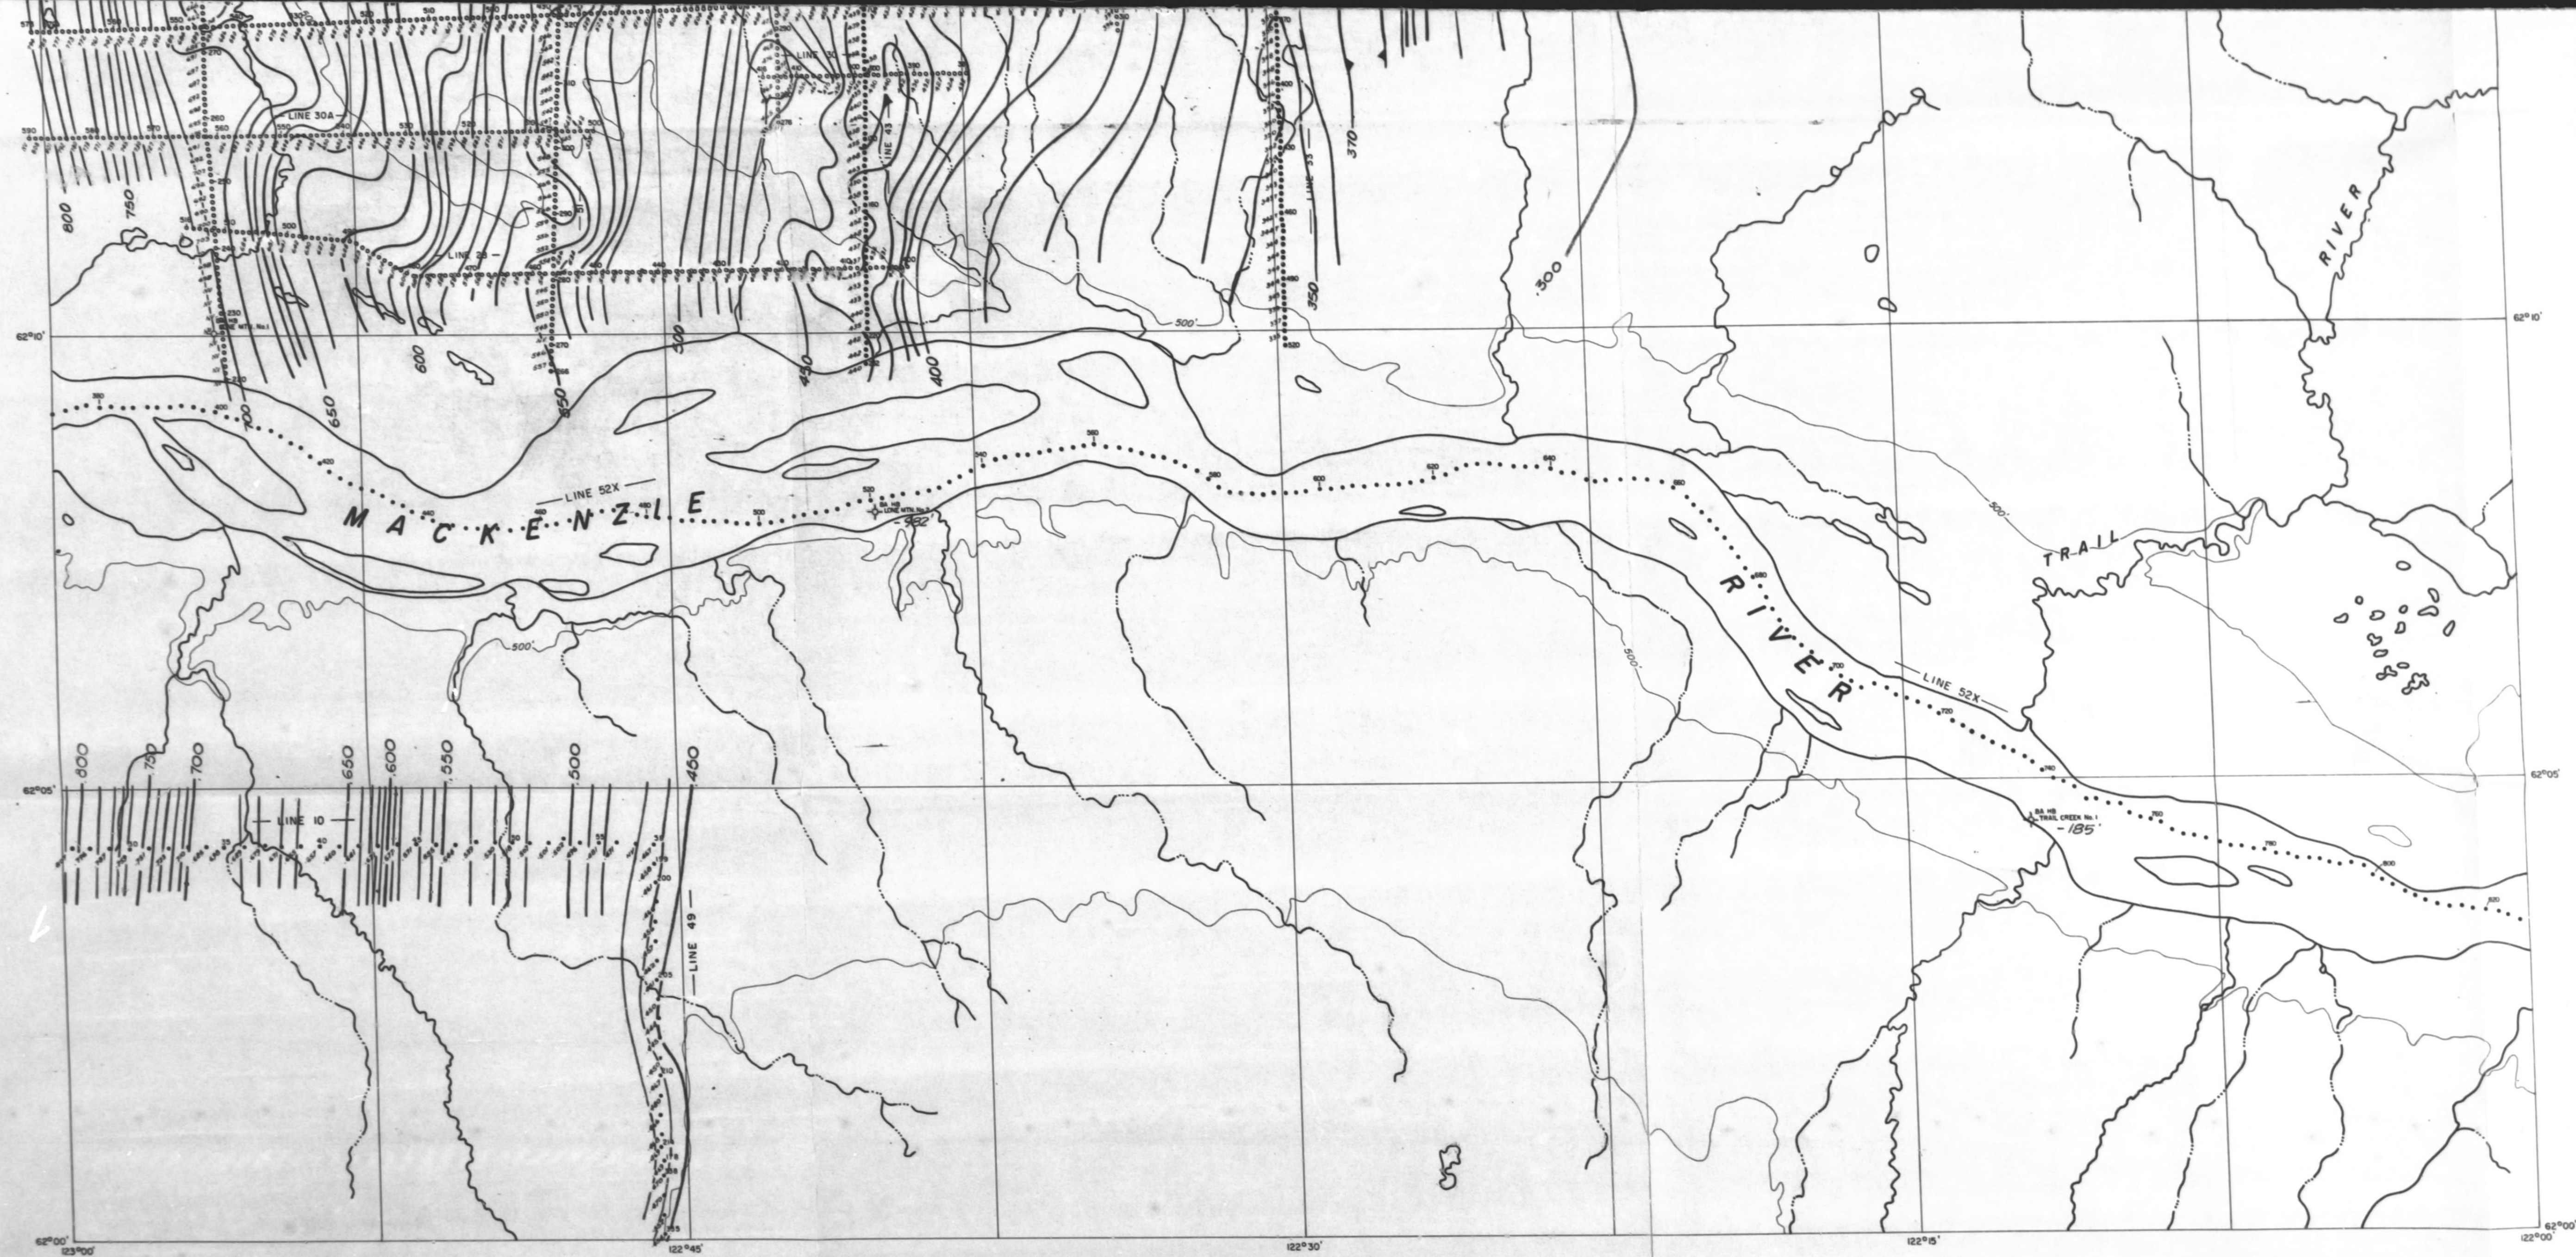

.010 IS APPROX. 55 fr.

NOTE FOR INDEX MAP SEE F-6797-E-1

REVISIONS	CHEVRON STANDARD LIMITED		
	95-J-SE TRAIL RIVER AREA TIME SEISMIC CONTOURS ON TOP OF NAHANNI		
	ER +1000'		APRIL 1968
	VR 11,000'/S		
	SCALE	DATE	DRAWN
	1 INCH = 1 MILE	APRIL 9 1965	P.G.
	F-9830- -4		

CONFIDENTIAL

Final Report on Seismic Survey
Conducted by Chevron Standard Limited
January-February 1970
Camsell Bend
Group 265 Gov. Project 45-6-4-69-6

CONFIDENTIAL

Area: Camsell Bend, N.W.T.

Government Project: 45-6-4-69-6

Group: 265

Final Report on Seismic Survey Conducted By:


Chevron Standard Limited

January - February 1970

Maps in the attached folder

Author: T. Webb

W. J. McCormack
W. J. McCormack - 1970
District Geophysicist

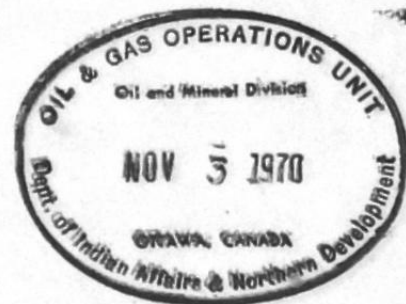

Contractor: Globe Universal Sciences Canada Limited

Government Project: 45-6-4-69-6

Group: 265

Area: Camsell Bend, N.W.T.

Maps: Trail River Area - Time structure on top of Nahanni

Trail River Area - S.P. location and surface elevation



CAMSELL BEND PERMITS



CAMSELL BEND
PERMITS

GROUP 265

4423	4422			63° 00'
4421	4420			
4419	4418			
	4406	4405	4404	62° 30'
4403	4402	4401		62° 10'
123° 00'	122° 30'	122° 00'		

GEOPHYSICAL DATA FOR SEISMIC SURVEY

LOCATION

Area and Province	<u>Camsell Bend, N.W.T.</u>
Longitude and Latitude	<u>122°W 62°30' N</u>
Permit Numbers and Government Project Number	<u>45-6-4-69-6</u>

TYPE OF SURVEY

Analog or Digital	<u>Digital (Binary Gain)</u>
Type of Source	<u>Dynamite</u>

FIELD RECORDING EQUIPMENT

Seismometer Model	<u>Mark Products L-10</u>
Seismometer Frequency	<u>14 cycle</u>
Seismometer Damping	<u>240</u>
Seismometer Base	<u>Flat winter base</u>
Amplifier Model	<u>T.I. D.F.S.-3</u>
Camera Model	<u>S.I.E. ERC-6</u>
Type of Magnetic Tape	<u>1 inch 21 track</u>
Digital System Model and Number	<u>D.F.S.-3 184 Ser.</u>
Land Survey Instrument and Method	<u>Wild T-16, Zeiss 6" Transit</u>
Cables	<u>Portable 900' sections 220' interval</u>

FIELD PROCEDURE AND OPERATIONS

<u>Refraction</u> Inline or Broadside	<u>Inline</u>
<u>Reflection</u> % of Subsurface Coverage	<u>600%</u>

Spread Configuration

Number Groups Recorded	24
Group Interval	220
Number Seismometers/Group	8
Seismometer Interval	20
Array Pattern	Inline

Source Configuration

Number of Holes and Depth	1 @ 40 feet
Spacing	Nil
Pattern	Nil
Inline or Offset to Spread	Inline
Charge Size and Type	5 Lbs. 2½ x 5 60%

Transportation

Type of Vehicles	Wheeled
Fixed Wing Aircraft	Beaver
Helicopter Support	

Terrain Conditions

General Terrain Description	Flat to rolling muskeg
-----------------------------	------------------------

RECORDING FACTORS

Monitor Record

Filter	Read after write	18/18 - 124
AVC		Binary Gain (Fast)
Gain		90 D.B.

Magnetic Tape

Filter		18/18 - 124
AVC		Binary Gain (Fast)
Gain		90 D.B.
Sample rate	2MS	

Field Playbacks

Filter

Nil

AVC

Nil

Gain

Nil

Mixing

Nil

PERSONNEL

Field

J. Curzon - Supervisor

G. Mueller - Party Manager

Office

G. Hood - Ass't. Party Manager

Titleholders

J. Fraser - Head Surveyor

Individual Responsibility

R. Lubeseder - Surveyor

Contractors

D. Janveau - Senior Observer

L. Young - Observer

A. Skjerven - Shooter

Smith Brothers

Siesform Drilling

Double R Drilling

Campbell Contractors

Caribou Construction

OFFICE TECHNIQUES

Datum Computation

N/A

Weathering Sections

N/A

Record Sections	<u>N/A</u>
Type of Display	<u>VA/WT</u>
Maps	<u>Attached Folder</u>

STATISTICS SUMMARY

Number of Working Days	<u>16</u>
<u>Number of Profiles</u>	
Reflection	<u>860</u>
Refraction	<u>80</u>
Total Production	<u>940</u>
Miles of Surface Coverage	<u>75.10</u>
Miles of Subsurface Coverage	<u>75.10</u>
Number of Shot Holes Drilled	<u>940</u>
Total Footage Drilled	<u>37,600</u>

TRANSMITTAL OF RECORDED DATA