


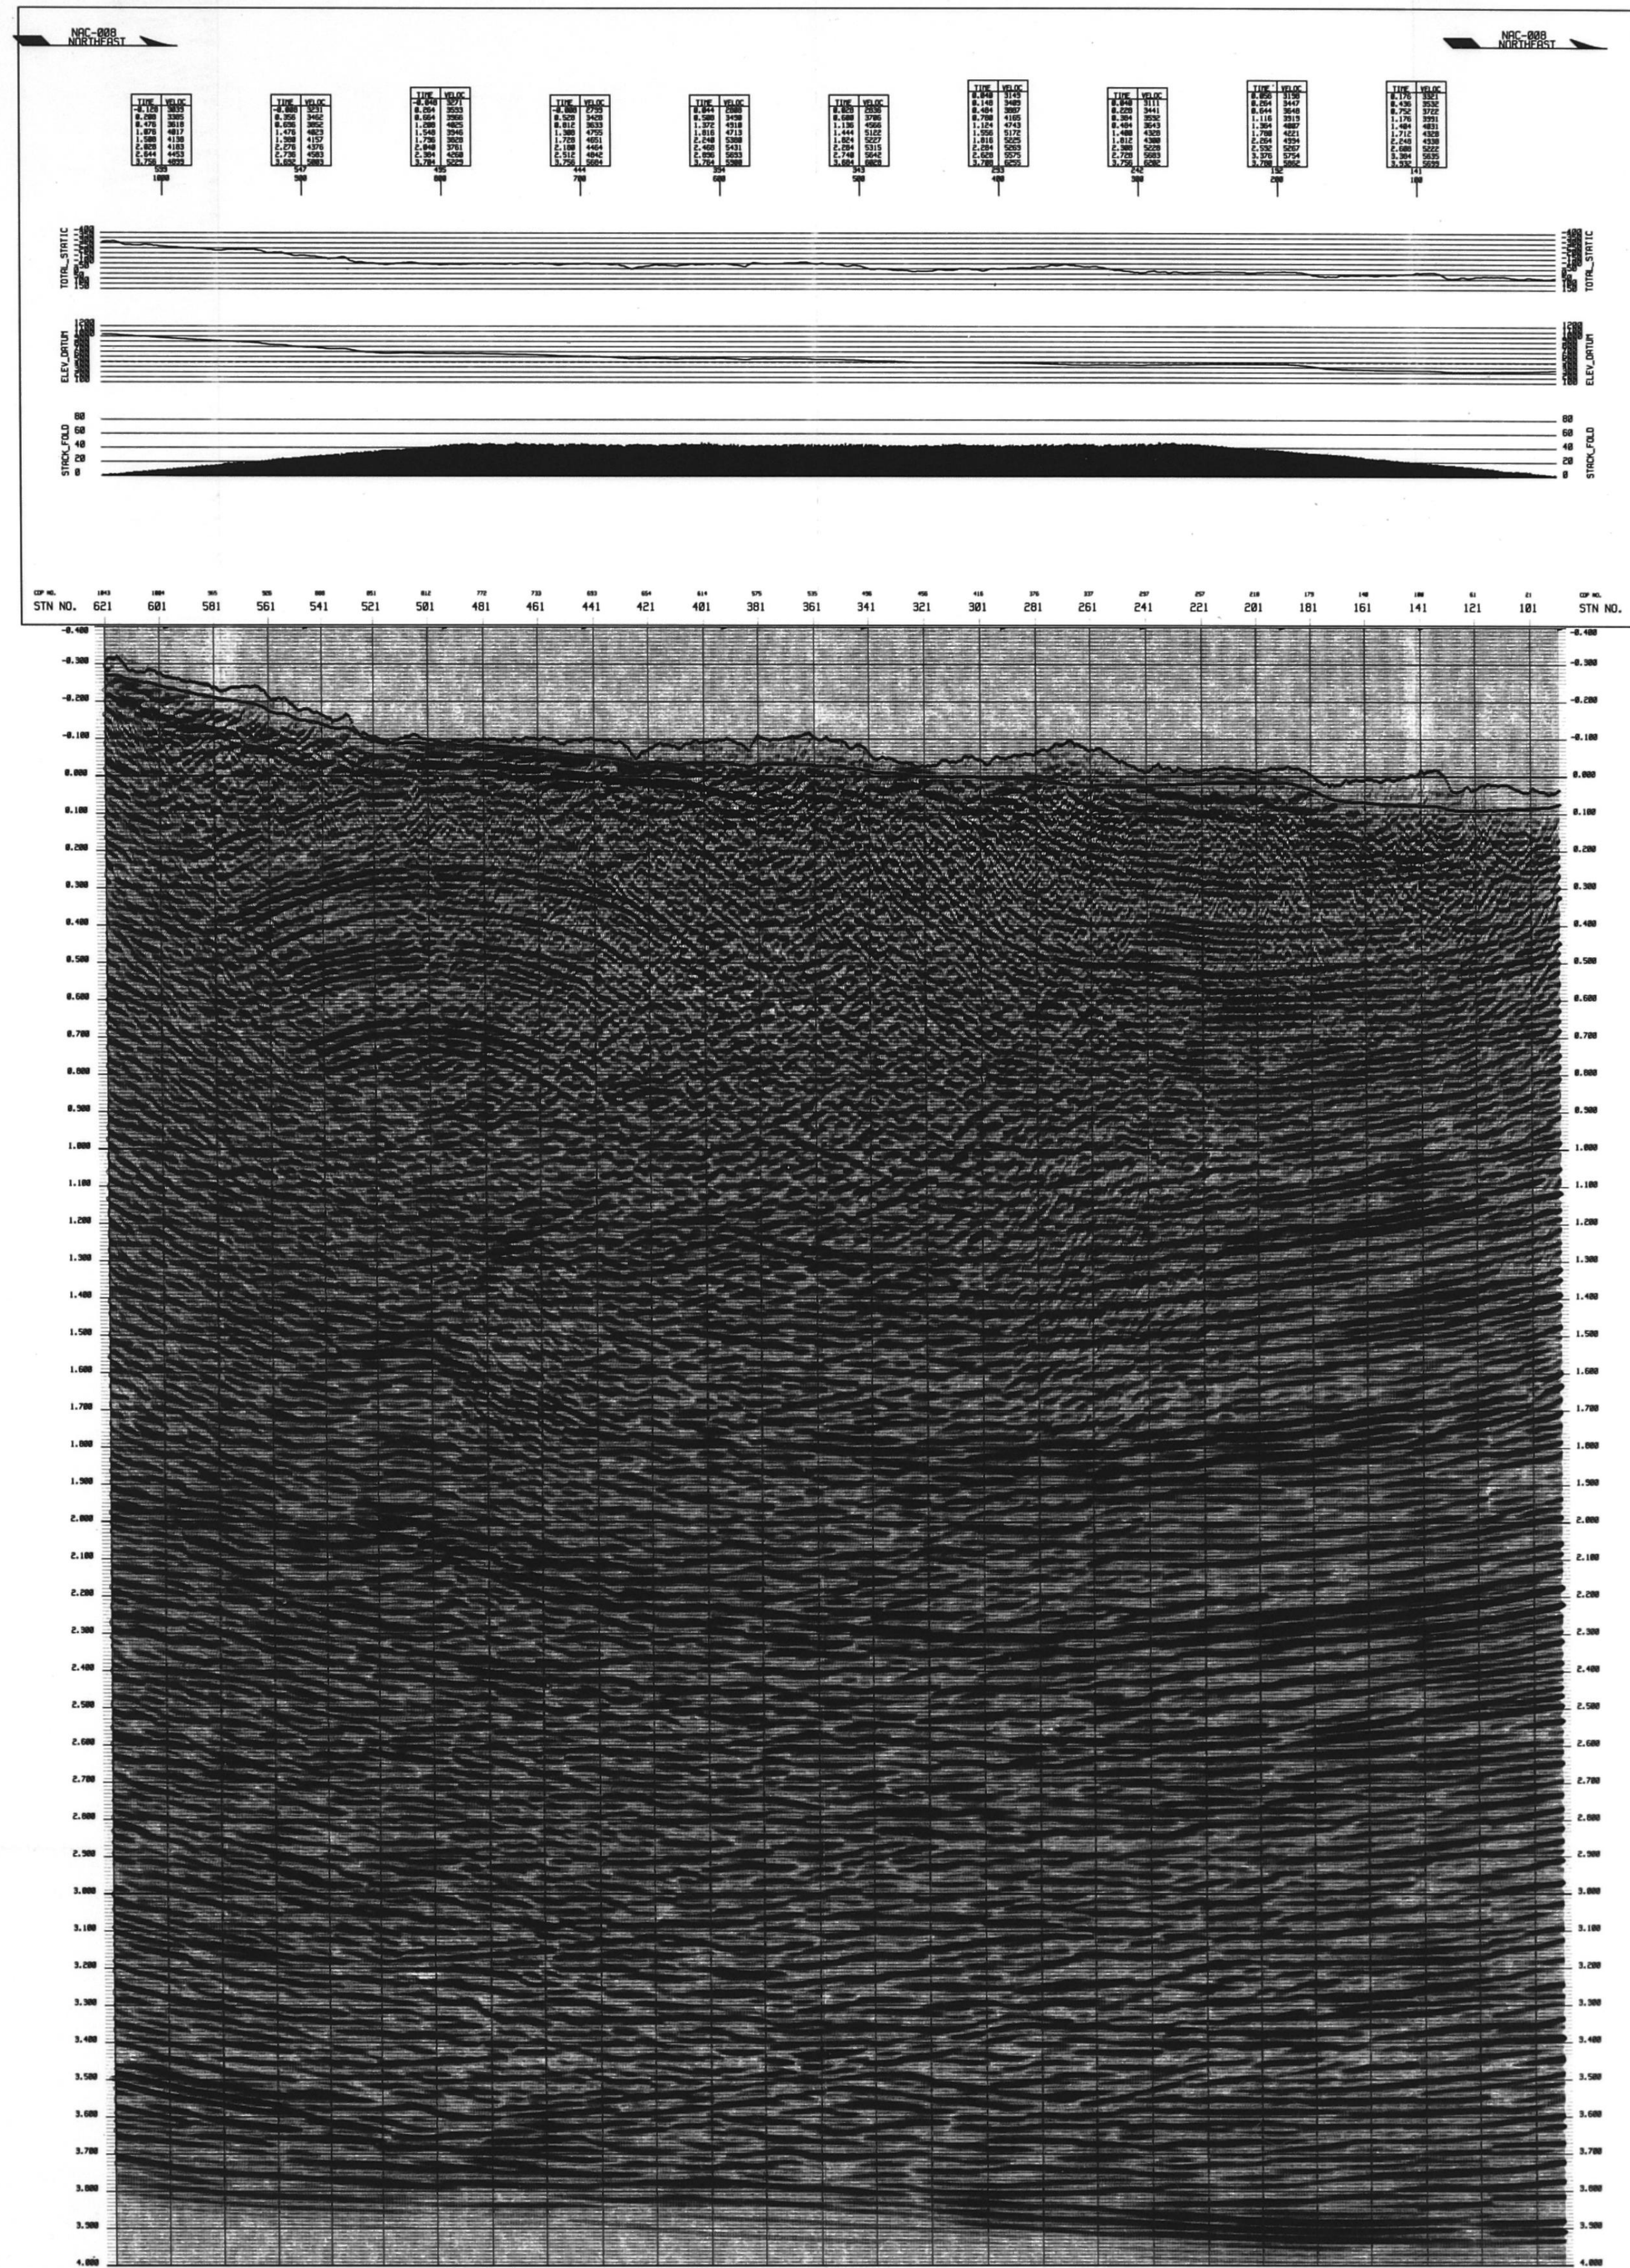

RANGER OIL LTD.	
9229-859-4E MOUNT FLETT LINE NAC-008 SPS: 90-621 PRE STACK MIGRATION	
DISPLAY POLARITY NORMAL	
STATICS PARAMETERS DATE: 500 H REFL VEL: 4800 M/S	
FIELD PARAMETERS SHOT FOR: RANGER OIL LTD. DATE: 1990 SHOT BY: GEC-PHILIPS PARTIAL LOG INSTRUMENTS: GEOPHONES TYPES: 100 GEOPH. 100 HZ S.N. 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 FILTRATION: 12-15 HZ CUT OFF FREQUENCY: 5 HZ SOURCE: TYPE: COMBUSTIBLE SPREAD: 1500 FT CHARGE SIZE: 250 KG S.P. INT: 100 H CHARGE DEPTH: 10 M S.P. INT: 100 H NO. TRACES: 1 STAG: 1	
SPEED CONFIGURATION TRACES: 1-200-4-201-400-1 NORTHWEST 400-5-100-5-201-4-400-5 H	
PROCESSED AUGUST 1990 BY KELMAN SEISMIC PROCESSING	
PROCESSING SEQUENCE DEMULTIPLEX 2.0 SEC PULSE SHARPENING 2.0 SEC AMPLITUDE RECOVERY 2.0 SEC CORRECTION FOR GAIN 2.0 SEC TRACE EDITING 2.0 SEC PHASE CORRECTION 2.0 SEC DECONVOLUTION 2.0 SEC INSTRUMENT AND GEOPHONE TYPE: 100 GEOPH. 100 HZ S.N. 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 FILTRATION: 12-15 HZ CUT OFF FREQUENCY: 5 HZ SOURCE: TYPE: COMBUSTIBLE SPREAD: 1500 FT CHARGE SIZE: 250 KG S.P. INT: 100 H CHARGE DEPTH: 10 M S.P. INT: 100 H NO. TRACES: 1 STAG: 1	
EQUALIZATION TYPE: 100 GEOPH. 100 HZ S.N. 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 FILTRATION: 12-15 HZ CUT OFF FREQUENCY: 5 HZ SOURCE: TYPE: COMBUSTIBLE SPREAD: 1500 FT CHARGE SIZE: 250 KG S.P. INT: 100 H CHARGE DEPTH: 10 M S.P. INT: 100 H NO. TRACES: 1 STAG: 1	
VELOCITY ANALYSIS TYPE: 100 GEOPH. 100 HZ S.N. 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 FILTRATION: 12-15 HZ CUT OFF FREQUENCY: 5 HZ SOURCE: TYPE: COMBUSTIBLE SPREAD: 1500 FT CHARGE SIZE: 250 KG S.P. INT: 100 H CHARGE DEPTH: 10 M S.P. INT: 100 H NO. TRACES: 1 STAG: 1	
STATISTICS (RESIDUAL) TYPE: 100 GEOPH. 100 HZ S.N. 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 FILTRATION: 12-15 HZ CUT OFF FREQUENCY: 5 HZ SOURCE: TYPE: COMBUSTIBLE SPREAD: 1500 FT CHARGE SIZE: 250 KG S.P. INT: 100 H CHARGE DEPTH: 10 M S.P. INT: 100 H NO. TRACES: 1 STAG: 1	
PRE-STACK MIGRATION TYPE: 100 GEOPH. 100 HZ S.N. 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 FILTRATION: 12-15 HZ CUT OFF FREQUENCY: 5 HZ SOURCE: TYPE: COMBUSTIBLE SPREAD: 1500 FT CHARGE SIZE: 250 KG S.P. INT: 100 H CHARGE DEPTH: 10 M S.P. INT: 100 H NO. TRACES: 1 STAG: 1	
FINAL DISPLAY TYPE: 100 GEOPH. 100 HZ S.N. 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 FILTRATION: 12-15 HZ CUT OFF FREQUENCY: 5 HZ SOURCE: TYPE: COMBUSTIBLE SPREAD: 1500 FT CHARGE SIZE: 250 KG S.P. INT: 100 H CHARGE DEPTH: 10 M S.P. INT: 100 H NO. TRACES: 1 STAG: 1	
DISPLAY PARAMETERS HORIZONTAL: 50.00 TRACES/INCH VERTICAL: 5.00 INCHES/SECOND 400 HZ/INCH	