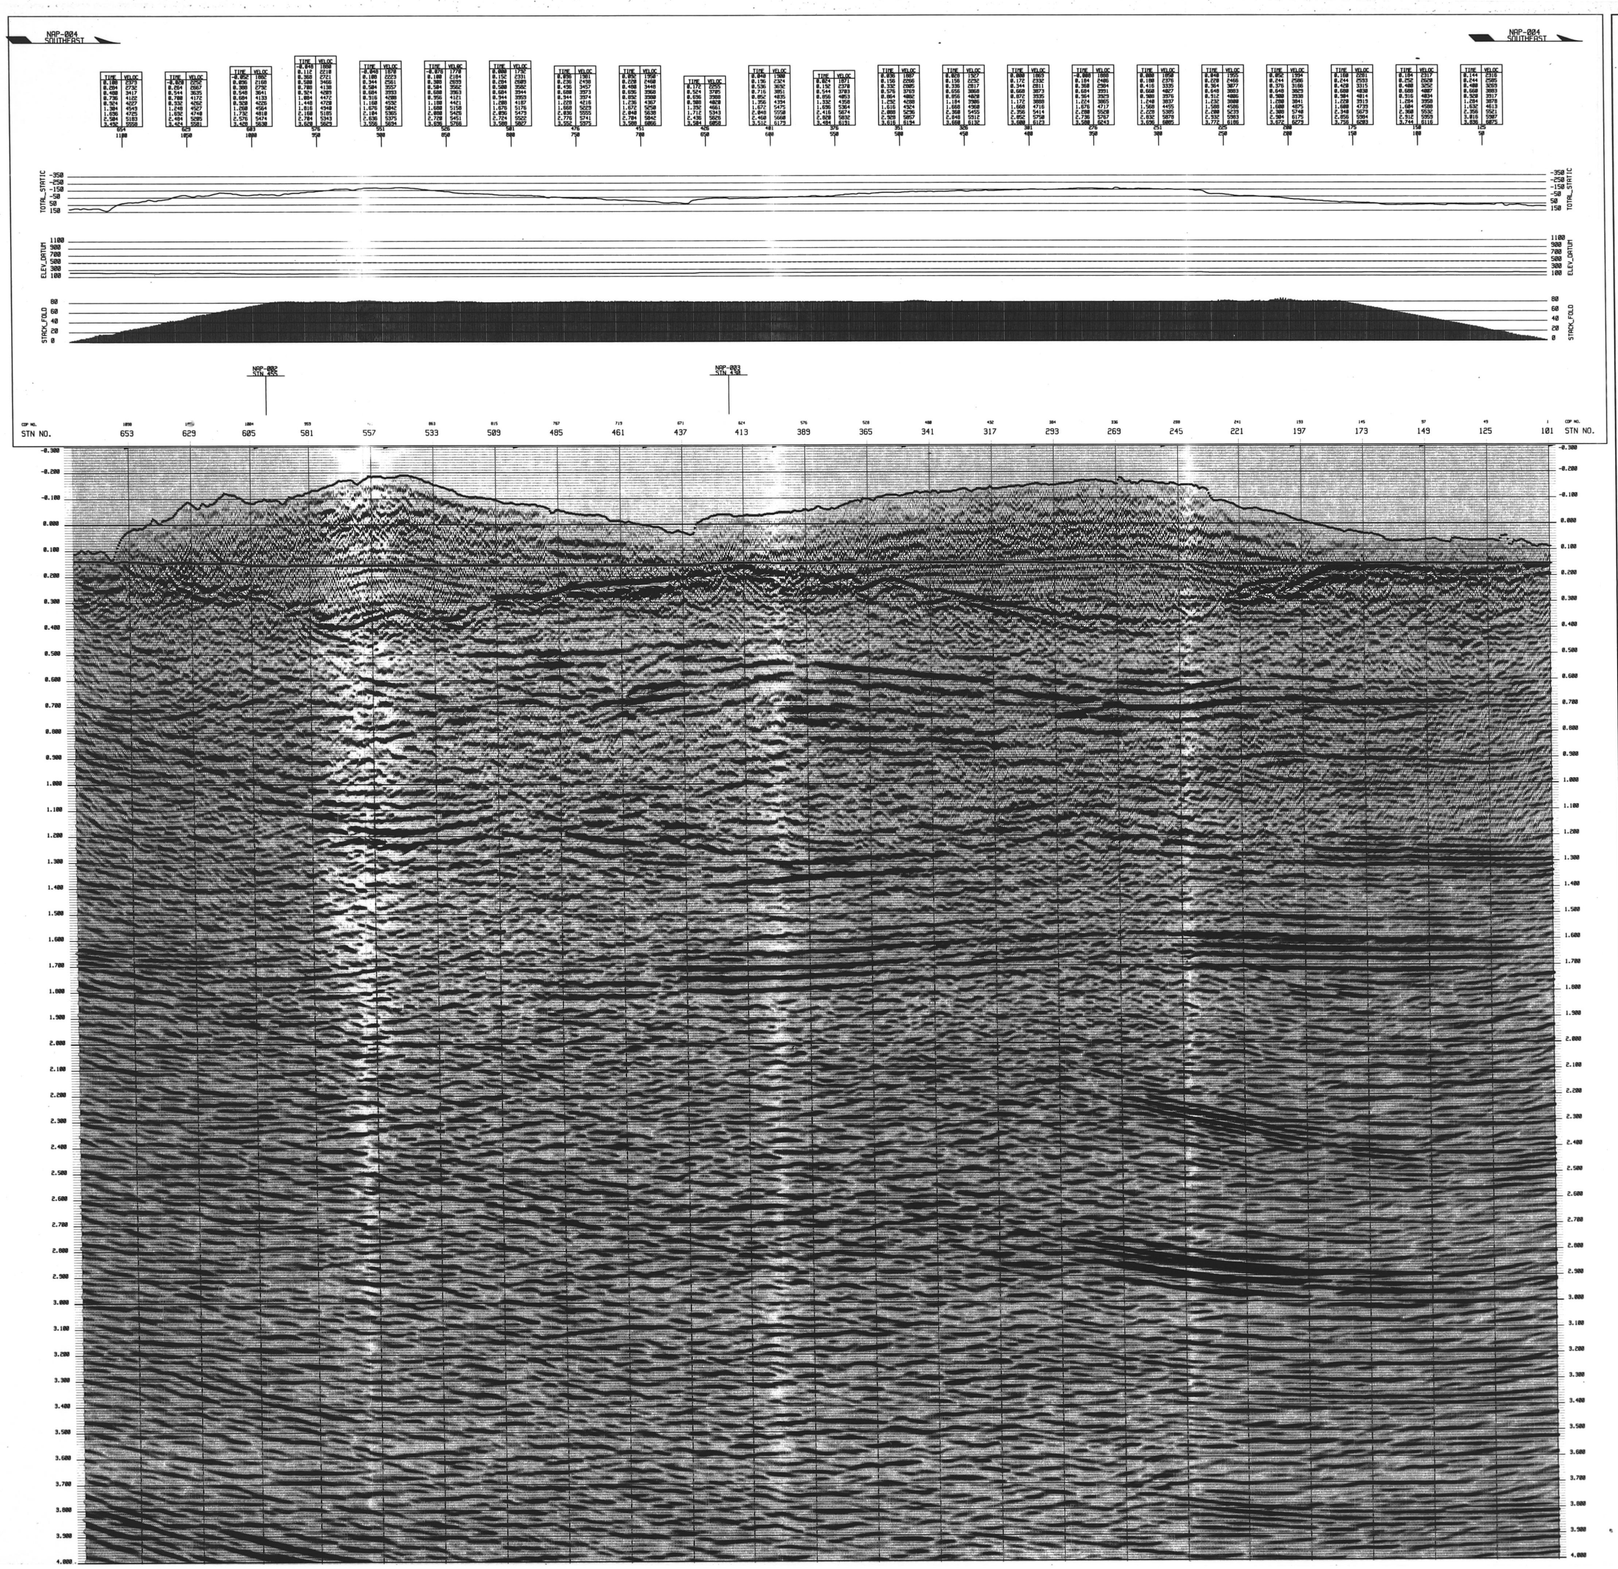

RANGER OIL LTD.

9229-B59-5E
FT. LIARD

LINE NAP-004
SPS: 101 - 674

POST STACK MIGRATION

DISPLAY POLARITY
NORMAL

STATICS PARAMETERS
DATUM: 500 M REPL VEL: 4000 M/S

FIELD PARAMETERS

SHOT FOR: RANGER OIL LTD. , APRIL 1997
SHOT BY: GECO-PRAKLA , PART1-1264

INSTRUMENTS
MAKE/MODEL: I/O II
S.R.: 2 MS LENGTH: 5 SEC
FILTER: 3-135 NOTCH OUT
FORMAT: SEG-D

GEOPHONES
TYPE: OYO G5200X, 10 HZ
DAMPING: 0.7
NUMBER/GROUP: 9
GROUP LENG: 20 M

SOURCE
TYPE : VIBROSEIS
MODEL : 4 X 4
SWEEP : 10-100 HZ
LENGTH : 12 SEC

SPREAD
FOLD : 8000 PCT
S.P. INT : 40 M
GRP. INT : 20 M

SPREAD CONFIGURATION
TRACES: 1----------323 TRACE 1 SOUTHERST
3220.0----------0.0 M

PROCESSED JULY 1997 BY
KELMAN SEISMIC PROCESSING

PROCESSING SEQUENCE

DEMULTIPLEX
PROCESS SAMPLE RATE: 2.0 MS
PROCESS RECORD LENGTH: 5.0 SEC

AMPLITUDE RECOVERY
EXPONENTIAL GAIN CURVE: M(T)=PWR(X(CDP,RT)) X=1 B=0 N=2

TRACE EDITING

PHASE COMPENSATION
TYPE: GEOPHONE

VIBROSEIS PHASE COMPENSATION:
METHOD: CLAUSER WAVELET TO MINIMUM PHASE

DECONVOLUTION
TYPE: SURFACE CONSISTENT SPIKING
OPERATOR LENGTH: 88 MS
PREWHITENING: 1.0%
DESIGN GATE: 4000 - 2088 MS AT 0DM OFFSET
1400 - 2388 MS AT 3000M OFFSET
OFFSET RANGE: 0000 - 1000 M

PARTIAL SPECTRAL BALANCING
FREQUENCY: 18 - 108 HZ

EQUALIZATION
DESIGN GATE: SAME WINDOW AS DECON

STATICS (REFRACTION)
METHOD: GLI
FREQUENCY SPECTRUM: EVERY SHOT
DATUM ELEVATION: 500 M
WEATHERING VELOCITY: 750 M/SEC
REPLACEMENT VELOCITY: 4000 M/SEC

SORT
TO COMMON DEPTH POINT

VELOCITY ANALYSIS
TYPE: CONSTANT PERCENTAGE MOVEOUT

STATICS (RESIDUAL)
TYPE: AUTOMATIC SURFACE CONSISTENT
CORRELATION WINDOW: 300 - 3000 MS
MAXIMUM SHIFT: +/- 32 MS
CORRELATIONS PER TRACE: 15
NUMBER OF ITERATIONS: 2

VELOCITY ANALYSIS
TYPE: CONSTANT PERCENTAGE MOVEOUT

STATICS (RESIDUAL)-SECOND PASS
TYPE: AUTOMATIC SURFACE CONSISTENT
CORRELATION WINDOW: 300 - 3000 MS
MAXIMUM SHIFT: +/- 16 MS
CORRELATIONS PER TRACE: 15
NUMBER OF ITERATIONS: 2

NORMAL MOVEOUT CORRECTION:
DATUM REFERENCED, TO PLOTTED WEATHERING REPLACED SURFACE, SEPARATELY BY SHOT AND RECEIVER

MUTE PATTERN
DISTANCE: 440 640 3220 M
TIME: -300 500 000 MS

STACK
SPIKE SUPRESSION: 3:1 THRESHOLD
FOLD: 80

MIGRATION
TYPE: KIRCHHOFF SUPRATION
MIX: 100 PCT SHOTPOINT STACKING

FILTER
FREQUENCY: 18/25 - 45/55 HZ

EQUALIZATION
DESIGN WINDOW: 600 MS AGC

FINAL DISPLAY

1KM BLIP INCREMENT

DISPLAY PARAMETERS
HORIZONTAL: 40 TRACES/INCH VERTICAL: 5 INCHES/SECOND
400 M/INCH 400 M/INCH

TRIATHLON GEOPHYSICAL SERVICES LTD.

PROJ. NO. 9229 B59 5E

LINE NO. NAP-4

PART NO. 1 OF 1

R.R. 8X