

9229-C20-1E

'EAST'

LINE: 85-370 70-144-13

WESTERN GEOPHYSICAL LTD.
CALGARY ALBERTA
PROCESSING DATE: APRIL 1986
PROCESSED FOR: CANADIAN SUPERIOR OIL LTD.

AREA: CAMERON HILLS
LINE: 85-370
S.P.: 661 - 121
DIR.: WEST - EAST
NTS GRID: 84 N-13/14
LOCATION: 85 C-3/4
POLARITY: T126 R18-21 W5M+NW
REF. VEL.: 2250 M/S
DATE: 1986

STRUCTURAL STACK

FIELD PARAMETERS
SHOT FOR: CANADIAN SUPERIOR OIL LTD.
SHOT BY: SONIX EXPLORATION LTD.
DATE: MARCH 1986

SPREAD
SHOOTING DIRECTION: W - E
FOLD: 1500X
STATION INT.: 18 M
SHOT PT. INT.: 1
SPREAD: (TR) 72 M
DIST: (M) 1152 -- 60 61 120
(M) 90 X 90 --- 1152

RECEIVER
MAKE/MODEL/TYP: OYO / 14HZ
NUMBER PER GROUP: 9
SPACING: 2.25M
ARRAY: INLINE

SOURCE
TYPE: VIBROSEIS
VIBRATOR MODEL: LRS-315
NUMBER OF SOURCES: 3
ORAG LENGTH: 7 MOVES OF 5.14 M
SWEEP FREQUENCY: VARI-SWEEP (8 SWEEPS)
1. 15 - 75 HZ
2. 20 - 80 HZ
3. 25 - 85 HZ
4. 27 - 87 HZ
5. 30 - 90 HZ
6. 33 - 93 HZ
7. 35 - 95 HZ
8. 40 - 100 HZ
SWEEP LENGTH: 12 SEC


INSTRUMENTS
MAKE/MODEL: FTI - OFS-V
RECORD LENGTH: 2 SEC
SAMPLE RATE: 2 MS
FILTER: 8 - 128 HZ
NOTCH: OUT
TAPE FORMAT: SEG B
TAPE DENSITY: 1600 BPI


PROCESSED BY WESTERN GEOPHYSICAL DIVISION OF LITTON INDUSTRIES

PROCESSING PARAMETERS

- DEMULPLEX
OUTPUT SAMPLE RATE: 2 MS
OUTPUT DATA LENGTH: 2 SECONDS
- GEOMETRY
LINE, PATTERN, SOURCE, ELEVATION STATIC
- AMPLITUDE RECOVERY
TYPE: SPHERICAL DIVERGENCE
- DEPHASING
GEOPHON: 14 HZ 60X DAMPING
- DECONVOLUTION
TYPE: PREDICTIVE
PREDICTION DISTANCE: 12 MS
OPERATOR LENGTH: 60 MS
PREWHITENING: 0.12
APPLICATION WINDOW: 0 - 2000 MS
DESIGN WINDOW (NEAR OFFSET- 90 M): 200 - 1200 MS
DESIGN WINDOW (FAR OFFSET-1152 M): 800 - 1200 MS
- CDP GATHERS
- STATICS
INTERACTIVE REFRACTION ANALYSIS
DRIFT AND WEATHERING CORRECTIONS
8. VELOCITY ANALYSIS (VELAN)
REFERENCED TO SURFACE
- NORMAL MOVEOUT APPLICATION
REFERENCED TO SURFACE
- AUTOMATIC SURFACE CONSISTENT STATICS (MISER)
WINDOW: 350 - 1100 MS
MAXIMUM SHIFT: 1/2 - 24 MS
NO. OF ITERATIONS: 3
- RE-ITERATION OF 8 AND 9
- REFLECTION STRENGTH GAIN
STANDOUT AFTER GAIN: 1.75
- TRACE MUTE
OFFSET (M): 230 310 900 1160
TIME (MS): 0 300 900 1000
- CDP STACKING
STACKING FOLD: 1500 X
WINDOW: 350 - 1100 MS
MAXIMUM SHIFT: 1/2 - 12MS
MODEL TRACES: 5 TRACES
- AUTOMATIC TRIM STATICS (C.D.P.)
- FILTER APPLICATION
TYPE: BANDPASS
PASSBAND: 18/18 - 60/36 APPLICATION: 0 - 2000 MS
- GAIN (RMS)
LENGTH OF FIRST GAIN ZONE: 400 MS
LENGTH OF LONGEST GAIN ZONE: 400 MS
2000 RMS AMPLITUDE
- DISPLAY SCALE
HORIZONTAL SCALE: 12 TRACES/INCH
VERTICAL SCALE: 7.5 INCHES/SEC
GEOSPACE PLOTTING GAIN: 1108
1 INCH = 216 METERS

G.C. GEOPHYSICIST: R.E. DIMENT

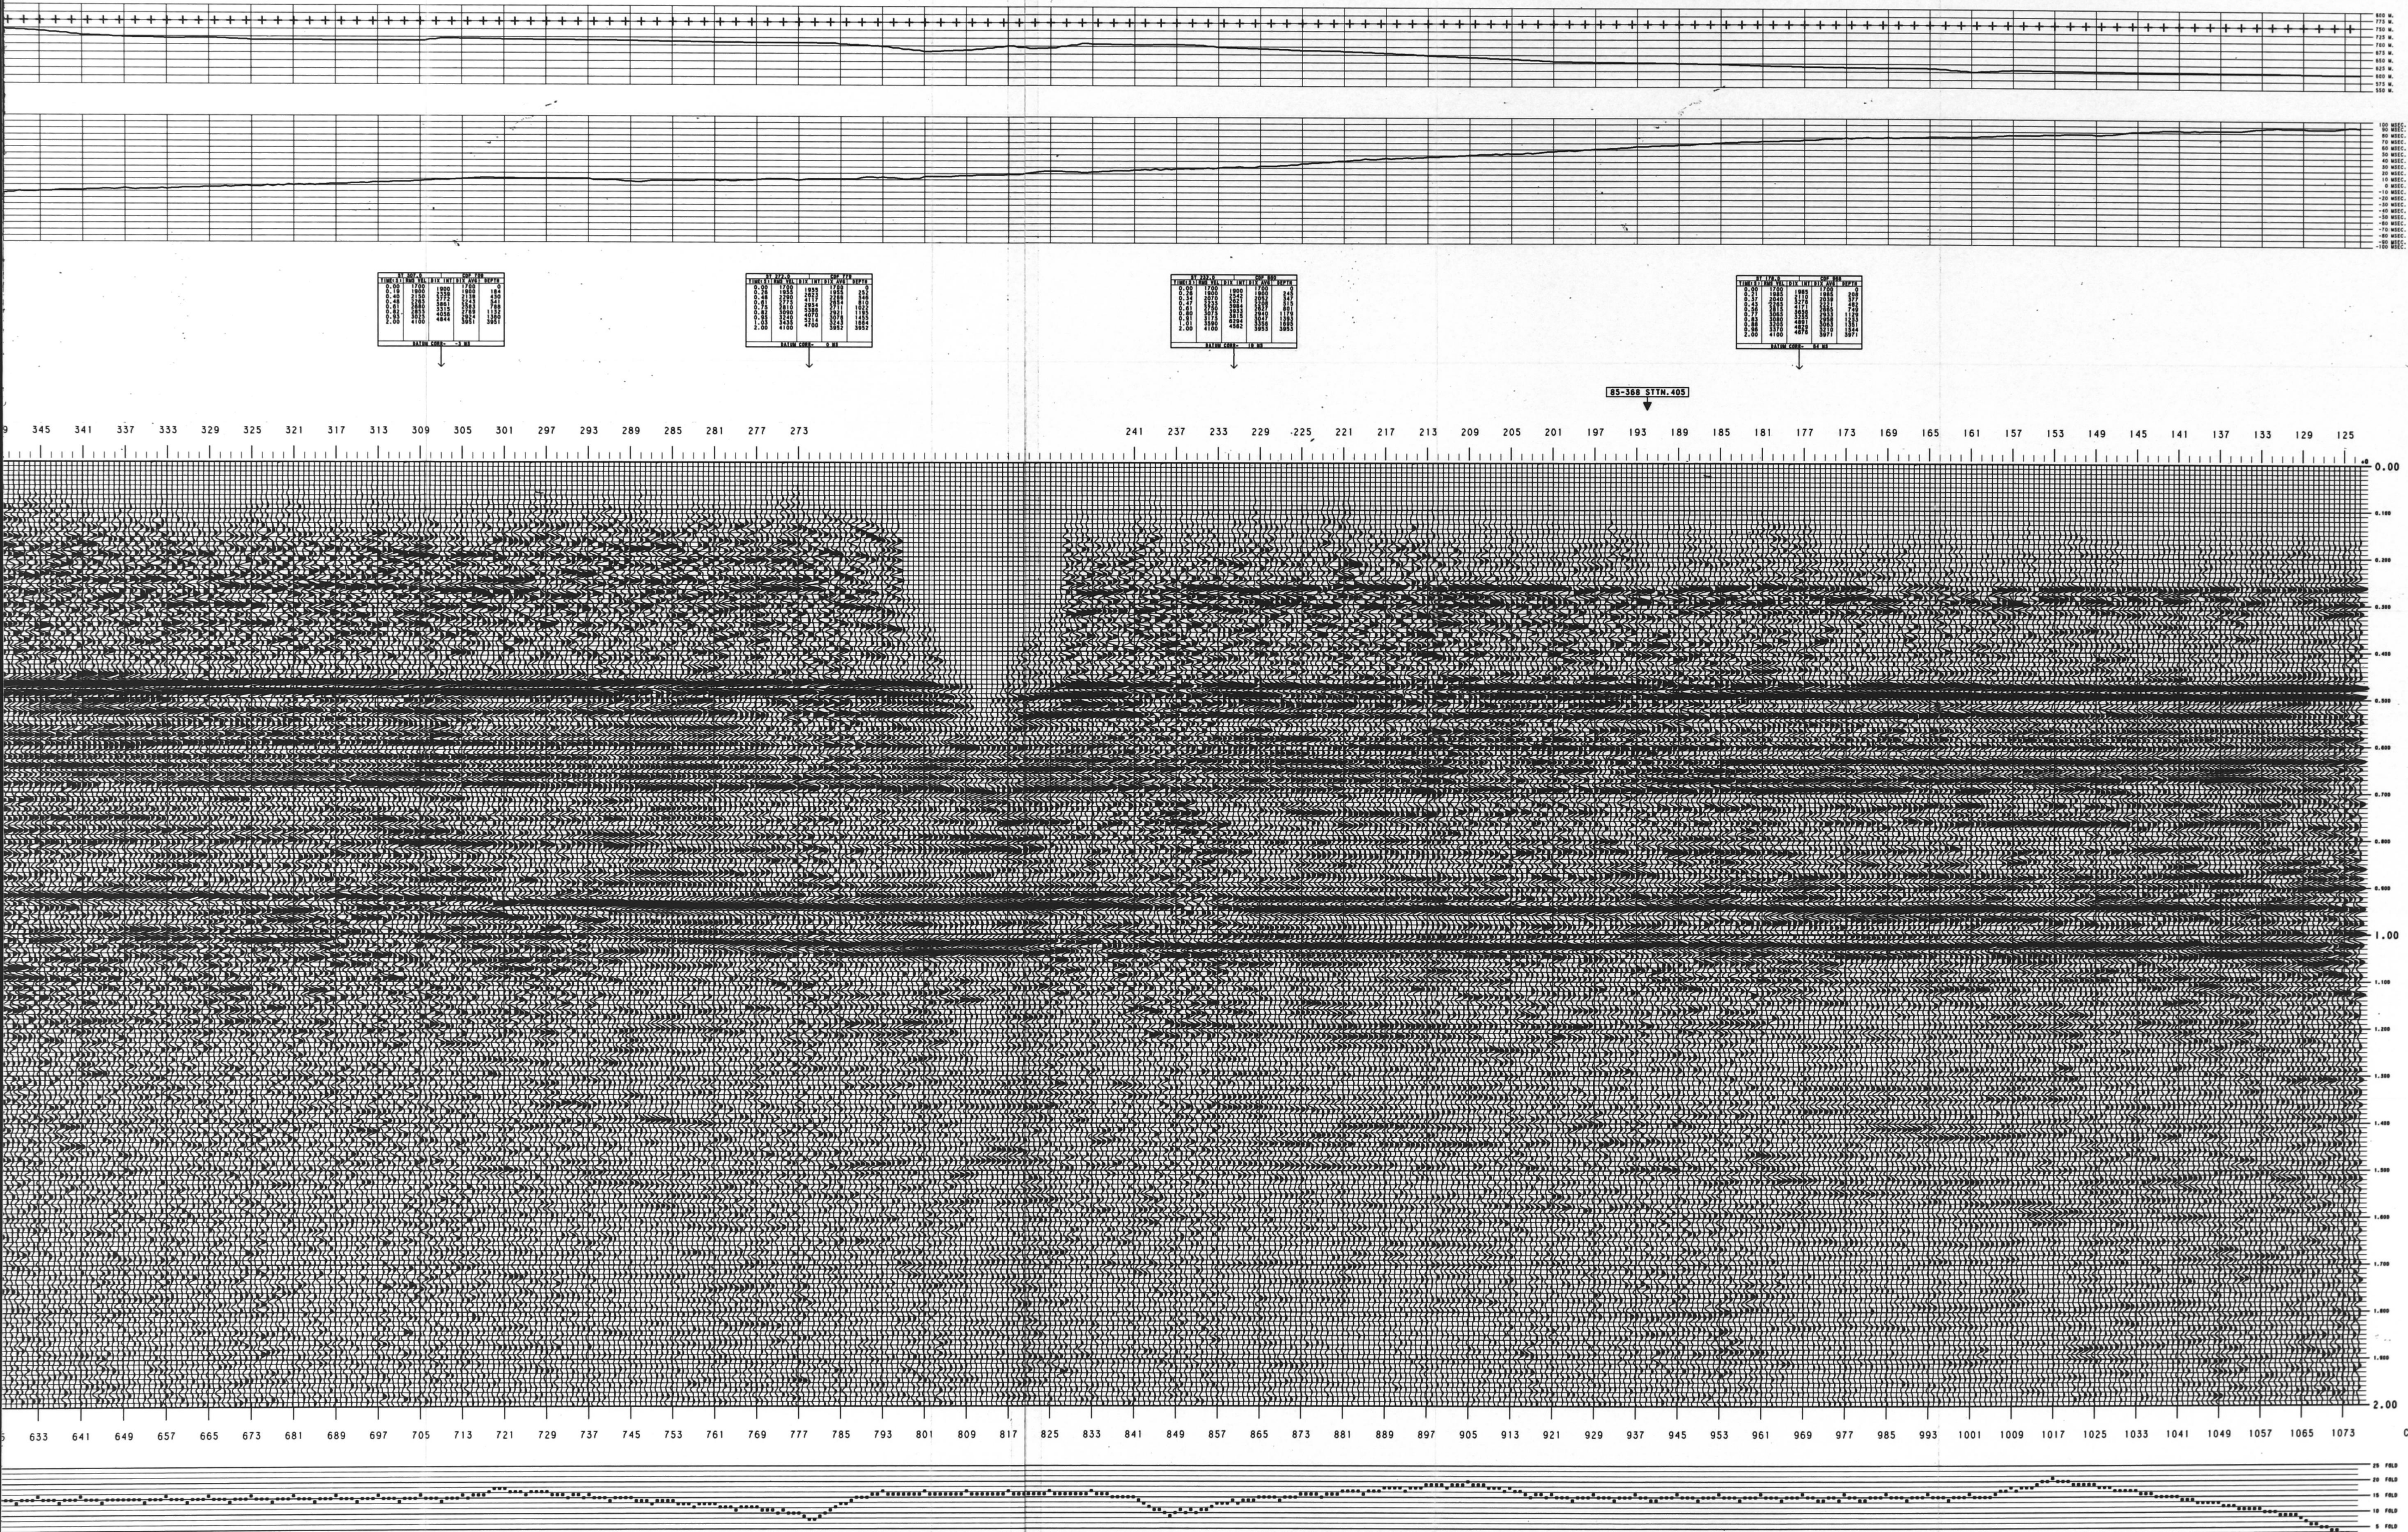

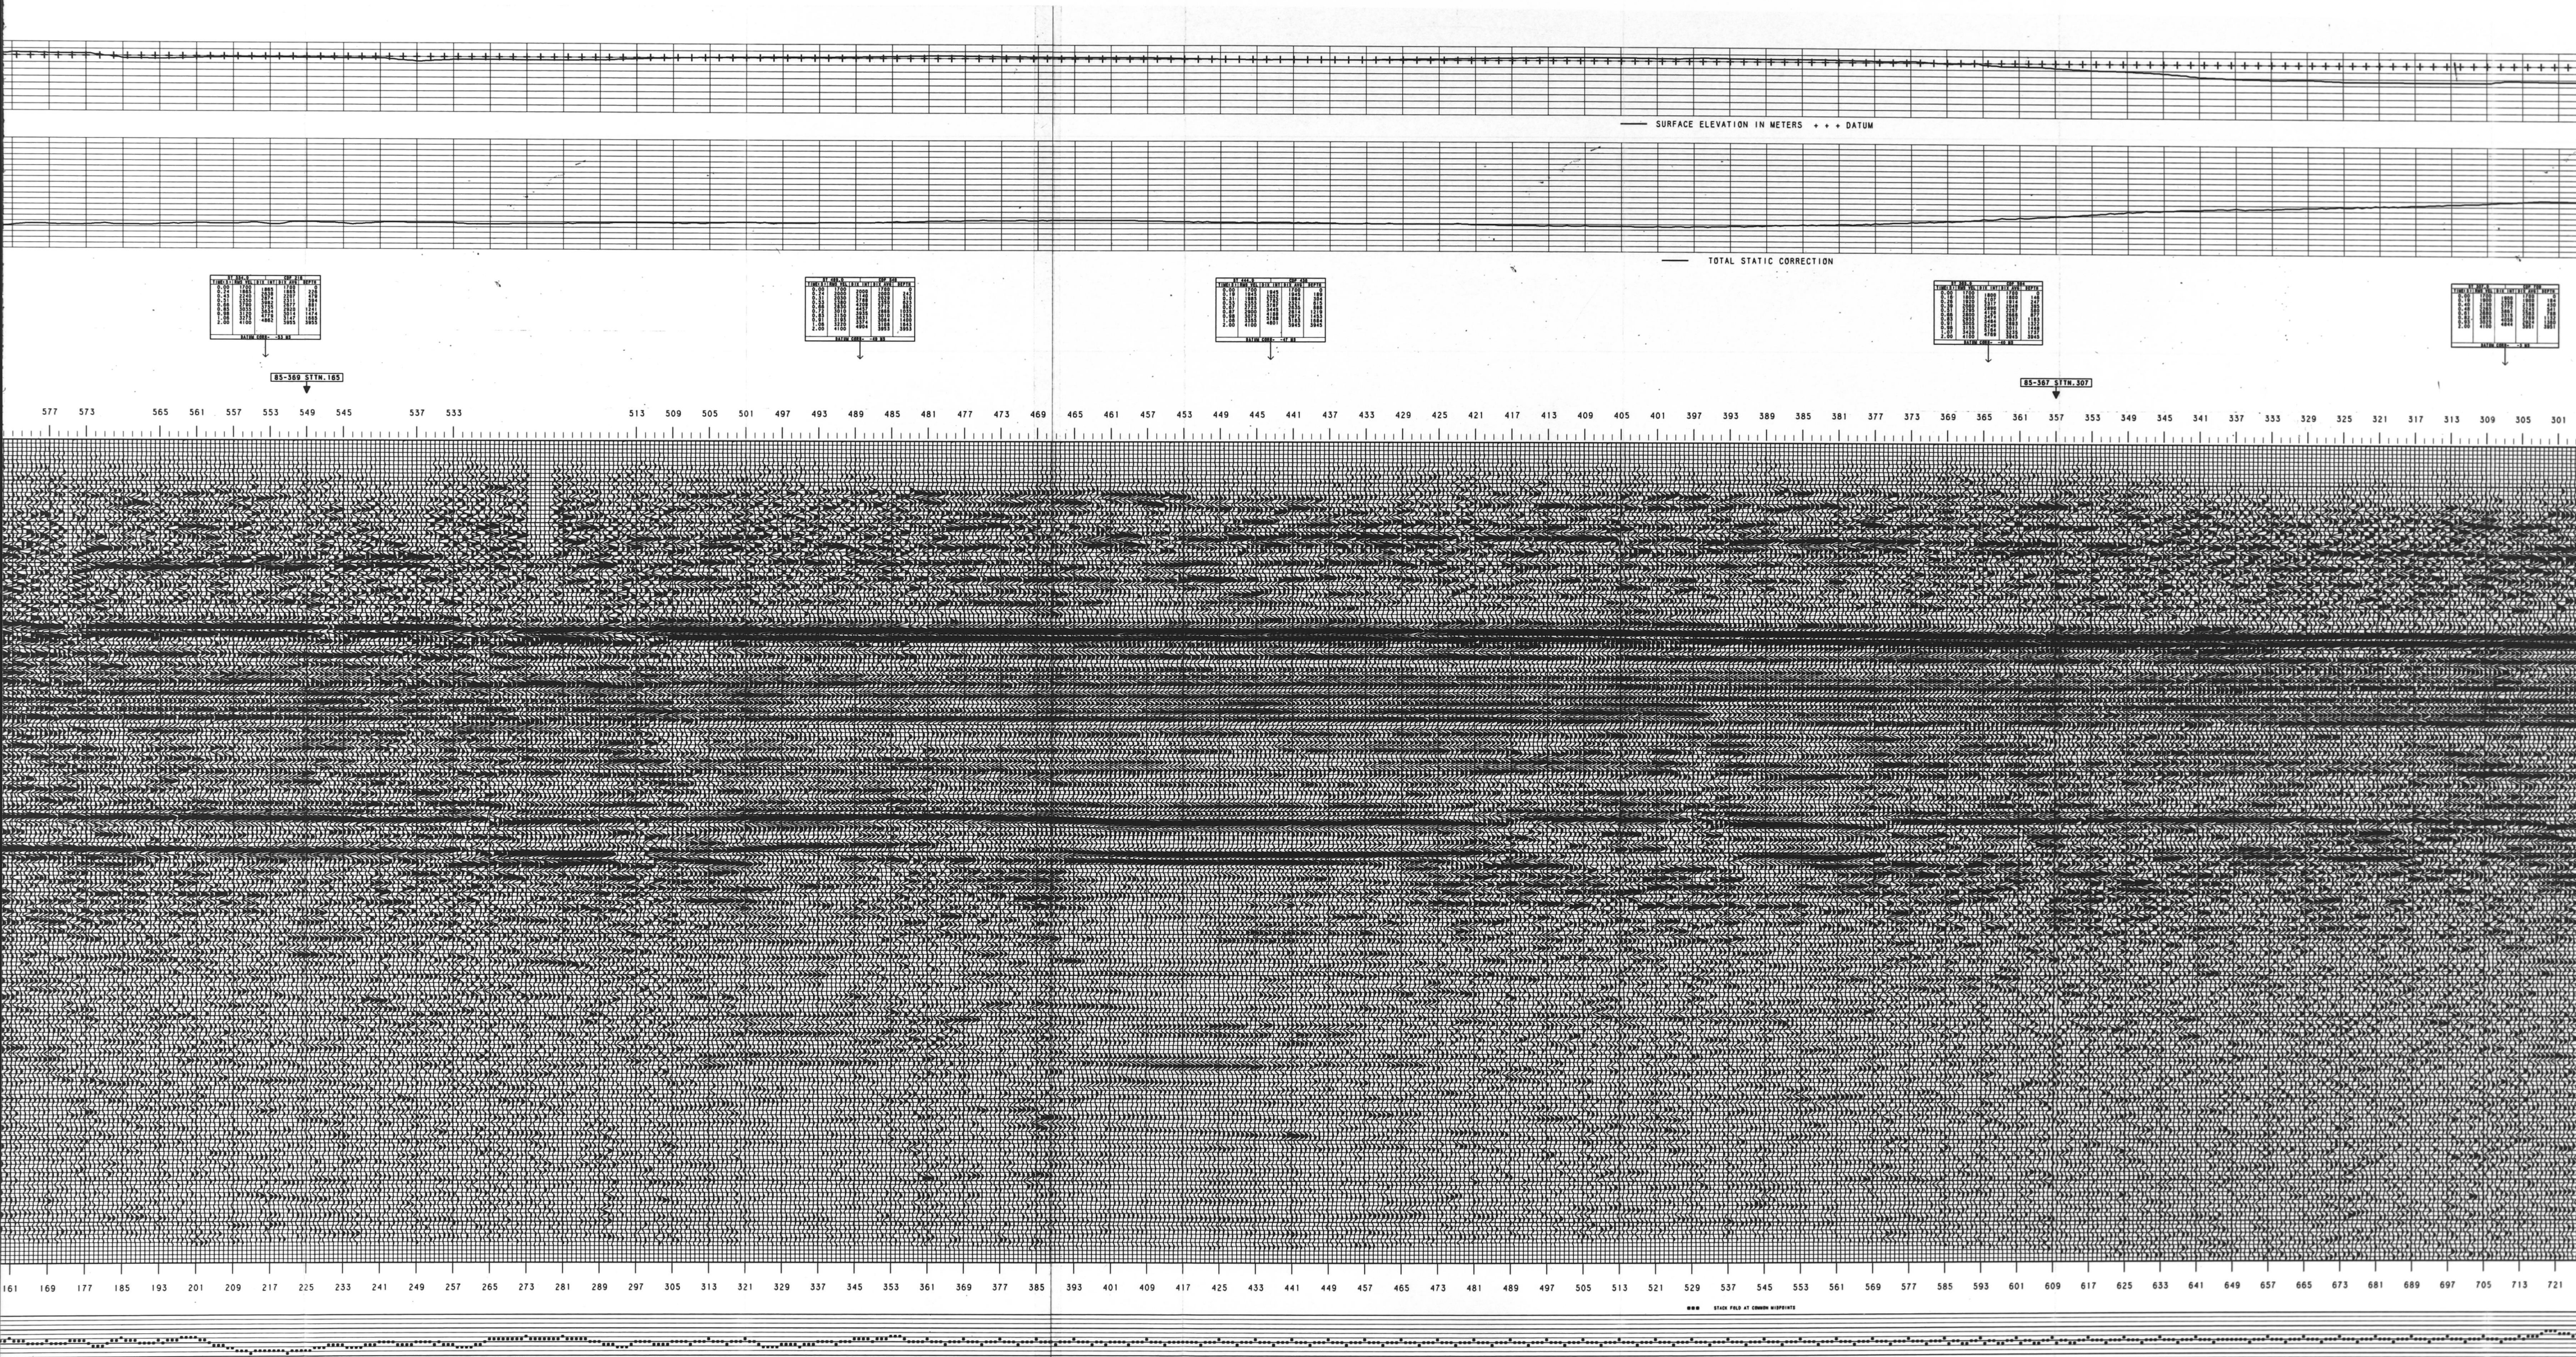



2060 Wabash Rd.
Ottawa, Ont.
Canada K1G 3P5
Tel: (613) 731-9571
Telex: 053 3502
Cable: TERA

PROJ. NO.

9 2 2 9 - C 2 0 - 1 E

LINE NO.

8 5 - 3 7 0

PART NO.

3 OF 3

R.R. 8X

