



2080 Valley Rd.
Calgary, Alberta T2C 1K5
Tel. (403) 242-1571
Telex 055 3552
Cable: TERRA

PROJ. NO. 9 2 2 9 - C 2 0 - 1 E

LINE NO. 8 5 - 3 7 0

PART NO. 1 OF 3
R.R. 8X

9229 - C20 - 1E

'EAST'

LINE: 85-370 144-14

WESTERN GEOPHYSICAL LTD.
CALGARY, ALBERTA
PROCESSING DATE: APRIL 1986
PROCESSED FOR: CANADIAN SUPERIOR OIL LTD.

AREA : CAMERON HILLS
LINE : 85-370
S.P. : 661 - 121
DIR. : WEST - EAST
NTS GRID : 84 N-13/14
LOCATION : T126 R18-21 W5M+NWT
POLARITY : REVERSE
AFE : G3 - 634
DATUM ELEV. : 750 M
REF. VEL. : 2250 M/S

STRUCTURAL STACK

FIELD PARAMETERS

SHOT FOR: CANADIAN SUPERIOR OIL LTD.
SHOT BY: SONIX EXPLORATION LTD.
DATE: MARCH 1986

SPREAD
SHOOTING DIRECTION: W - E
FOLD: 1500Y
STATION INT.: 10 M
SHOT PT. INT.: 72 M
SPREAD: (TR) 1 60 61 120
DIST: (M) 1152 -- 90 X 90 --- 1152

RECEIVER
MAKE/MODEL/TYPER: OYO / 14HZ
NUMBER PER GROUP: 9
SPACING: 2.25M
ARRAY: INLINE

SOURCE
TYPE: VIBROSEIS
VIBRATOR MODEL: LRS-315
NUMBER OF SOURCES: 3
DRAG LENGTH: 7 MOVES OF 5.14 M
SWEEP FREQUENCY: VARI-SWEEP (8 SWEEPS)
1. 15 - 75 HZ
2. 20 - 80 HZ
3. 25 - 85 HZ
4. 27 - 87 HZ
5. 30 - 90 HZ
6. 33 - 93 HZ
7. 35 - 95 HZ
8. 40 - 100 HZ
SWEEP LENGTH: 12 SEC


INSTRUMENTS
MAKE/MODEL: FT1 - DFS-V
RECORD LENGTH: 2 SEC
SAMPLE RATE: 2 MS
FILTER: 8 - 128 HZ
NOTCH: OUT
TAPE FORMAT: SEG 8
TAPE DENSITY: 1600 BPI


PROCESSED BY: WESTERN GEOPHYSICAL DIVISION OF LITTON INDUSTRIES

PROCESSING PARAMETERS

- DEMULPLEX
OUTPUT SAMPLE RATE: 2 MS
OUTPUT DATA LENGTH: 2 SECONDS
- GEOMETRY
LINE, PATTERN, SOURCE, ELEVATION STATIC
- AMPLITUDE RECOVERY
TYPE: SPHERICAL DIVERGENCE
- DEPHASING
SCALING: 14 HZ 602 DAMPING
- DECONVOLUTION
TYPE: PREDICTIVE
PREDICTION DISTANCE: 12 MS
OPERATOR LENGTH: 60 MS
PREWHITENING: 0.12
APPLICATION WINDOW: 0 - 2000 MS
DESIGN WINDOW (NEAR OFFSET): 90 M 200 - 1200 MS
DESIGN WINDOW (FAR OFFSET): 1152 M 600 - 1200 MS
- CDP GATHERS
- STATICS
INTERACTIVE REFRACTION ANALYSIS
DRIFT AND WEATHERING CORRECTIONS
- VELOCITY ANALYSIS (VELAN)
REFERENCED TO SURFACE
- NORMAL MOVEOUT APPLICATION
REFERENCED TO SURFACE
- AUTOMATIC SURFACE CONSISTENT STATICS (MISER)
WINDOW: 350 - 1100 MS
MAXIMUM SHIFT: +/- 24 MS
NO. OF ITERATIONS: 3
- RE-ITERATION OF 8 AND 9
- REFLECTION STRENGTH GAIN
STANDARD AFTER GAIN: 1.75
- TRACE MUTE
OFFSET (M): 230 310 900 1160
TIME (MS): 0 300 900 1000
- CDP STACKING
STACKING FOLD: 1500 X
- AUTOMATIC TRIM STATICS (C.D.P.)
WINDOW: 350 - 1100 MS
MAXIMUM SHIFT: +/- 12MS
MODEL TRACES: 5 TRACES
- FILTER APPLICATION
TYPE: BANDPASS
PASSBAND: 18/18 - 60/36 APPLICATION: 0 - 2000 MS
- GAIN (RMS)
LENGTH OF FIRST GAIN ZONE: 400 MS
LENGTH OF LONGEST GAIN ZONE: 400 MS
LONG RMS AMPLITUDE
- DISPLAY SCALE
HORIZONTAL SCALE: 12 TRACES/INCH
VERTICAL SCALE: 7.5 INCHES/SEC
GEOSPACE PLOTTING GAIN: 1100
1 INCH = 210 METERS

D.C. GEOPHYSICIST: R.E. DIMENT

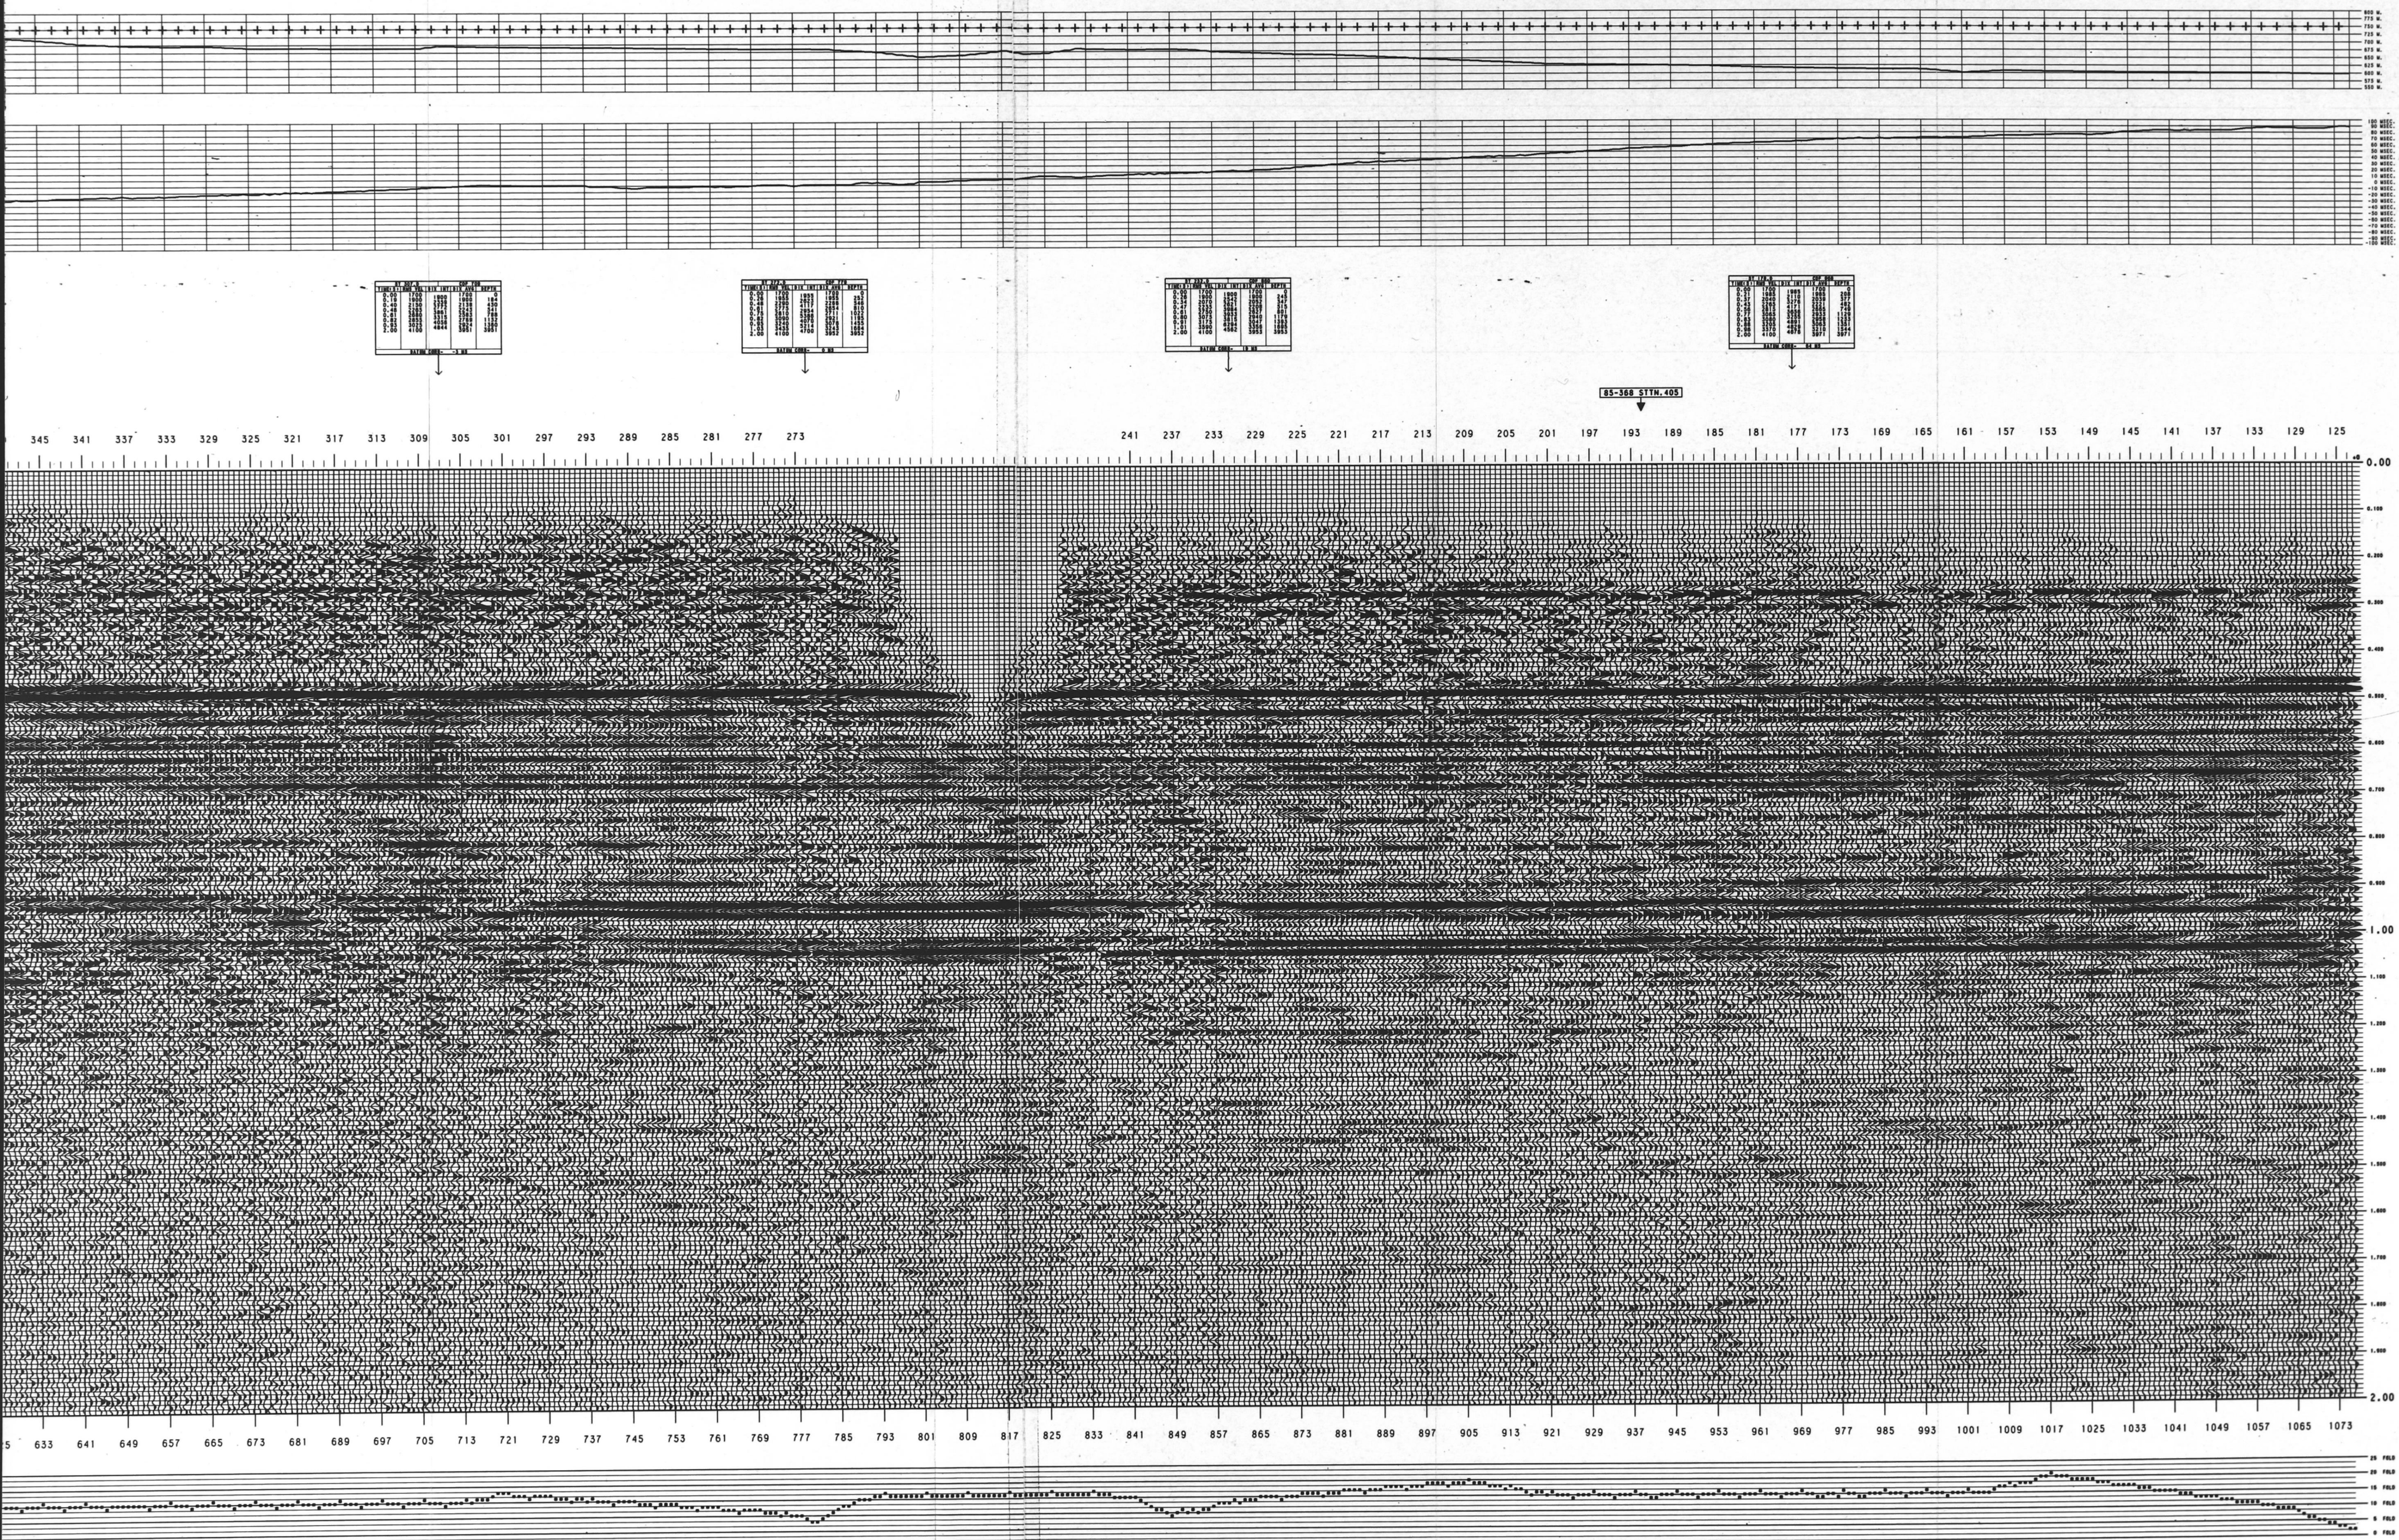

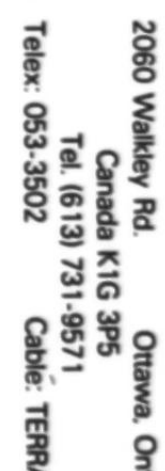

PROJ. NO.

9229-620-1E

LINE NO. 85-370

PART NO. 3 OF 3

R.R. 8X

