

303

273

243


213

183

153

124

STN.

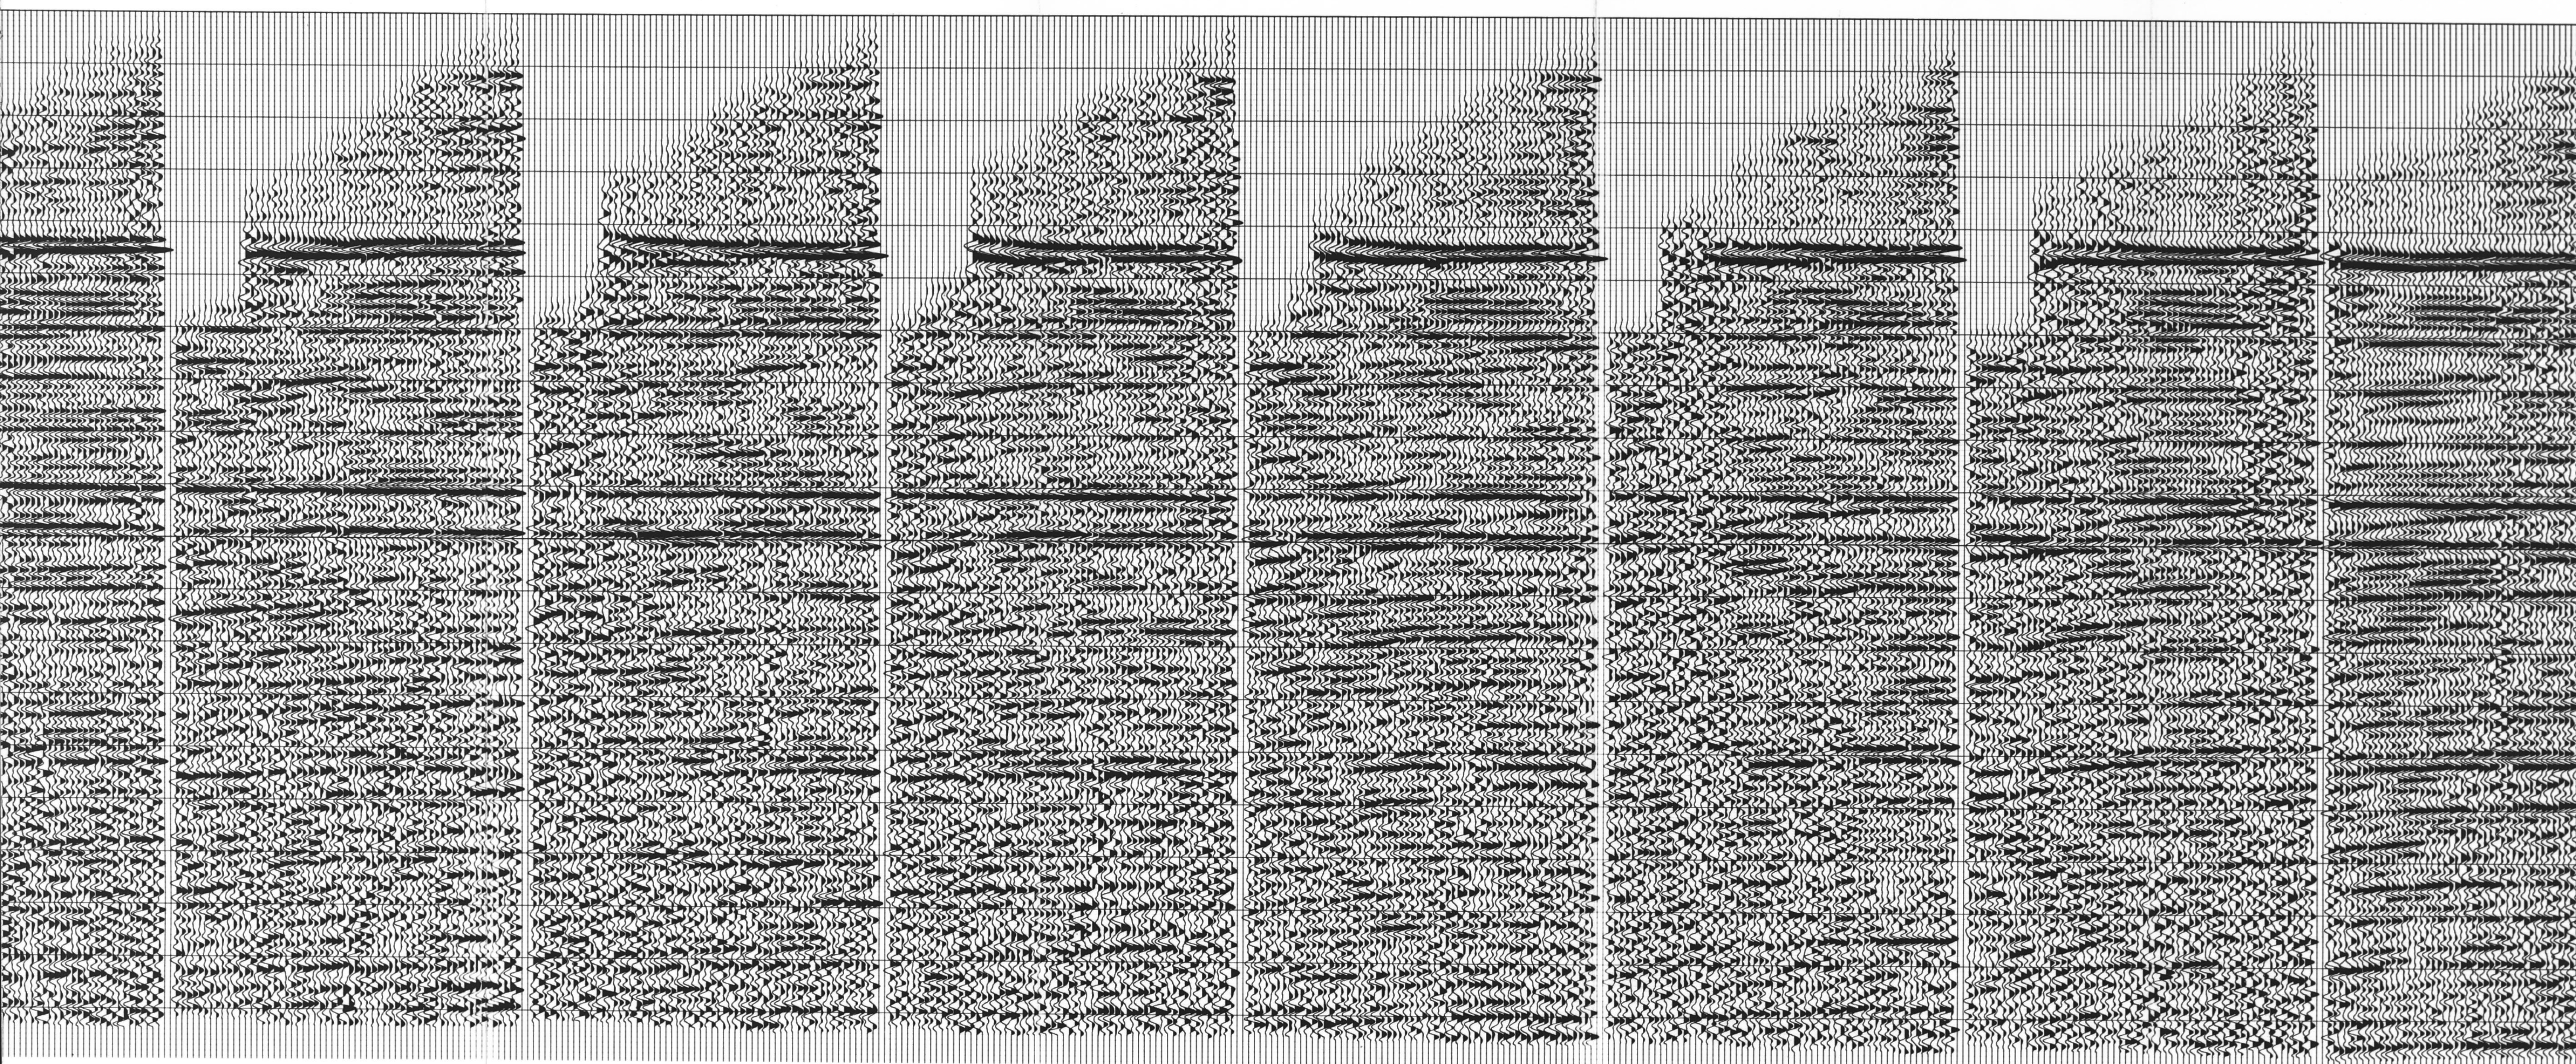

LINE: 85-371

WESTERN GEOPHYSICAL LTD.
CALGARY ALBERTA
PROCESSING DATE: APRIL 1986
PROCESSED FOR: CANADIAN SUPERIOR OIL LTD.

AREA : CAMERON HILLS
LINE : 85-371
S.P. : 101 - 477
DIR. : NORTH - SOUTH
NTS GRID : 84 N-13/14
NTS GRID : 85 C-3/4
LOCATION : T126 R18-21 WSM+NWT
POLARITY : NORMAL
AFE : G3 - 634
DATUM ELEV. : 750 M
REF. VEL. : 2250 M/S

COMMON OFFSET STACK

FIELD PARAMETERS

SHOT FOR: CANADIAN SUPERIOR OIL LTD.
SHOT BY: SONIX EXPLORATION LTD.
DATE: MARCH 1986

SPREAD
SHOOTING DIRECTION N - S
FOLD 1500Z
STATION INT. 18 M
SHOT PT. INT. 72 M
SPREAD: (TR) 1 60 61 120
DIST: (M) 1152 -- 90 X 90 --- 1152

RECEIVER
MAKE/MODEL/TYPE OYO / 14HZ
NUMBER PER GROUP 9
SPACING 2.25M
ARRAY INLINE

SOURCE
TYPE VIBROSEIS
VIBRATOR MODEL LRS-315
NUMBER OF SOURCES 5
DRAG LENGTH 7 MOVES OF 5.14 M
SWEEP FREQUENCY VARI-SWEEP (8 SWEEPS)
1. 15 - 75 HZ
2. 20 - 80 HZ
3. 25 - 85 HZ
4. 27 - 87 HZ
5. 30 - 90 HZ
6. 33 - 93 HZ
7. 35 - 95 HZ
8. 40 - 100 HZ
SWEEP LENGTH 12 SEC

INSTRUMENTS
MAKE/MODEL FTI - DFS-V
RECORD LENGTH 2 SEC
SAMPLE RATE 2 MS
FILTER 8 - 128 HZ
NOTCH OUT
TAPE FORMAT SEG 8
TAPE DENSITY 1600 BPI

PROCESSED BY WESTERN GEOPHYSICAL DIVISION OF LITTON INDUSTRIES

PROCESSING PARAMETERS

- DEMUTIPLEX
OUTPUT SAMPLE RATE: 2 MS
OUTPUT DATA LENGTH: 2 SECONDS
- GEOMETRY
LINE, PATTERN, SOURCE, ELEVATION STATIC
- AMPLITUDE RECOVERY
TYPE: SPHERICAL DIVERGENCE
- DEPHASING
GEOPHON: 14 HZ 60Z DAMPING
- DECONVOLUTION
TYPE: PREDICTIVE
PREDICTION DISTANCE: 12 MS
OPERATOR LENGTH: 60 MS
PREWHITENING: 0.12
APPLICATION WINDOW: 0 - 2000 MS
DESIGN WINDOW (NEAR OFFSET-90 M): 200 - 1200 MS
DESIGN WINDOW (FAR OFFSET-1152 M): 800 - 1200 MS
- CDP GATHERS
- STATICS
INTERACTIVE REFRACTION ANALYSIS
DRIFT AND WEATHERING CORRECTIONS
- VELOCITY ANALYSIS (VELAN®)
REFERENCED TO SURFACE
- NORMAL MOVEOUT APPLICATION
REFERENCED TO SURFACE
- AUTOMATIC SURFACE CONSISTENT STATICS (MISER®)
WINDOW: 350 - 1100 MS
NO. OF ITERATIONS: +/- 24 MS
- RE-ITERATION OF 8 AND 9
- REFLECTION STRENGTH GAIN
STANDOUT AFTER GAIN: 1.75
- AUTOMATIC TRIM STATICS (C.D.P.)
WINDOW: 350 - 1100 MS
MAXIMUM SHIFT: +/- 12MS
MODEL TRACES: 5 TRACES
- COMMON OFFSET STACK
- FILTER APPLICATION
TYPE: BANDPASS
PASSBAND: 18/18 - 60/36
DOMAIN: FREQUENCY
APPLICATION: 0 - 2000 MS
- GAIN (RMS)
LENGTH OF FIRST GAIN ZONE: 400 MS
LENGTH OF LONGEST GAIN ZONE: 400 MS
2000 RMS AMPLITUDE
- DISPLAY SCALE
HORIZONTAL SCALE: 12 TRACES
VERTICAL SCALE: 7.5 INCHES/SEC
GEOSPAC PLOTTING GAIN: 1100000 24 1986
1 INCH = 216 METERS

O.C. GEOPHYSICIST: R.E. DIMENT



2080 Wexley Rd.
Calgary, Alberta T2C 3P5
Tel (403) 271-9571
Telex 053-3502
Cable: WEXLEY

PROJ. NO. 9 2 2 9 - C 2 0 - 1 E

LINE NO. 8 5 - 3 7 1

PART NO. 1 OF 2

R.R. 8X

PROJ. NO.

9 2 2 9 - C 2 0 - 1 E

LINE NO.

8 5 - 3 7 1

PART NO.

2 OF 2

R.R. 8X



213

243

273

303

333

363

393

423

453

