


TIME V-RMS V-INT
100 4682 4682
200 4682 4682
300 4682 4682
400 4682 4682
500 4682 4682
600 4682 4682
700 4682 4682
800 4682 4682
900 4682 4682
1000 4682 4682

TIME V-RMS V-INT
100 4682 4682
200 4682 4682
300 4682 4682
400 4682 4682
500 4682 4682
600 4682 4682
700 4682 4682
800 4682 4682
900 4682 4682
1000 4682 4682

TIME V-RMS V-INT
100 4682 4682
200 4682 4682
300 4682 4682
400 4682 4682
500 4682 4682
600 4682 4682
700 4682 4682
800 4682 4682
900 4682 4682
1000 4682 4682

TIME V-RMS V-INT
100 4682 4682
200 4682 4682
300 4682 4682
400 4682 4682
500 4682 4682
600 4682 4682
700 4682 4682
800 4682 4682
900 4682 4682
1000 4682 4682

TIME V-RMS V-INT
100 4682 4682
200 4682 4682
300 4682 4682
400 4682 4682
500 4682 4682
600 4682 4682
700 4682 4682
800 4682 4682
900 4682 4682
1000 4682 4682

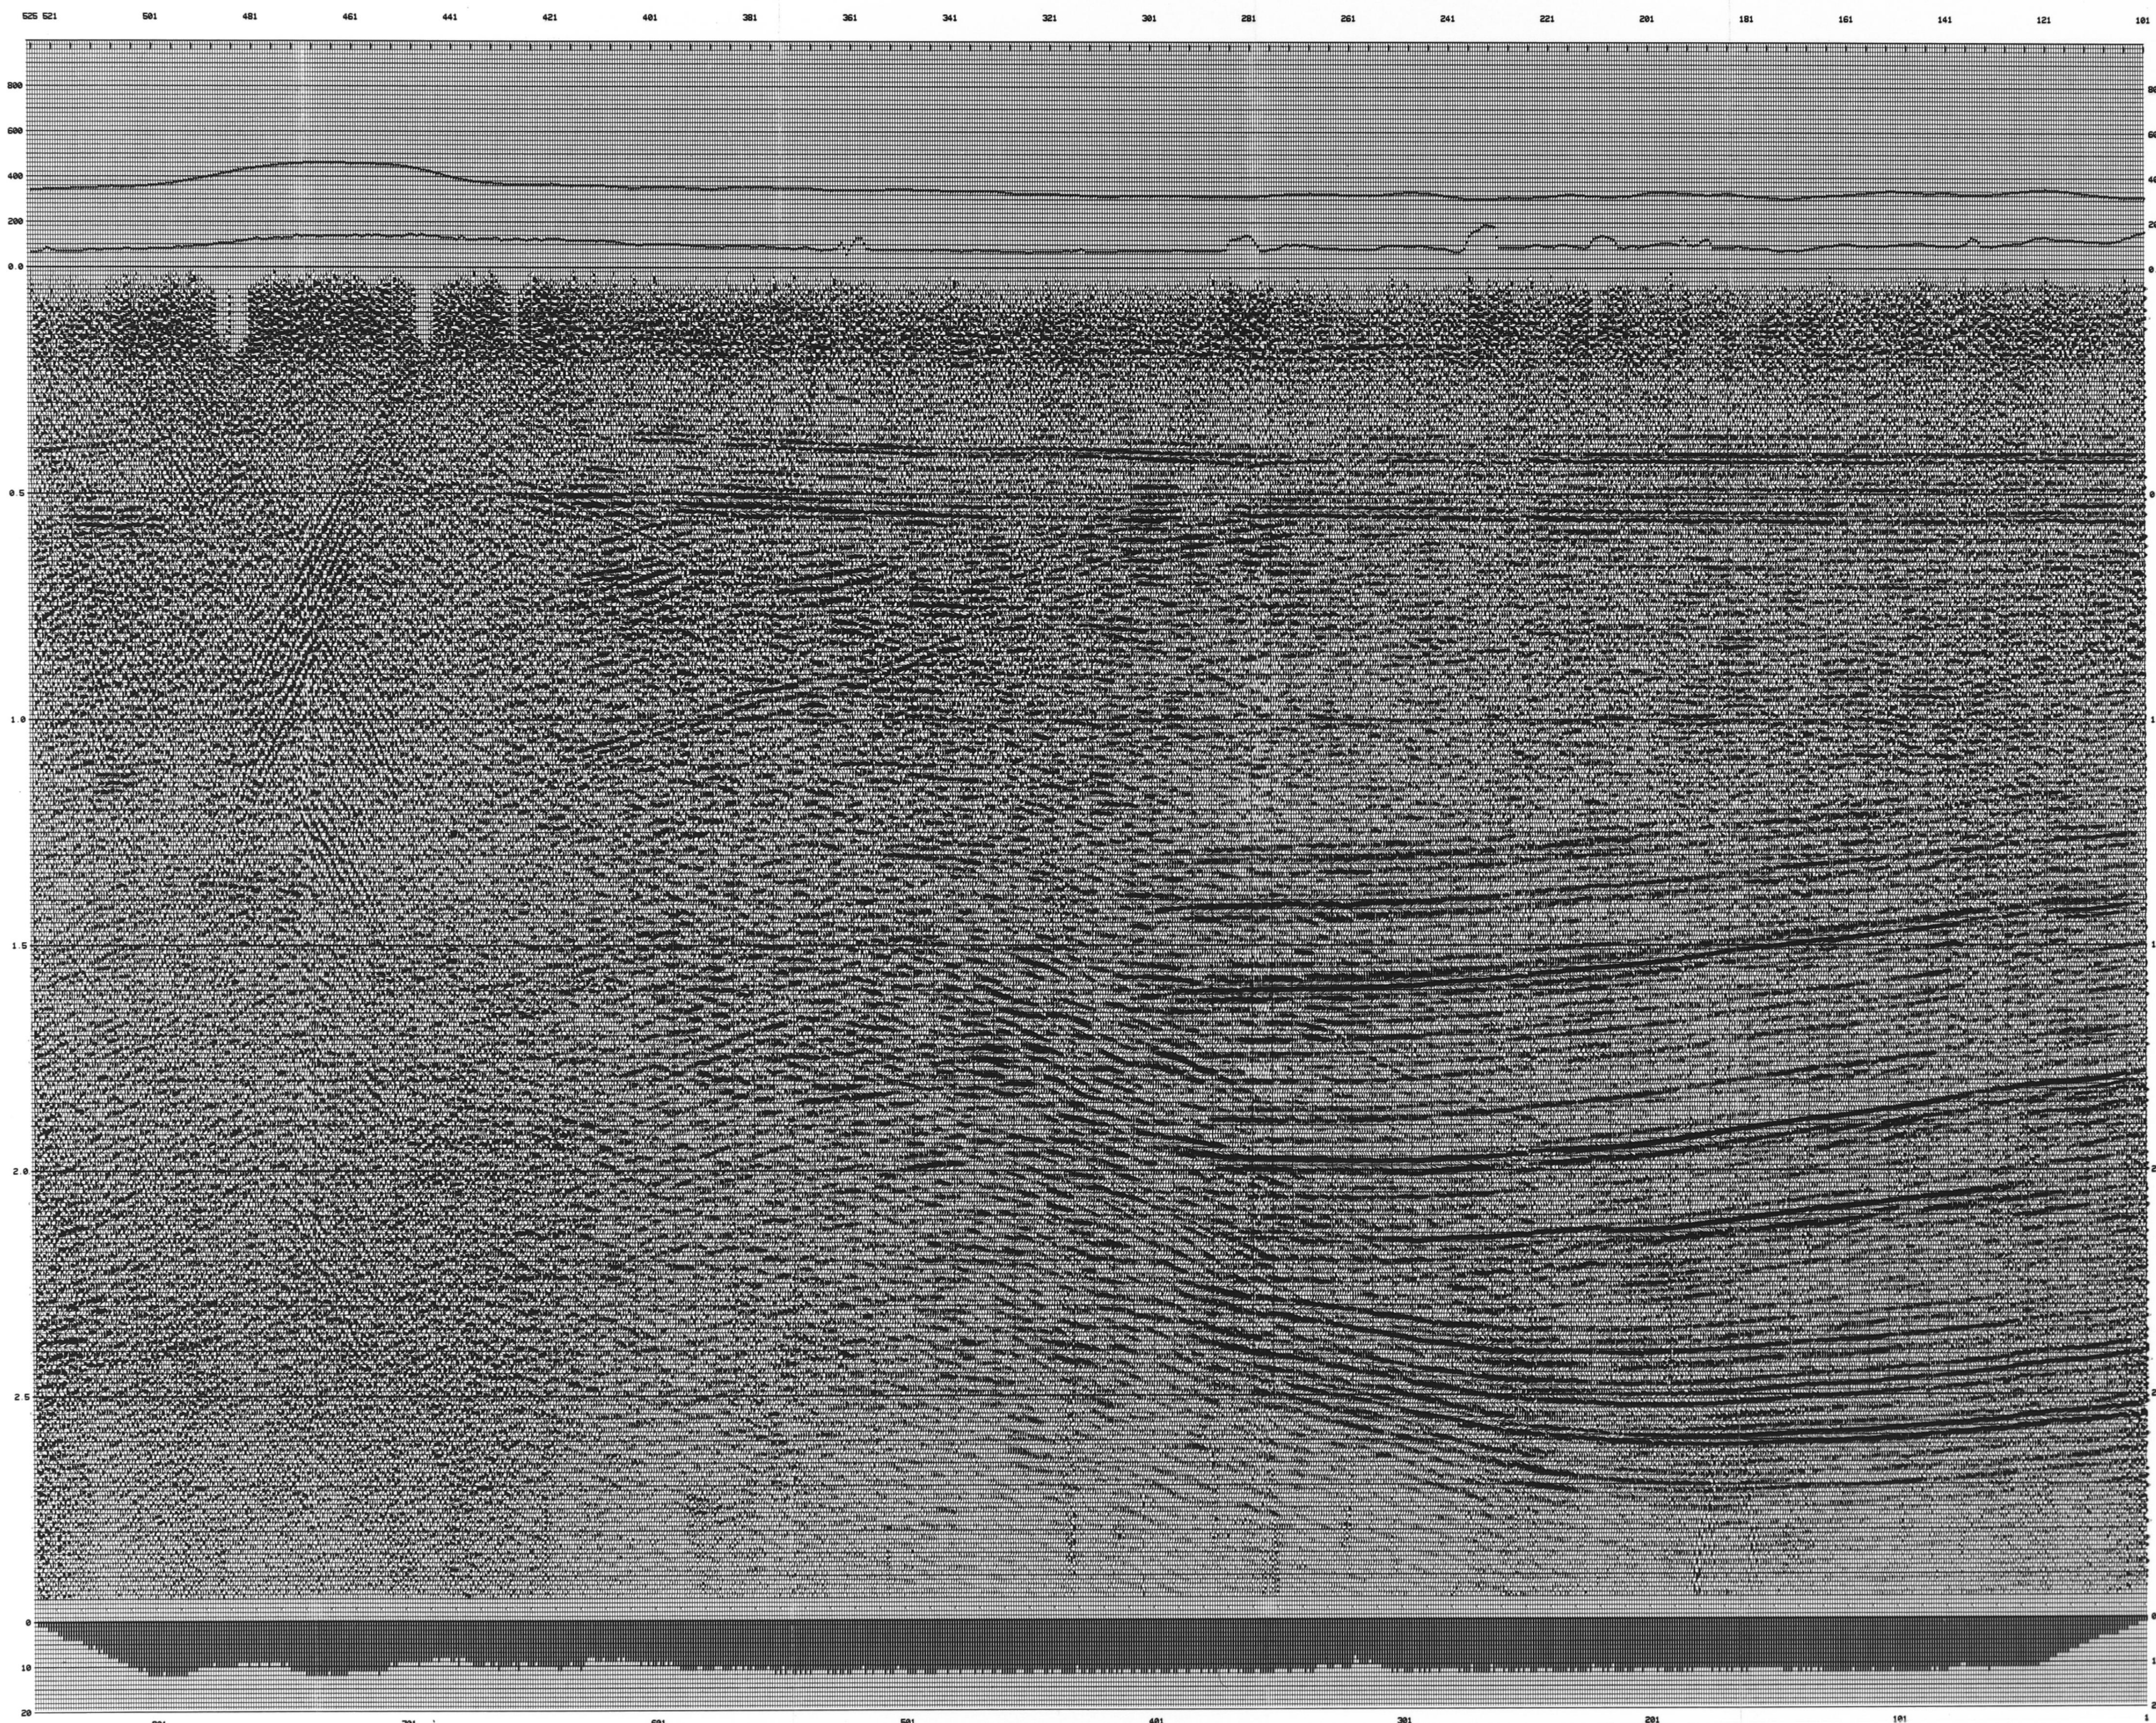

FORWARD RESOURCES LTD.

PROCESSING MONITORED BY
PETREL CONSULTANTS LTD.

LINE: FR-38
PROJECT: TEDJI LAKE
LOCATION: N.W.T. 67 N 126 E

NE

STRUCTURE

POLARITY ☒ NP ☐ RP
FIRST KICK POLARITY ABOVE FOLD BARS, PEAKS ARE POSITIVE NUMBERS

ACQUISITION PARAMETERS

SHOT BY: PACER GEOPHYSICAL LTD. PTY. 100
DATE: JAN. 1984
SPREAD: 1832 - 34 X 34 - 1832
SOURCE INTERVAL: 1368
RECEIVED INTERVAL: 240
SOURCE: DYNAMITE: 1 X 2KG. 4 10M
RECEIVERS: MARK L-201 14M.L. 9 OVER 33.5M
INSTRUMENTS: MD-10, 96 TRACE
CASE MODE: OFF
SAFE FORMAT: SEC B
FIELD FILTERS: 8-125HZ

PROCESSING PARAMETERS

PROCESSED BY GEO-X
DATE: FEB. 1984
DIGITAL CONVERSION
AMPLITUDE RECOVERY (ATIEP18T)
DECONVOLUTION TYPE: SPARKING, TIME VARIANT
OPERATOR LENGTH: 40 MS.
PREHIGHLIGHTING: 5 L
GATE: 200-800 MS. AT 0 OFFSET
GATE: 800-1000 MS. AT 1832 H. OFFSET
GATE: 1000-1500 MS. AT 0 OFFSET
GATE: 1500-2000 MS. AT 1832 H. OFFSET
GATE: 2000-2700 MS. AT 0 OFFSET
GATE: 2700-3000 MS. AT 1832 H. OFFSET
STRUCTURAL CORRECTIONS DATUM ELEVATION: 303 M
DATUM VELOCITY: 5500 M/SEC.
PROCESSING DATUM: 0 M
ELEVATION, WEATHERING, AND DRIFT
ANALYSIS PRELIMINARY VELOCITIES AND STATICS
STATICS SURFACE STACK RESIDUAL
TRACE WILLS
VELOCITY ANALYSIS
FINAL MOVEOUT
NEAR SCALING 400-1800 MS. 1100-2400 MS.
MUTE DISTANCE(M) 307 1123 1832
TIME(MS) 130 400-800 700
STATICS SURFACE CONSISTENT RESIDUAL
WINDOW: 800-2000 MS.
TRACE GATHER FOLD: 12
STATICS COP CROSS CORRELATION
STACK
FILTER 18/25 - 65/100
EQUALIZATION MEAN WINDOW 250-2700 MS.