


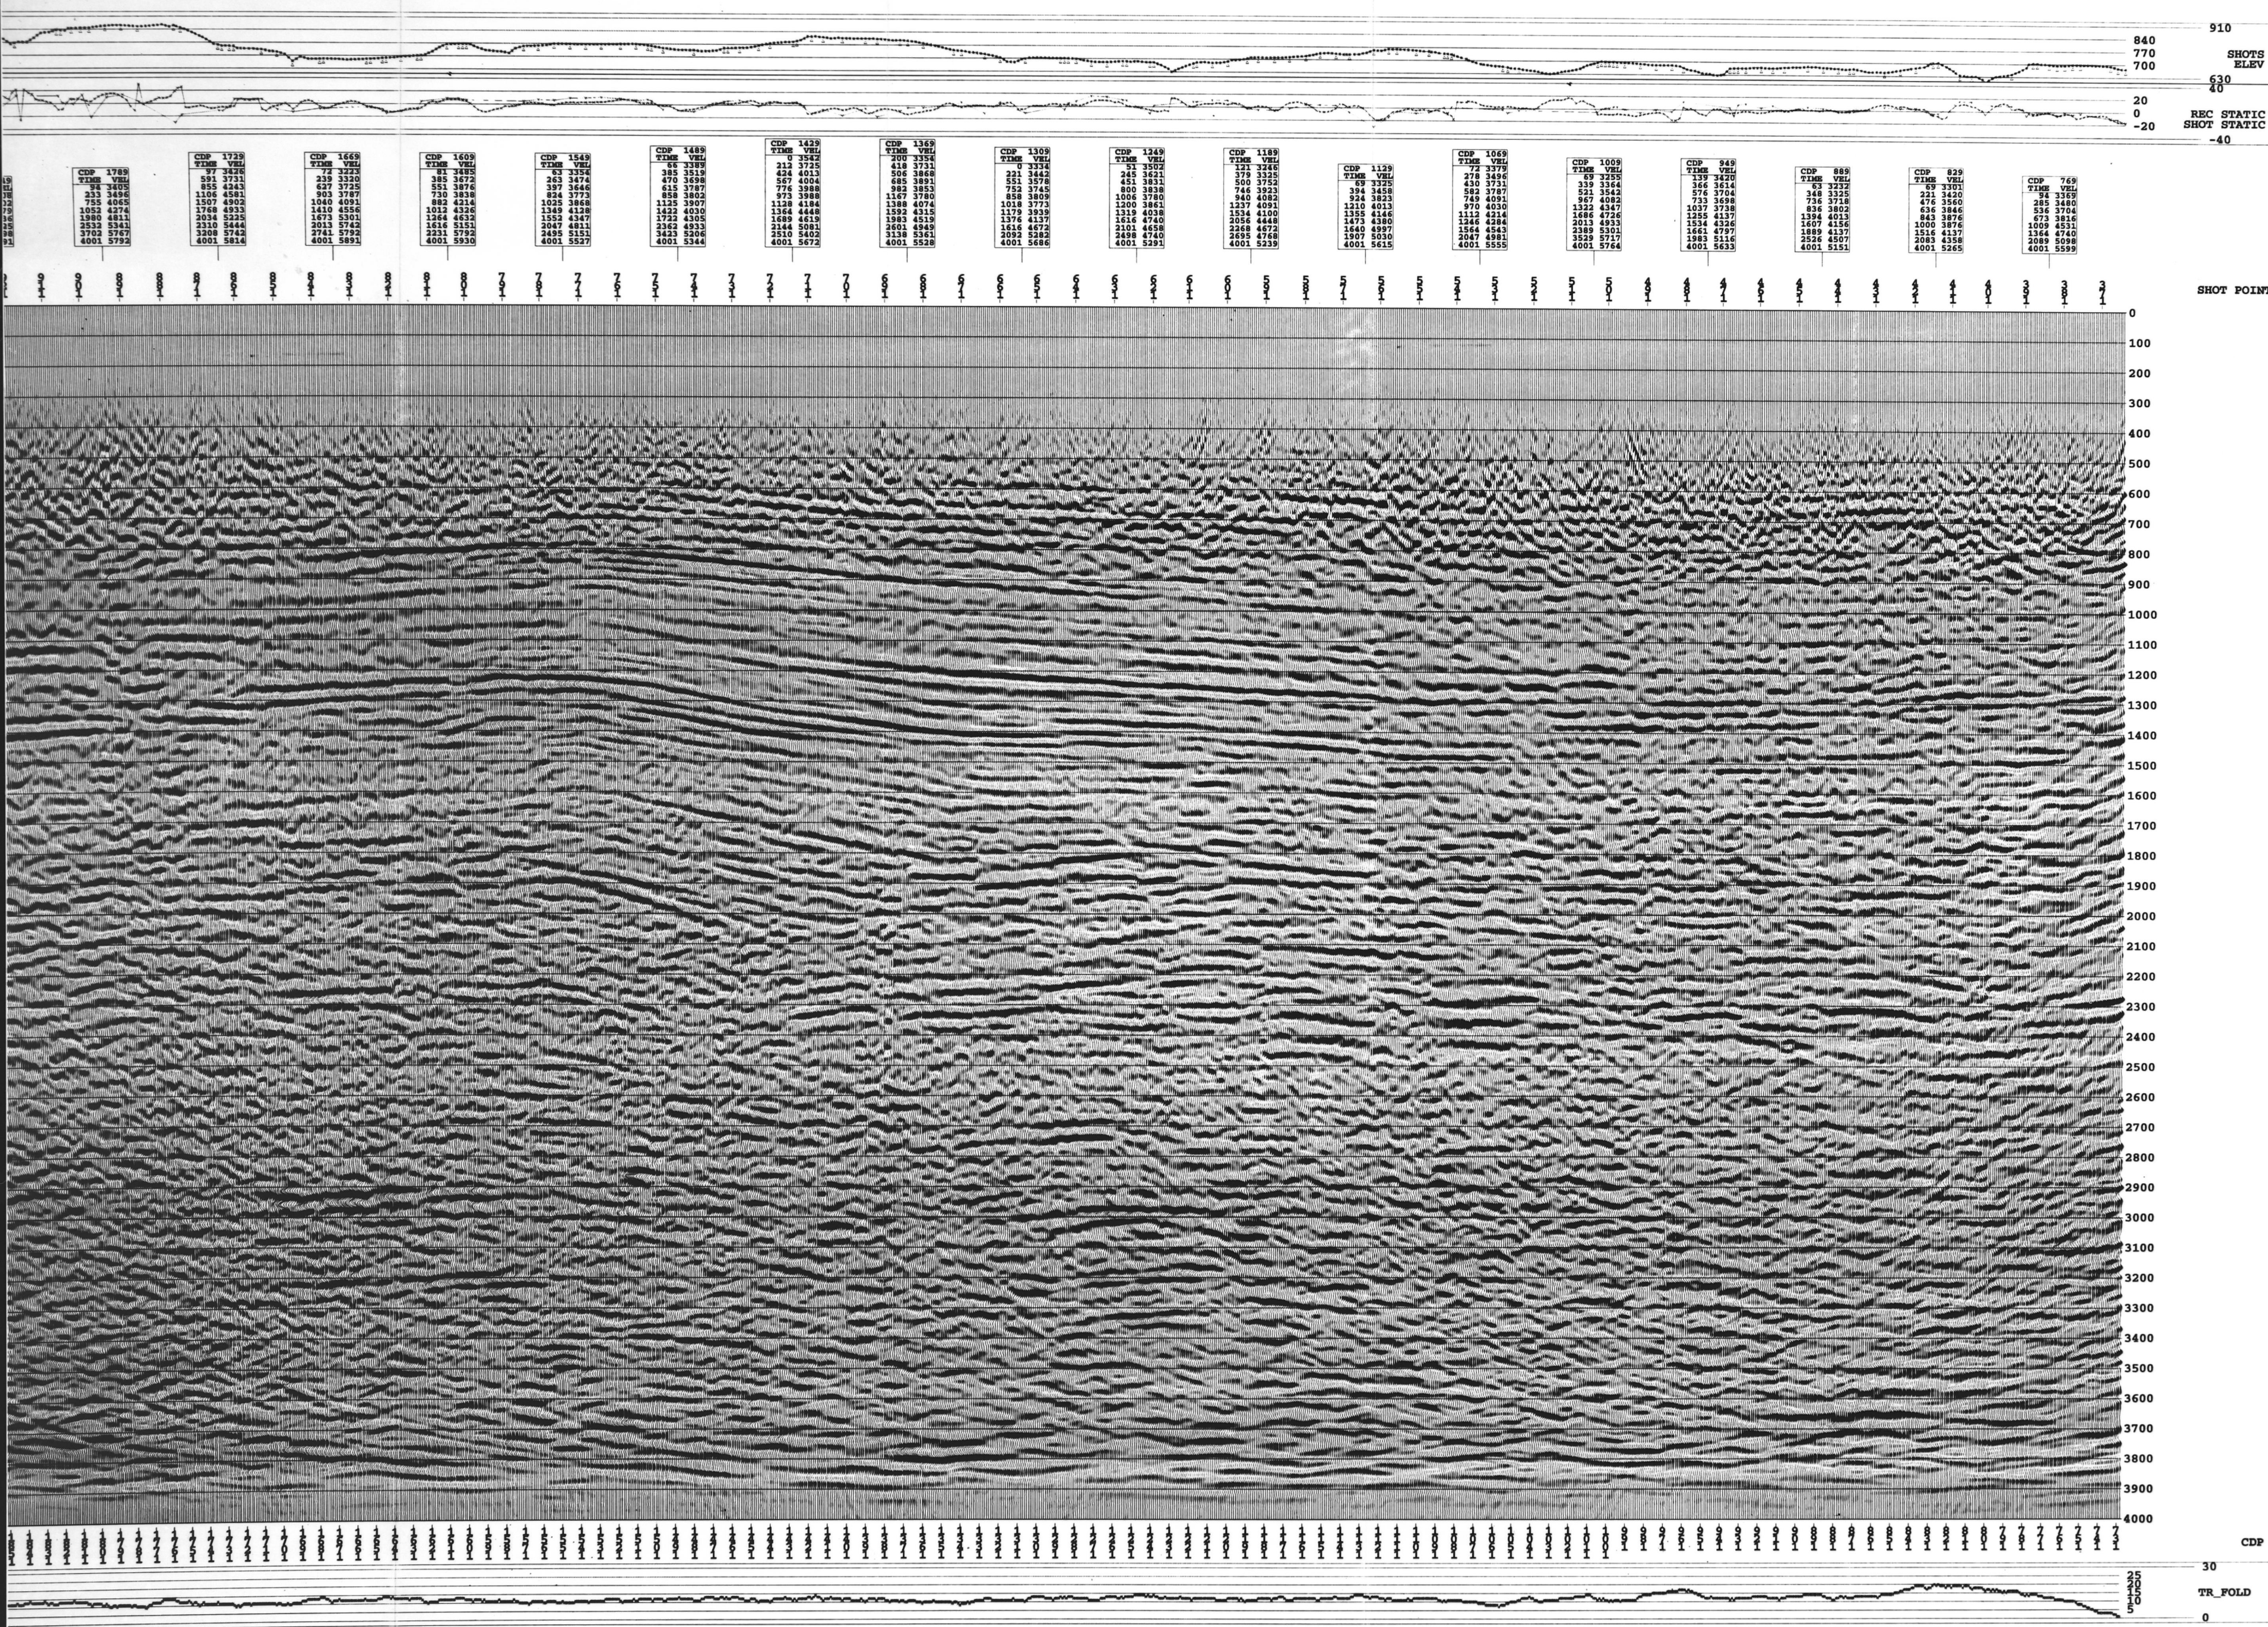

Resolution
Seismic Imaging

**KOTANEELEE
KOT-7S (44900)**
Processed for
NORCEN ENERGY
Migrated Stack
Normal Polarity
SP 1061 SP 365

FIELD PARAMETERS

ACQUISITION
Project: Kottaneelee
Date Shot: 25 SEP 83
Shot By: Seifel Geophysical Ltd.
Shot For: Norcen Energy
Party number: 521
SOURCE
Source type: Dynamite
Charge size: 10-20 lb
Charge depth: 8-10m
Source array: Single Hole
Source interval: 100 m
RECEIVERS
Geophone type: Mark L-15 14 Hz
Geophone array: 18 over 50 m
Group interval: 25 m
INSTRUMENTS
Recording system: Sercel 3388
Gain type: 500
Bandwidth: 5 Hz
Sample interval: 2 ms
Number of channels: 48
Lo cut filter: 8 Hz
Hi cut filter: 12 dB/oct
Lo cut slope: 12 dB/oct
Hi cut slope: 24 dB/oct
Band pass filter: 10-15-45-55 Hz
SPREAD
T1: 748 748 748
120m 25m 25m 120m

PROCESSING SEQUENCE

DEMIX:
SBS-B multiplexed format, 2 msec sample interval
GEOCHEMIS:
Green Mountain Geoscribe
GAIN RECOVERY:
Spherical divergence correction,
1/rt+2, trace/trace equalisation
ELEVATION STATISTICS:
Datum elevation 1250 m
Replacement velocity 6000 m/sec
DECONVOLUTION:
Surface consistent Predictive deconvolution
80 msec operator length, 36 ms. Pred Distance
Design gain:
0750 - 3000 msec @ 1650m
FILTERS:
Bandpass Filter, 10-15-45-55 Hz
ITERATE:
REFLECTION STATISTICS:
Maximum power automatic statics
Horizon locked, 10 msec max shift
VEL-TRAC Analysis:
Interactive velocity analysis,
CDP interval = 60
TRIM STATISTICS:
Horizon keyed CDP statics,
max shift 10 msec.
MNO/NOTE/STACK:
All offsets
POST STACK:
Band pass filter, 10-14-45-55
FD Migration = 60% of Velocity
Time Variant Scaling
PLT:
Create cpm plot file.

DISPLAY PARAMETERS

Mod Sep 25 08:32:10 1986
Traces/trace = 12
Size Percent = 0
Gain Set = 0.1
Gain Constant = 257.373
Static Shift = 0
Inches/Second = 7.5
Clip limit = 1
RMS Amplitude = 1.07831

0554-N2-1E

