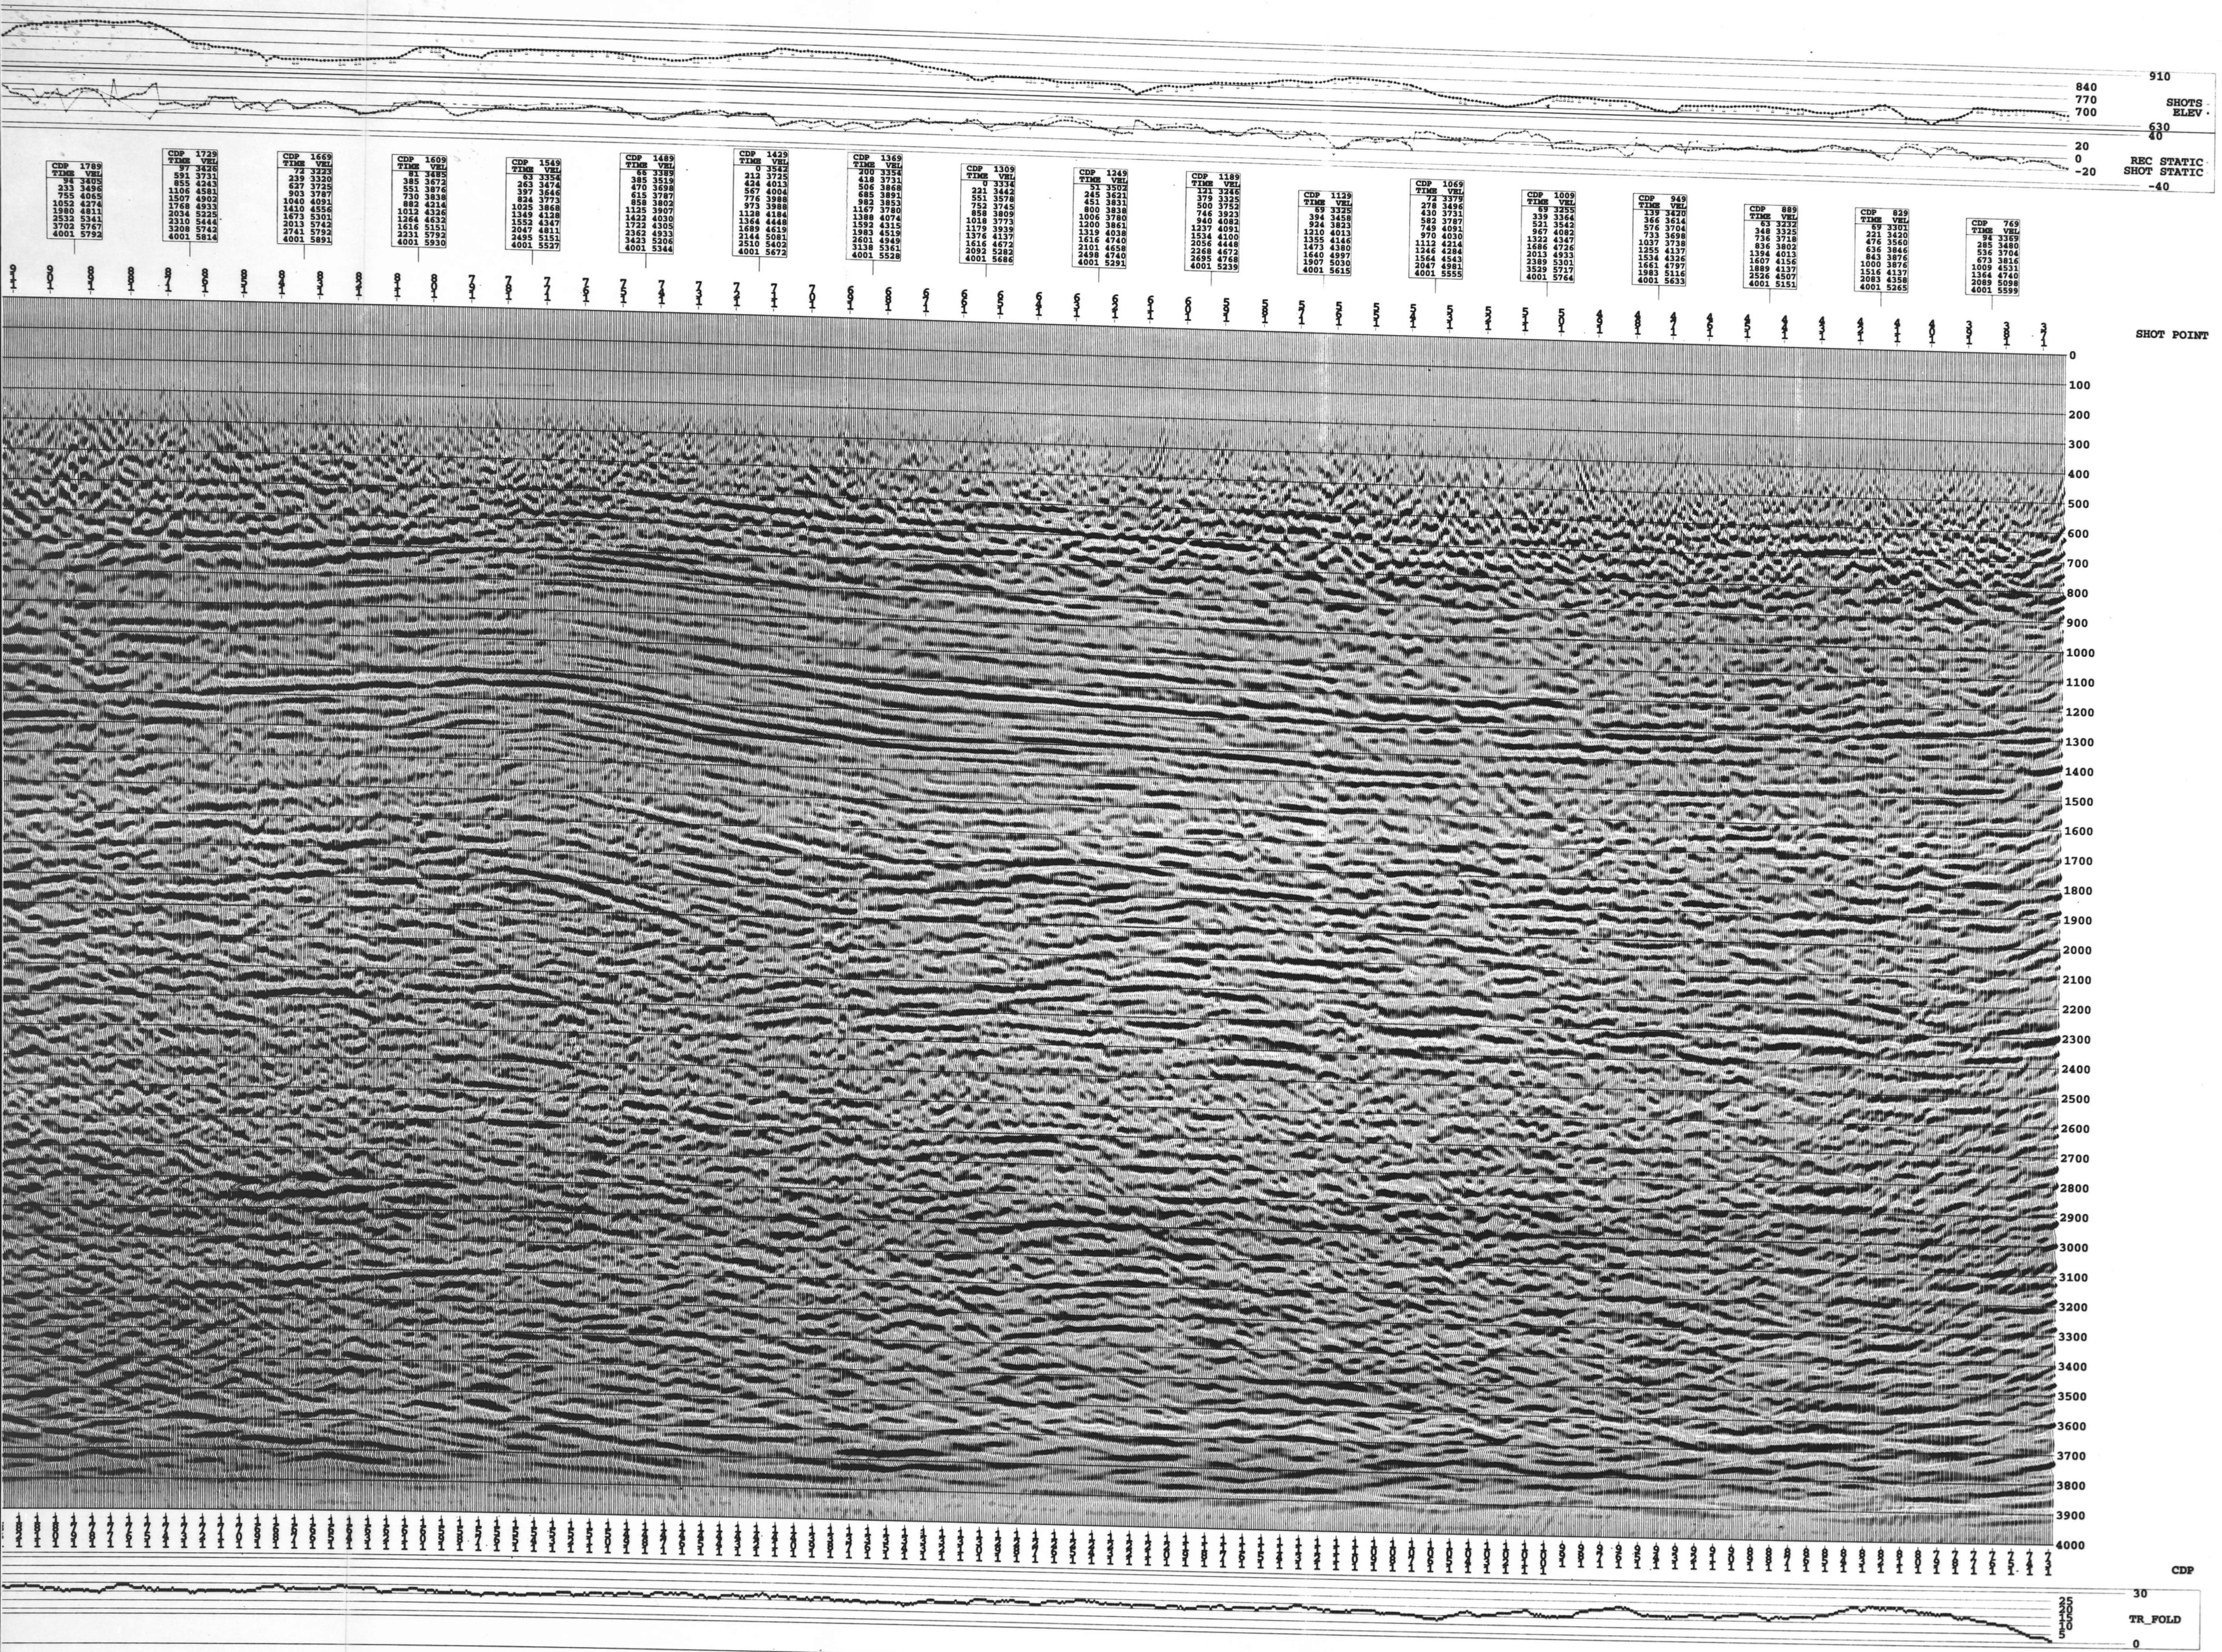

9229-N5-1E

North

Resolution Seismic Imaging

KOTANEELEE KOT-7S (44900)

Processed for
NORCEN ENERGY

Migrated Stack
Reverse Polarity

SP 1061 SP 365

FIELD PARAMETERS

ACQUISITION

Project..............................Kotaneelee
Date shot............................25 SEPT 83
Shot by..............................Sefel Geophysical Ltd.
Shot for.............................Northcor Energy
Party number.........................521

SOURCE

Source type..........................Dynamite
Charge size..........................10-20 lb
Charge depth.........................8-12m
Source array.........................Single Hole
Source interval......................100 m

RECEIVERS

Geophone type........................Mark L-15 14 Hz
Geophone array.......................18 over 50 m
Group interval.......................25 m

INSTRUMENTS

Recording system.....................Sercel 338HR
Recording format.....................SEG B
Gain type............................IFP
Record length........................6 sec
Sample interval......................2 ms
Number of channels...................96
Lo cut filter........................8 Hz
Lo cut slope.........................12 db/oct
Hi cut filter........................125 Hz.
Hi cut slope.........................24 db/oct
Notch filter.........................Out

SPREAD

T1--------------------------T48 . T49--------------------------T96
1200m 25m SP 25m 1200m

PROCESSING SEQUENCE

DEMUX:

SEG-B mulitplexed format, 2 msecs sample interval

GEOMETRIES:

Green Mountain Geoscribe

GAIN RECOVERY:

Spherical divergence correction,
1/t*v**2, trace/trace equalization

ELEVATION STATICS:

Datum elevation 1250 m
Replacement velocity 4000 m/sec

DECONVOLUTION:

Surface consistent Predictive deconvolution
80 msec operator length, 36 ms. Pred Distance
Design gate:
0400 - 3000 msecs @ 25m
0750 - 3000 msecs @ 1650m

FILTER:

Bandpass Filter, 10-15-45-55 hz

ITERATE:

REFLECTION STATICS:
Maximum power automatic statics,
Horizon keyed, 30 msecs max shift
VELOCITY ANALYSIS:
Interactive velocity analysis,
CDP interval < 60

TRIM STATICS:

Horizon keyed CDP statics,
max shift 10 msecs.

NMO/MUTE/STACK:

All offsets

POST STACK:

Band pass filter- 10-14-45-55
FD Migration - 60% of Velocity
Time Variant Scaling

PLOT:

Create cgm+ plot file.

DISPLAY PARAMETERS

Wed Sep 25 08:33:08 1996
Traces/Inches = 12
Bias Percent = 0
Gain Set = 0.5
Gain Constant = 927.373
Static Shift = 0
Inches/Second = 7.5
Clip Limit = 3
RMS Amplitude = 1.07831

TRIATHLON
PROJ. NO. 9229-NS-1E
LINE NO. KOT-7S
PART NO. 1 OF 2
R.R. 8X

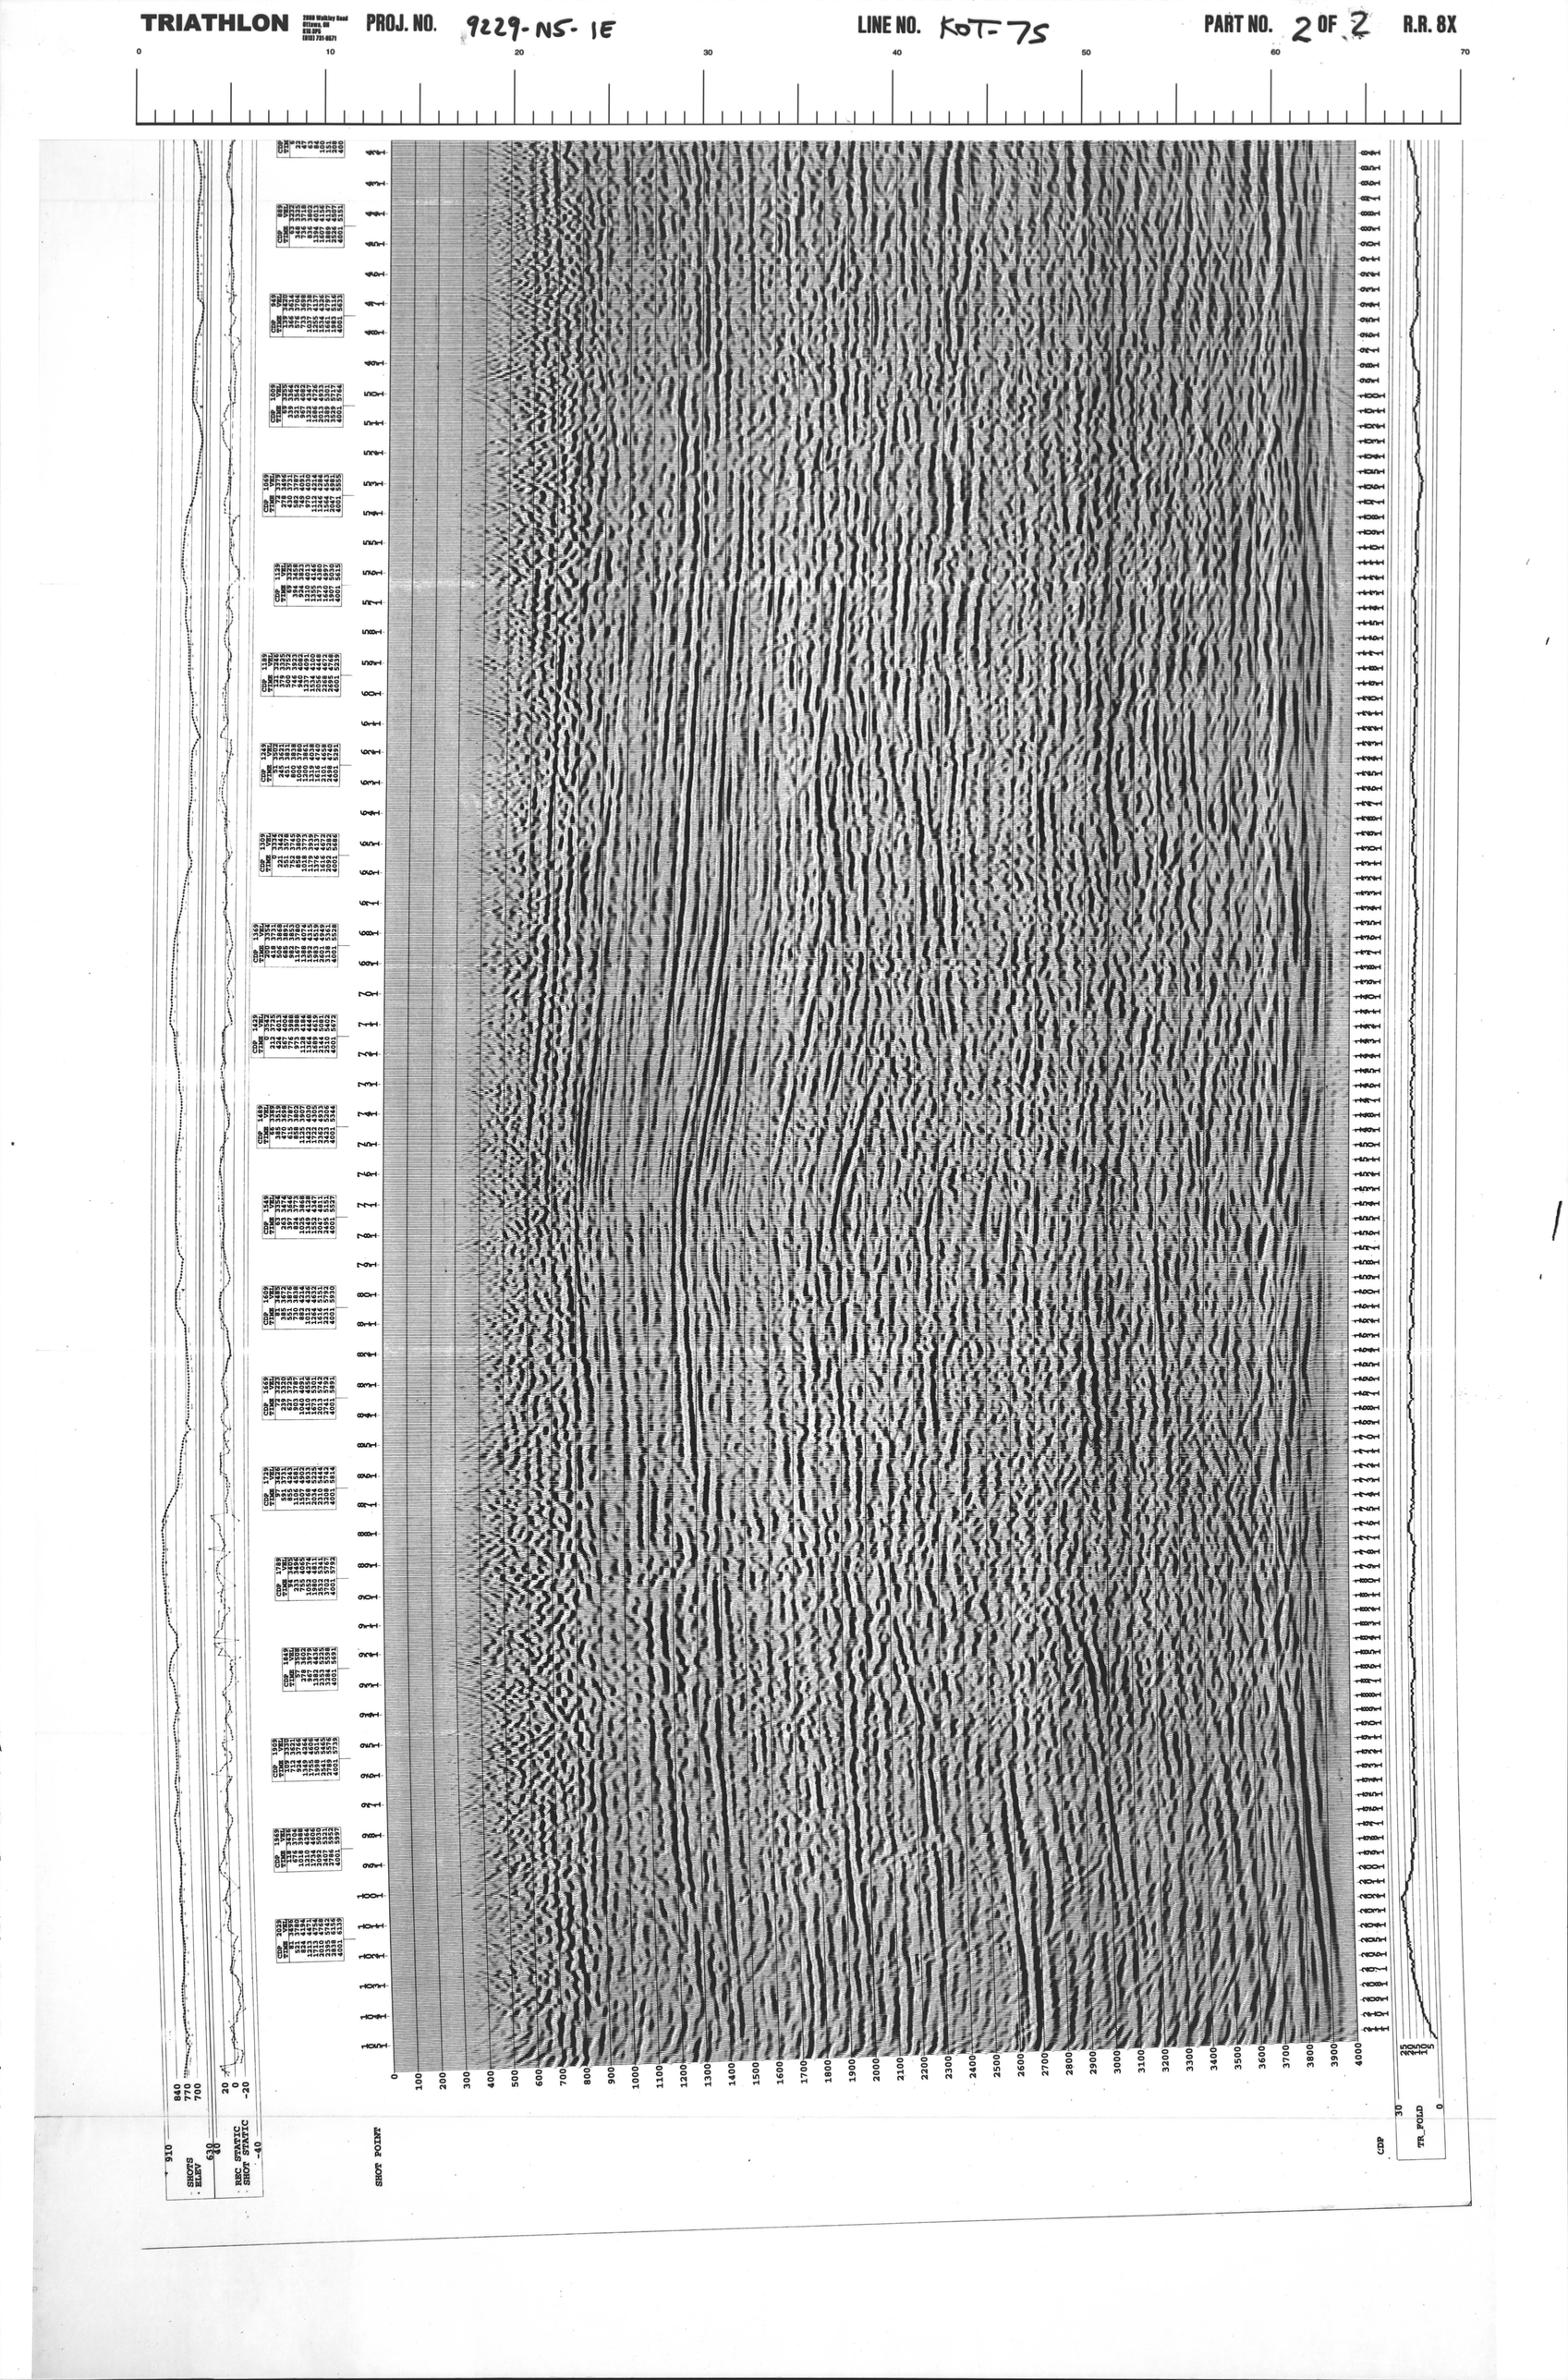
TRIATHLON
PROJ. NO. 9229-NS-1E
LINE NO. KOT-75
PART NO. 2 OF 2
R.R. 8X
SHOT POINT
CDP
FR_FOLD