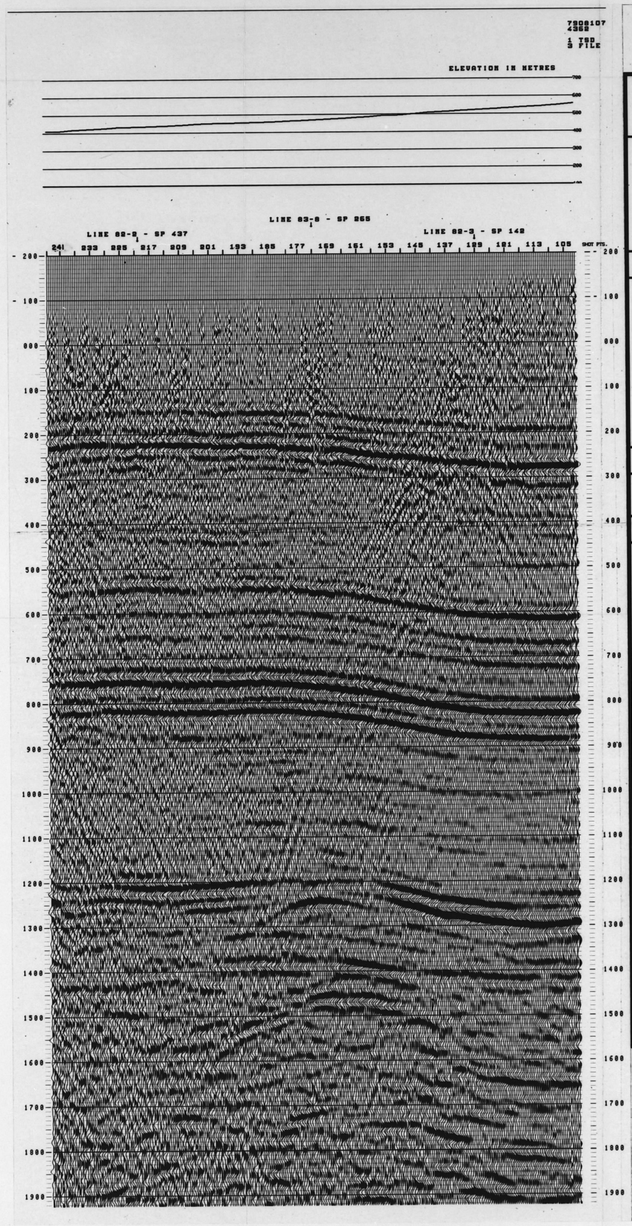

9229-N9-2E

PETREL CONSULTANTS LTD.
NSM RESOURCES LTD.

CONVENTIONAL STACK
NORMAL POLARITY

AREA: ARROWHEAD
LINE: 83-9
LOCATION: N.W.T.
NW 245 SHOT POINTS 101 SE

FIELD RECORDING

DATE: JAN. 1983
RECORDED BY: ENERTEC GEOPHYSICAL SERVICES LTD.
ENERGY SOURCE: DYNAMITE 1 HOLE AT 18.3 M
RECORDER TYPE: DFS-V SAMPLE RATE 2 MS.
GAIN CONTROL: FLOATING POINT
FIELD FILTER: 8 - 128 HZ
GEOPHONES/GROUP: 9 AT 3.75 M TYPE: MARK 14 HZ
COVERAGE 1200% SHOT INT. 134 M GROUP INT. 33.5 M
1600 - 33.5 X 33.5 - 1600

COMPUTATIONS

STRUCTURAL DATUM 305 M
REPLACEMENT VELOCITY 2440 M/SEC

PROCESSING PARAMETERS

DATE: APRIL 1983
1. DEMULTIPLEX SAMPLE RATE 4 MS.
2. TRACE GATHER
3. AMPLITUDE RECOVERY
4. DECONVOLUTION TYPE: SPIKING
GATE: 500 - 2500 MS.
OPERATOR LENGTH: 80 MS.
PRE-WHITENING: 3 %
5. NMO WELL TDT
6. STATIC CORRECTIONS ELEV/TUN/DRIFT
7. BRUTE STACK
8. COMMON OFFSET STACK
9. RNMO
10. AUTOMATIC RESIDUAL STATICS
GATE: 620 - 2200 MS.
11. FIRST BREAK MUTE TIME 0 DIST. 101
TIME 150 DIST. 134
TIME 200 DIST. 302
TIME 1300 DIST. 1608
TIME 2400 DIST. 3216
12. STACK 1200%
13. FILTER 12/16 - 85/100
14. TRACE EQUALIZATION
15. FILM DISPLAY 24 TR/IN 10 IN/SEC

TIME	VELOCITY
4	2108
200	2358
400	2608
600	2958
900	3308
1100	3508
1600	3875
3600	4200
5900	4658

Terra Surveys Ltd.
2060 Walkley Rd.
Ottawa, Ont.
Canada K1G 3P5
Tel. (613) 731-9571
Telex. 053-3502
Cable: TERRA
PROJ. NO. 9229 N9 2E
LINE NO. 83-9
PART NO. 1 OF 1
R.R. 10X