


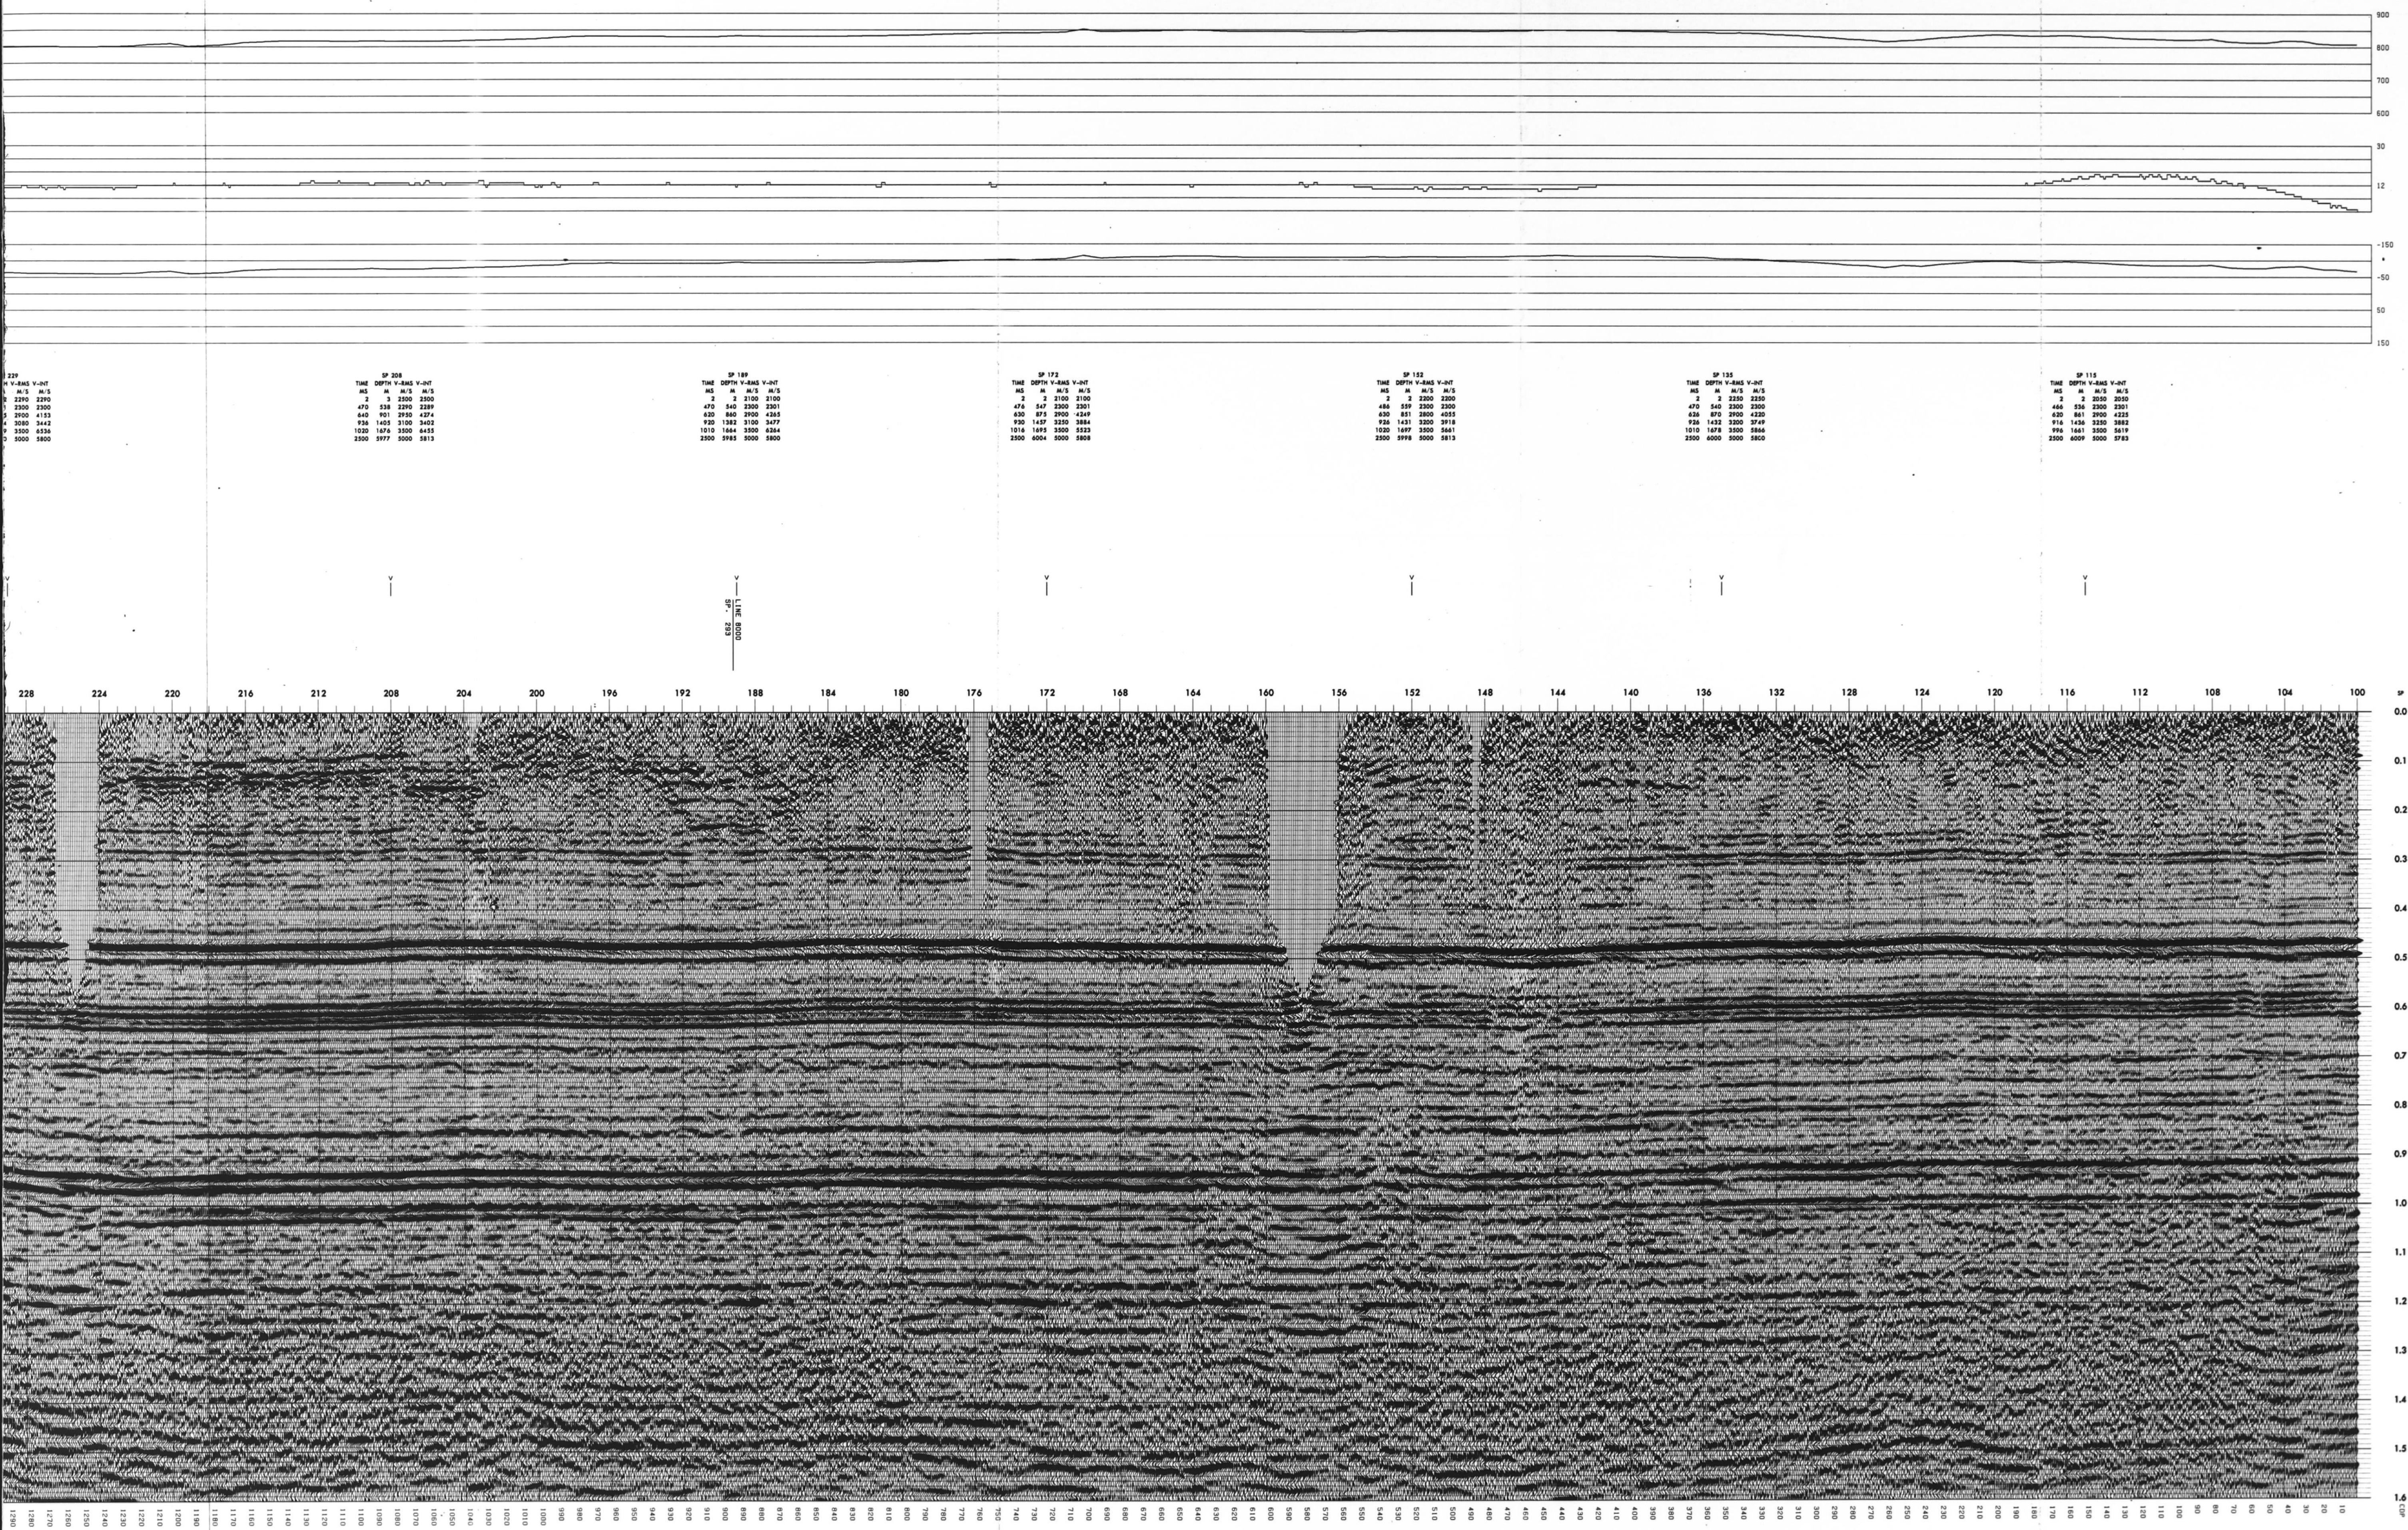

CLIENT: PETRO-CANADA
AREA: CAMERON HILLS
LINE: 8029
SHOTS: 100-378
LOCATION: NORTHWEST TERRITORIES
NTS: 85C
FOLD: 1200%
POLARITY: NORMAL
PROCESS: MIGRATED STACK

ACQUISITION: SEFEL GEOPHYSICAL LTD.
DATE SHOT: FEB. 1985

SPREAD
SHOOTING DIRECTION: NE TO SW
STATION INTERVAL: 30 METERS
SHOT INTERVAL: 100 METERS
NO. OF TRACES: 120
SPREAD CONFIGURATION: 1220-60-X-40-1220 METERS
INSTRUMENTS
MAKE/MODEL: DFS V
SAMPLE RATE: 2 MS
RECORD LENGTH: 4 SEC
FILTER: 12/18 - 128/72 HZ/OCT
NOTCH FILTER: OUT
TAPE FORMAT: SEGB 120 TRACES
RECEIVERS
TYPE: GEOSPAC GS200 14 HZ
NUMBER PER GROUP: 9
SPACING: 2.5 METERS
SOURCE
TYPE: DYNAMITE
CHARGE SIZE: 1/2 KG. EACH HOLE
SOURCE LAYOUT: 5 HOLES IN LINE

PROCESSING: SEISCOM DELTA UNITED (CANADA) LTD.
CENTER: CALGARY, ALBERTA
DATE: APRIL 1985

DEMULPLEX
PROCESSING SAMPLE RATE: 2 MS
PROCESSING RECORD LENGTH: 2.0 SEC
REFORMAT TO: SEGY, 32 BIT, FLOATING POINT
AMPLITUDE RECOVERY
SPHERICAL DIVERGENCE: TO 600 MS
EXPONENTIAL GAIN: 1.4dB/SEC FROM 0 TO 2000 MS
DECONVOLUTION
TIME CONSTANT: SPKING
TYPE: 80 MS
OPERATOR LENGTH: 0.15
PREWHITE: 1100 MS
DESIGN WINDOW LENGTH: 1100 MS
STATICS
DEPT SHOT AND RECEIVER STATICS: 750 METERS
DATUM: 2100 M/S
REPLACEMENT VELOCITY: 610 M/S
WEATHERING VELOCITY:
PRELIMINARY VELOCITY ANALYSIS
TYPE: DOVE VELOCITY SPECTRA (DATUM REFERENCED)
INTERVAL: EVERY 4 KM
RESIDUAL STATICS
TYPE: SURFACE CONSISTENT
WINDOW: 400 - 1100 MS
VELOCITY ANALYSIS
TYPE: DOVE VELOCITY SPECTRA (DATUM REFERENCED)
INTERVAL: EVERY 2 KM
VERIFICATION: COMMON OFFSET STACK
NMO
INTERVAL VELOCITIES COMPUTED BY DIX EQUATION
FRONT MUTE
RANGE (M) TIME (MS)
240 0
280 350
720 700
1220 900
2440 1800
TRIM STATICS
WINDOW: 400 - 1100 MS
MAXIMUM ALLOWABLE STATIC: 8 MS
CDP STACK
FOLD: 1200%
WAVE EQUATION MIGRATION
80 PCT. OF INTERVAL VELOCITY APPLIED
FILTER
TYPE: TRIANGULAR ZERO PHASE
SP - 25 - 75 - 25 HZ
TRACE EQUALIZATION
SLIDING WINDOW LENGTH: 400 MS
PERCENT: 100 %
DISPLAY
HORIZONTAL SCALE: 36 TR/INCH
VERTICAL SCALE: 7.5 INCHES/SEC
REMARKS: LINE TIES ESTIMATED FROM UTM
SURFACE CONSISTENT SHOT AND RECEIVER STATICS PICKED BETWEEN SP. 316-348

PROCESSED BY: PHILIP LEUNG
QUALITY CONTROL BY: CAROL MORRISON



2000 Valley Rd. Ottawa, Ont.
Canada K1G 3P5
Tel: 613 231-1571
Fax: 613 231-1572
E-mail: info@terra-proj.com

PROJ. NO.

9 2 2 9 - P 2 8 - 9 E


LINE NO.

8 0 2 9

PART NO.

2 OF 2

R.R. 8X

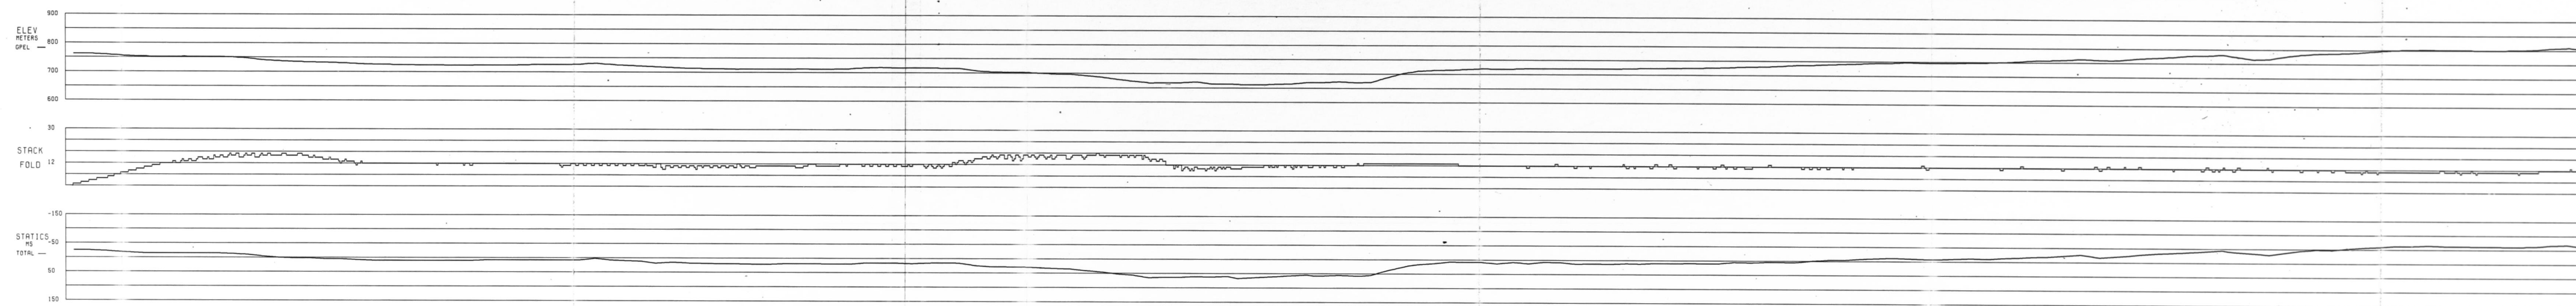

SP 248			
TIME	DEPTH	V-AMS	V-INT
MS	M	M/S	M/S
2	2	2100	2100
470	531	2260	2261
446	501	2290	2302
950	1447	3150	3590
1040	1720	3500	6068
2500	5981	5000	5838

SP 229			
TIME	DEPTH	V-AMS	V-INT
MS	M	M/S	M/S
2	2	2290	2290
470	541	2300	2300
636	885	2900	4113
926	1384	3080	3442
1010	1659	3500	6536
2500	5980	5000	5800