


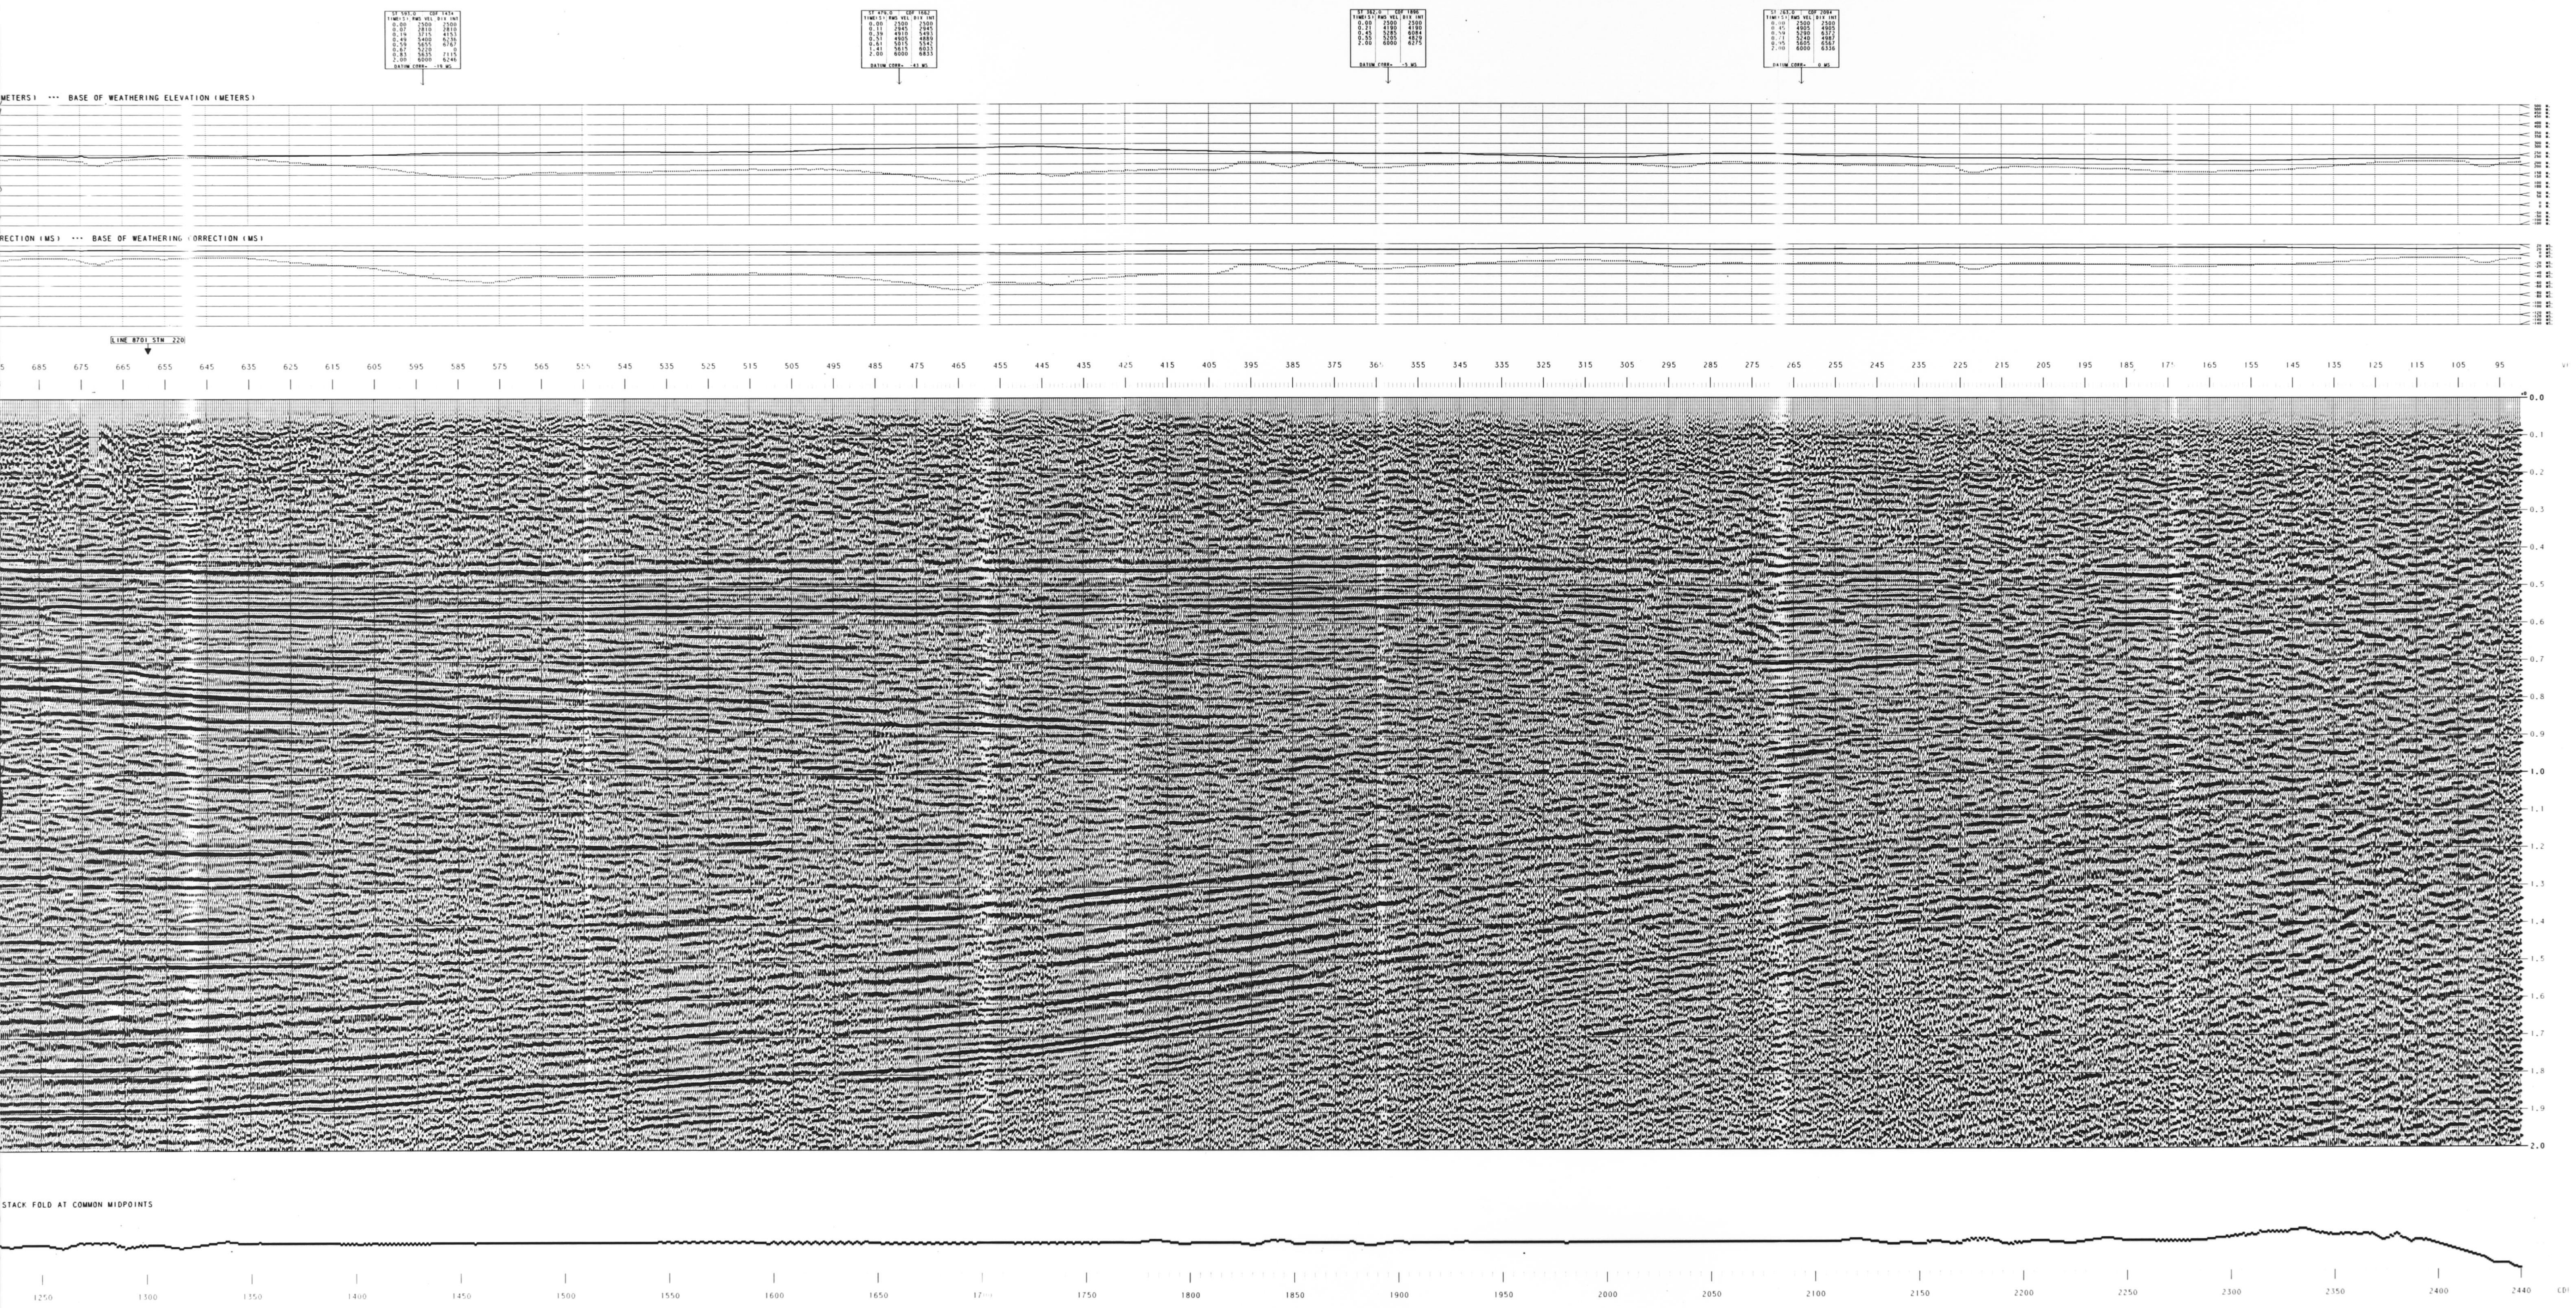

STATION	TIME	DEPTH	VELOCITY
1250	0.00	0.00	0.00
1260	0.00	0.00	0.00
1270	0.00	0.00	0.00
1280	0.00	0.00	0.00
1290	0.00	0.00	0.00
1300	0.00	0.00	0.00
1310	0.00	0.00	0.00
1320	0.00	0.00	0.00
1330	0.00	0.00	0.00
1340	0.00	0.00	0.00
1350	0.00	0.00	0.00
1360	0.00	0.00	0.00
1370	0.00	0.00	0.00
1380	0.00	0.00	0.00
1390	0.00	0.00	0.00
1400	0.00	0.00	0.00
1410	0.00	0.00	0.00
1420	0.00	0.00	0.00
1430	0.00	0.00	0.00
1440	0.00	0.00	0.00
1450	0.00	0.00	0.00
1460	0.00	0.00	0.00
1470	0.00	0.00	0.00
1480	0.00	0.00	0.00
1490	0.00	0.00	0.00
1500	0.00	0.00	0.00

STATION	TIME	DEPTH	VELOCITY
1510	0.00	0.00	0.00
1520	0.00	0.00	0.00
1530	0.00	0.00	0.00
1540	0.00	0.00	0.00
1550	0.00	0.00	0.00
1560	0.00	0.00	0.00
1570	0.00	0.00	0.00
1580	0.00	0.00	0.00
1590	0.00	0.00	0.00
1600	0.00	0.00	0.00
1610	0.00	0.00	0.00
1620	0.00	0.00	0.00
1630	0.00	0.00	0.00
1640	0.00	0.00	0.00
1650	0.00	0.00	0.00
1660	0.00	0.00	0.00
1670	0.00	0.00	0.00
1680	0.00	0.00	0.00
1690	0.00	0.00	0.00
1700	0.00	0.00	0.00

STATION	TIME	DEPTH	VELOCITY
1710	0.00	0.00	0.00
1720	0.00	0.00	0.00
1730	0.00	0.00	0.00
1740	0.00	0.00	0.00
1750	0.00	0.00	0.00
1760	0.00	0.00	0.00
1770	0.00	0.00	0.00
1780	0.00	0.00	0.00
1790	0.00	0.00	0.00
1800	0.00	0.00	0.00
1810	0.00	0.00	0.00
1820	0.00	0.00	0.00
1830	0.00	0.00	0.00
1840	0.00	0.00	0.00
1850	0.00	0.00	0.00
1860	0.00	0.00	0.00
1870	0.00	0.00	0.00
1880	0.00	0.00	0.00
1890	0.00	0.00	0.00
1900	0.00	0.00	0.00

STATION	TIME	DEPTH	VELOCITY
1910	0.00	0.00	0.00
1920	0.00	0.00	0.00
1930	0.00	0.00	0.00
1940	0.00	0.00	0.00
1950	0.00	0.00	0.00
1960	0.00	0.00	0.00
1970	0.00	0.00	0.00
1980	0.00	0.00	0.00
1990	0.00	0.00	0.00
2000	0.00	0.00	0.00
2010	0.00	0.00	0.00
2020	0.00	0.00	0.00
2030	0.00	0.00	0.00
2040	0.00	0.00	0.00
2050	0.00	0.00	0.00
2060	0.00	0.00	0.00
2070	0.00	0.00	0.00
2080	0.00	0.00	0.00
2090	0.00	0.00	0.00
2100	0.00	0.00	0.00

9 2 2 9 - P 2 8 - 1 3 E

45678 0.731-04

LINE 8728
V.P. 1265-89
STRUCTURAL STACK

NORMAL POLARITY
NORTH-EAST

PETRO-CANADA INC.	
PROCESSED BY: WESTERN GEOPHYSICAL DIVISION OF LITTON INDUSTRIES	
AREA: COLVILLE, N.W.T.	
SURVEY DATE: FEBRUARY 1980	
PROCESSING DATE: FEBRUARY 1980	
RECORDED BY: WESTERN GEOPHYSICAL CO. LTD.	
REPLACEMENT VELOCITY: 6000 M/SEC	
DATUM ELEVATION: 305 METERS	
RECORDING INFORMATION	
SOURCE:	
ENERGY SOURCE	VIBROSEIS
VIBRATION MODEL	LRS-500
SHEEP FREQUENCY	20-100 HZ LINEAR
SHEEP LENGTH	6 SEC
NUMBER OF SHEEPS	6
DRUG LENGTH	60 M
SOURCE TO FIRST RECEIVER	60 M
VIB. POINT INTERVAL	60 M
GROUPS SHOT IN GAP	7
INSTRUMENTS:	
AMPLIFIER	DFS V
FILTER	005-120 HZ
SAMPLING INTERVAL	2 MS
RECORD LENGTH	9 SEC
60 HZ NOTCH FILTER	005
TIME FINDER	SEC-B
RECEIVERS:	
GEOPHONE TYPE	LRS-1011 1A HZ
GEOPHONE GROUP	8 OVER 20 M
GROUPS RECORDED	56
GROUP INTERVAL	20 M
PERCENT COVERAGE	2500 %
SPREAD GEOMETRY:	
SOURCE	1
TRACES	48
DISTANCE	1000 M
PROCESSING SEQUENCE AND PARAMETERS:	
PROCESSING SAMPLE INTERVAL: 2 MS.	
1. DEMULTIPLY:	
HORIZONTAL CORRELATION	
PROCESSED TO 1.0 SECONDS	
2. TRACE EDIT:	
REMOVED 20 OF EVERY RECORD	
3. GEOMETRY COMPUTATIONS:	
RELATING TO DISTANCES	
4. 60 HZ NOTCH FILTER	
5. F-H DOMAIN FILTER:	
ATTENUATION: 20 DB	
6. PHASE COMPENSATION:	
0.1-1.0 M/SEC	
7. AMPLITUDE COMPENSATION:	
0.1-1.0 M/SEC	
8. ZERO-PHASE FREQUENCY DECONVOLUTION:	
NEAR TRACE START TIME	
START TIME: 0.000000	
MINIMUM FREQUENCY: 0.1 HZ	
PERCENT PRE-WATERING: 0.1 %	
9. PRESTRESS DECONVOLUTION:	
NEAR TRACE START TIME	
START TIME: 0.000000	
MINIMUM FREQUENCY: 0.1 HZ	
PERCENT PRE-WATERING: 0.1 %	
10. C.D.P. SORT	
11. STATIC COMPUTATIONS:	
WIND SPEED: 0.000000	
12. AUTOMATIC STATISTICS (WIDE):	
WIDE: 0.000000	
13. VELOCITY ANALYSIS (WIDE):	
WIDE: 0.000000	
14. NORMAL, WIDEOUT CORRECTION	
WIDE: 0.000000	
15. WIDE PATTERN:	
WIDE: 0.000000	
16. STACK:	
WIDE: 0.000000	
17. TIME VARIATION FILTER:	
WIDE: 0.000000	
18. RESECTION STRENGTH GAIN:	
WIDE: 0.000000	
19. END GAIN:	
WIDE: 0.000000	
DISPLAY PARAMETERS	
HORIZONTAL SCALE	24 TRACES PER INCH
VERTICAL SCALE	7.5 INCHES PER SECOND
PLOTTING GAIN	12 DB

