


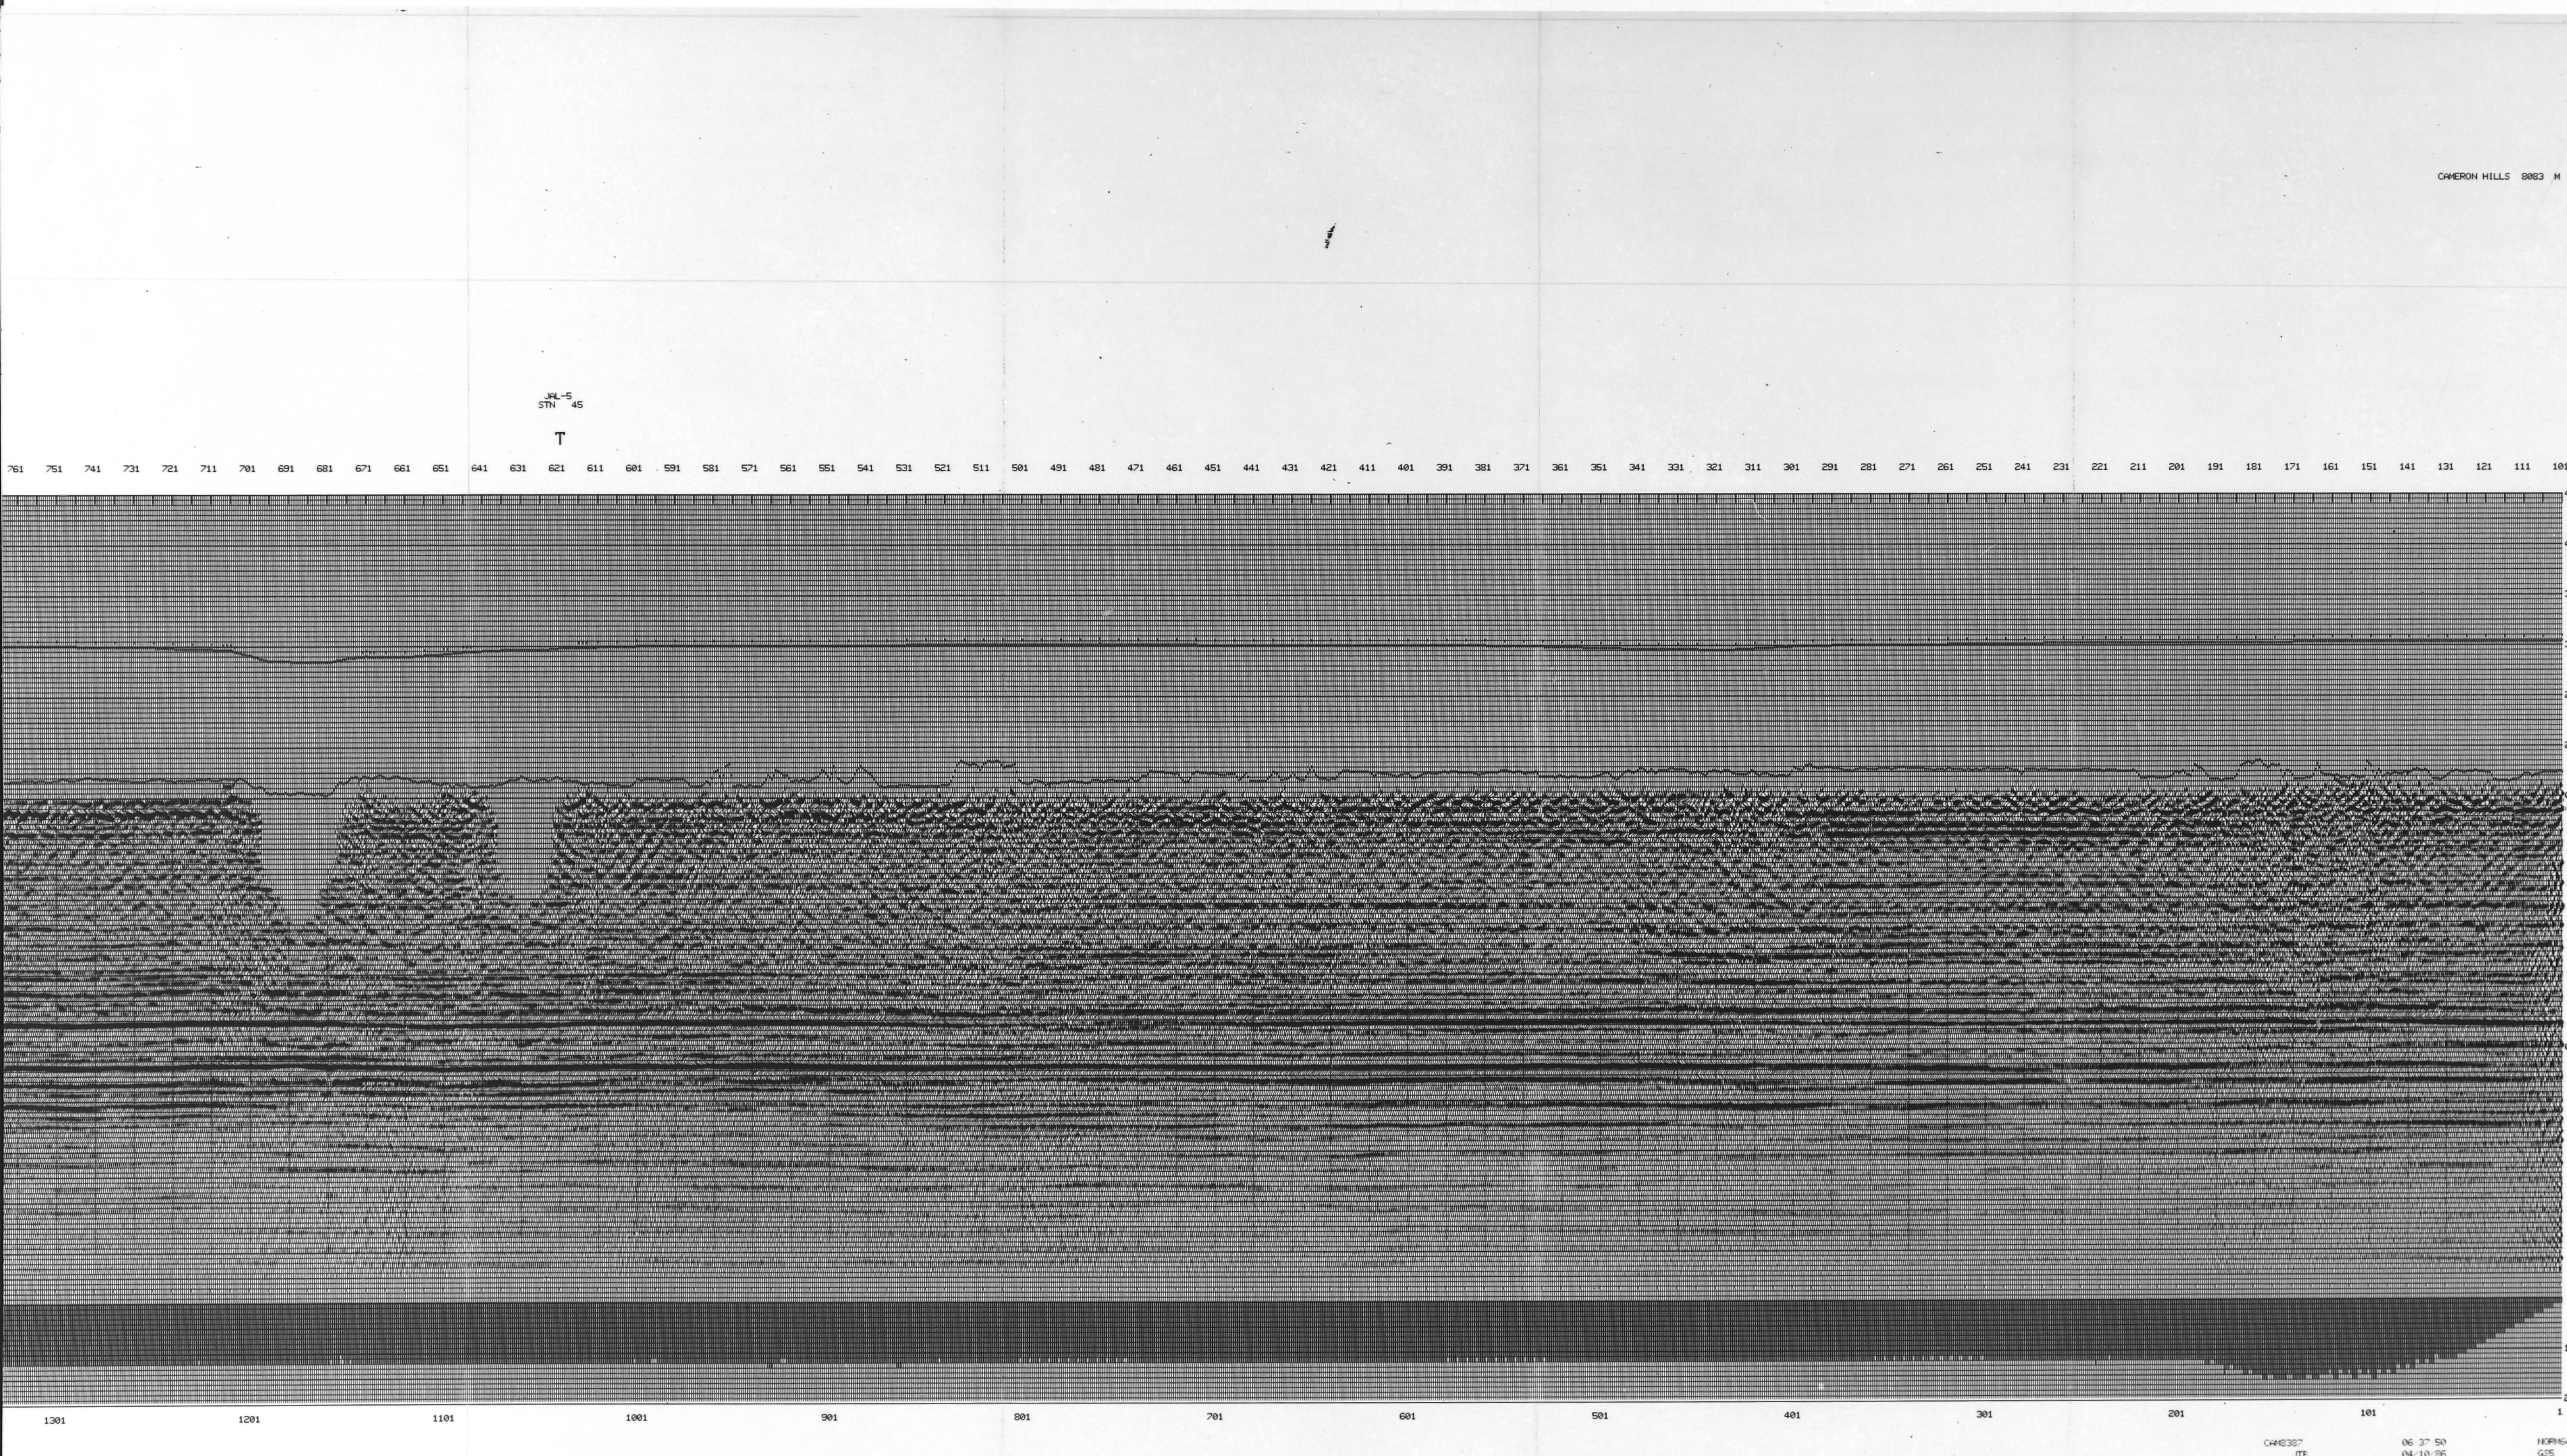

SURFACE
REFERENCE
VELOCITY
TABULATIONS

PETRO-CANADA
EXPLORATION INC.

LINE: 86-PCR-8083
PROJECT: CAMERON HILLS
LOCATION: NORTHWEST TERRITORIES
NTS: 85C

SP 1016 N SP 101

MIGRATED SECTION


POLARITY ☒ NP ☐ RP
FIRST KICK POLARITY ABOVE FOLD BARS. PEAKS ARE POSITIVE NUMBERS

ACQUISITION PARAMETERS

SHOT BY: SONICS EXPLORATION PTY. 901
DATE: FEB 1986
SPREAD: 630 M - 40 M - 40 M - 630 M
SOURCE INTERVAL: 50 M
RECEIVER INTERVAL: 10 M
SOURCE: VIBROSEIS, 3 VIBRS, 30 M DRAG,
12 SEC SHEEP, 14-80 HZ, 8 SURS
RECEIVERS: OTO, 14 HZ, 9 OVER 10 METERS
INSTRUMENTS: DVS-V FT-1 120 TRACE
GAIN MODE: IFP
TAPE FORMAT: SEC Y
FIELD FILTERS: OUT-120 HZ NOTCH: OUT
SAMPLE RATE: 2 MS.

PROCESSING PARAMETERS

PROCESSED BY GEO-X
DATE: FEB 1986
DIGITAL CONVERSION
AMPLITUDE RECOVERY (AT/EXP(BT))
DECONVOLUTION TYPE: ZERO-PHASE
OPERATOR LENGTH: 60 MS.
PREWHITENING: 1 2
GATE: 200-1000 MS. AT 0 OFFSET
450-1030 MS. AT 630 M OFFSET
STRUCTURAL CORRECTIONS DATUM ELEVATION: 300 M
DATUM VELOCITY: 4500 M/SEC.
PROCESSING DATUM: -100 MS.
ELEVATION, WEATHERING, AND DRIFT
(OPTIMIZED REFRACTION SURVEY)
ANALYSIS PRELIMINARY VELOCITIES AND STATICS
STATICS SURFACE STACK RESIDUAL
TRACE KILLS
VELOCITY ANALYSIS
FINAL MOVEOUT
NEAR SCALING 100-850 MS.
NOTE DISTANCE(M) 140 1260
TIME(MS) 210 1000
STATICS SURFACE CONSISTENT RESIDUAL
WINDOW: 100-850 MS.
TRACE GATHER FOLD: 12
STATICS CDP CROSS CORRELATION
STACK
PREDICTIVE DECONVOLUTION OPERATOR LENGTH: 60 MS.
PREDICTION DISTANCE: 30 MS.
WINDOW: 50-850 MS.
MIGRATION K-K MIGRATION
BOX STACKING VELOCITIES
FILTER 14/18 - 80/90 HZ
EQUALIZATION NEAR WINDOW: 100-850 MS.
DISPLAY HORIZONTAL SCALE = 36 TR./IN.
VERTICAL SCALE = 7.5 IN./SEC.

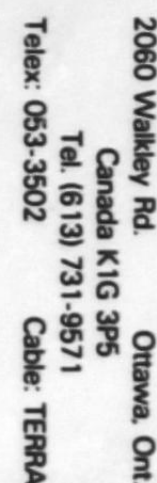

PROJ. NO.

9

2

2

30



2

8

•

1

or



NI

DN

2

1

2

2

—

8

2

88

AR

N

2

7

2

R.

3X

