

9229-P28-108

PETRO-CANADA
EXPLORATION INC.

LINE: 86-PCR-8014
PROJECT: CAMERON HILLS
LOCATION: NORTHWEST TERRITORIES
NTS: 85C

SP 101 S.E. SP 941

MIGRATED SECTION

POLARITY ☒ NP ☐ RP
FIRST KICK POLARITY ABOVE FOLD BARS, PEAKS ARE POSITIVE NUMBERS

ACQUISITION PARAMETERS

SHOT BY: SONICS EXPLORATION PTY. 901
DATE: FEB 1986
SPREAD: 630 M - 40 M * 40 M - 630 M
SOURCE INTERVAL: 50 M
RECEIVER INTERVAL: 10 M
SOURCE: VIBROSEIS, 3 VIBRS, 30 M DRAG,
12 SEC SWEEP, 6 SUNS, VARI SWEEP
010, 14 HZ, 8 OVER 10 METERS
RECEIVERS:
INSTRUMENTS: DFS-V FT-1 120 TRACE
GAIN MODE: IFP
TAPE FORMAT: SEC 1
FIELD FILTERS: 8-128 HZ NOTCH: OUT
SAMPLE RATE: 2 MS.

PROCESSING PARAMETERS


PROCESSED BY GEO-X
DATE: MAR 1986
DIGITAL CONVERSION
AMPLITUDE RECOVERY (ATIEXPDT)
DECONVOLUTION TYPE: ZERO-PHASE
OPERATOR LENGTH: 60 MS.
PREWHITENING: 1 2
GATE: 200-1000 MS. AT 0 OFFSET
450-1030 MS. AT 630 M OFFSET
STRUCTURAL CORRECTIONS DATUM ELEVATION: 300 M
DATUM VELOCITY: 4500 M/SEC.
PROCESSING DATUM: -100 MS.
ELEVATION, WEATHERING, AND DRIFT
(DYNAMIC REFRACTION SURVEY)
ANALYSIS PRELIMINARY VELOCITIES AND STATICS
STATICS SURFACE STACK RESIDUAL
TRACE KILLS
VELOCITY ANALYSIS
FINAL MOVEOUT
MEAN SCALING: 100-850 MS.
MUTE DISTANCE (M) 140 1000
TIME (MS) 210 1000
STATICS SURFACE CONSISTENT RESIDUAL
WINDOW: 100-850 MS.
TRACE GATHER FOLD: 12
STATICS CDP CROSS CORRELATION
STACK
PREDICTIVE DECONVOLUTION OPERATOR LENGTH: 60 MS.
PREDICTION DISTANCE: 30 MS.
WINDOW: 50-850 MS.
MIGRATION K-K MIGRATION
80% STACKING VELOCITIES
FILTER 14/18 - 80/90 HZ
EQUALIZATION MEAN WINDOW: 100-850 MS.
DISPLAY HORIZONTAL SCALE = 36 TR./IN.
VERTICAL SCALE = 7.5 IN./SEC.

SURFACE
REFERENCE
VELOCITY
TABULATIONS

FLAG

SURFACE
ELEVATIONS

SURFACE
IN TIME

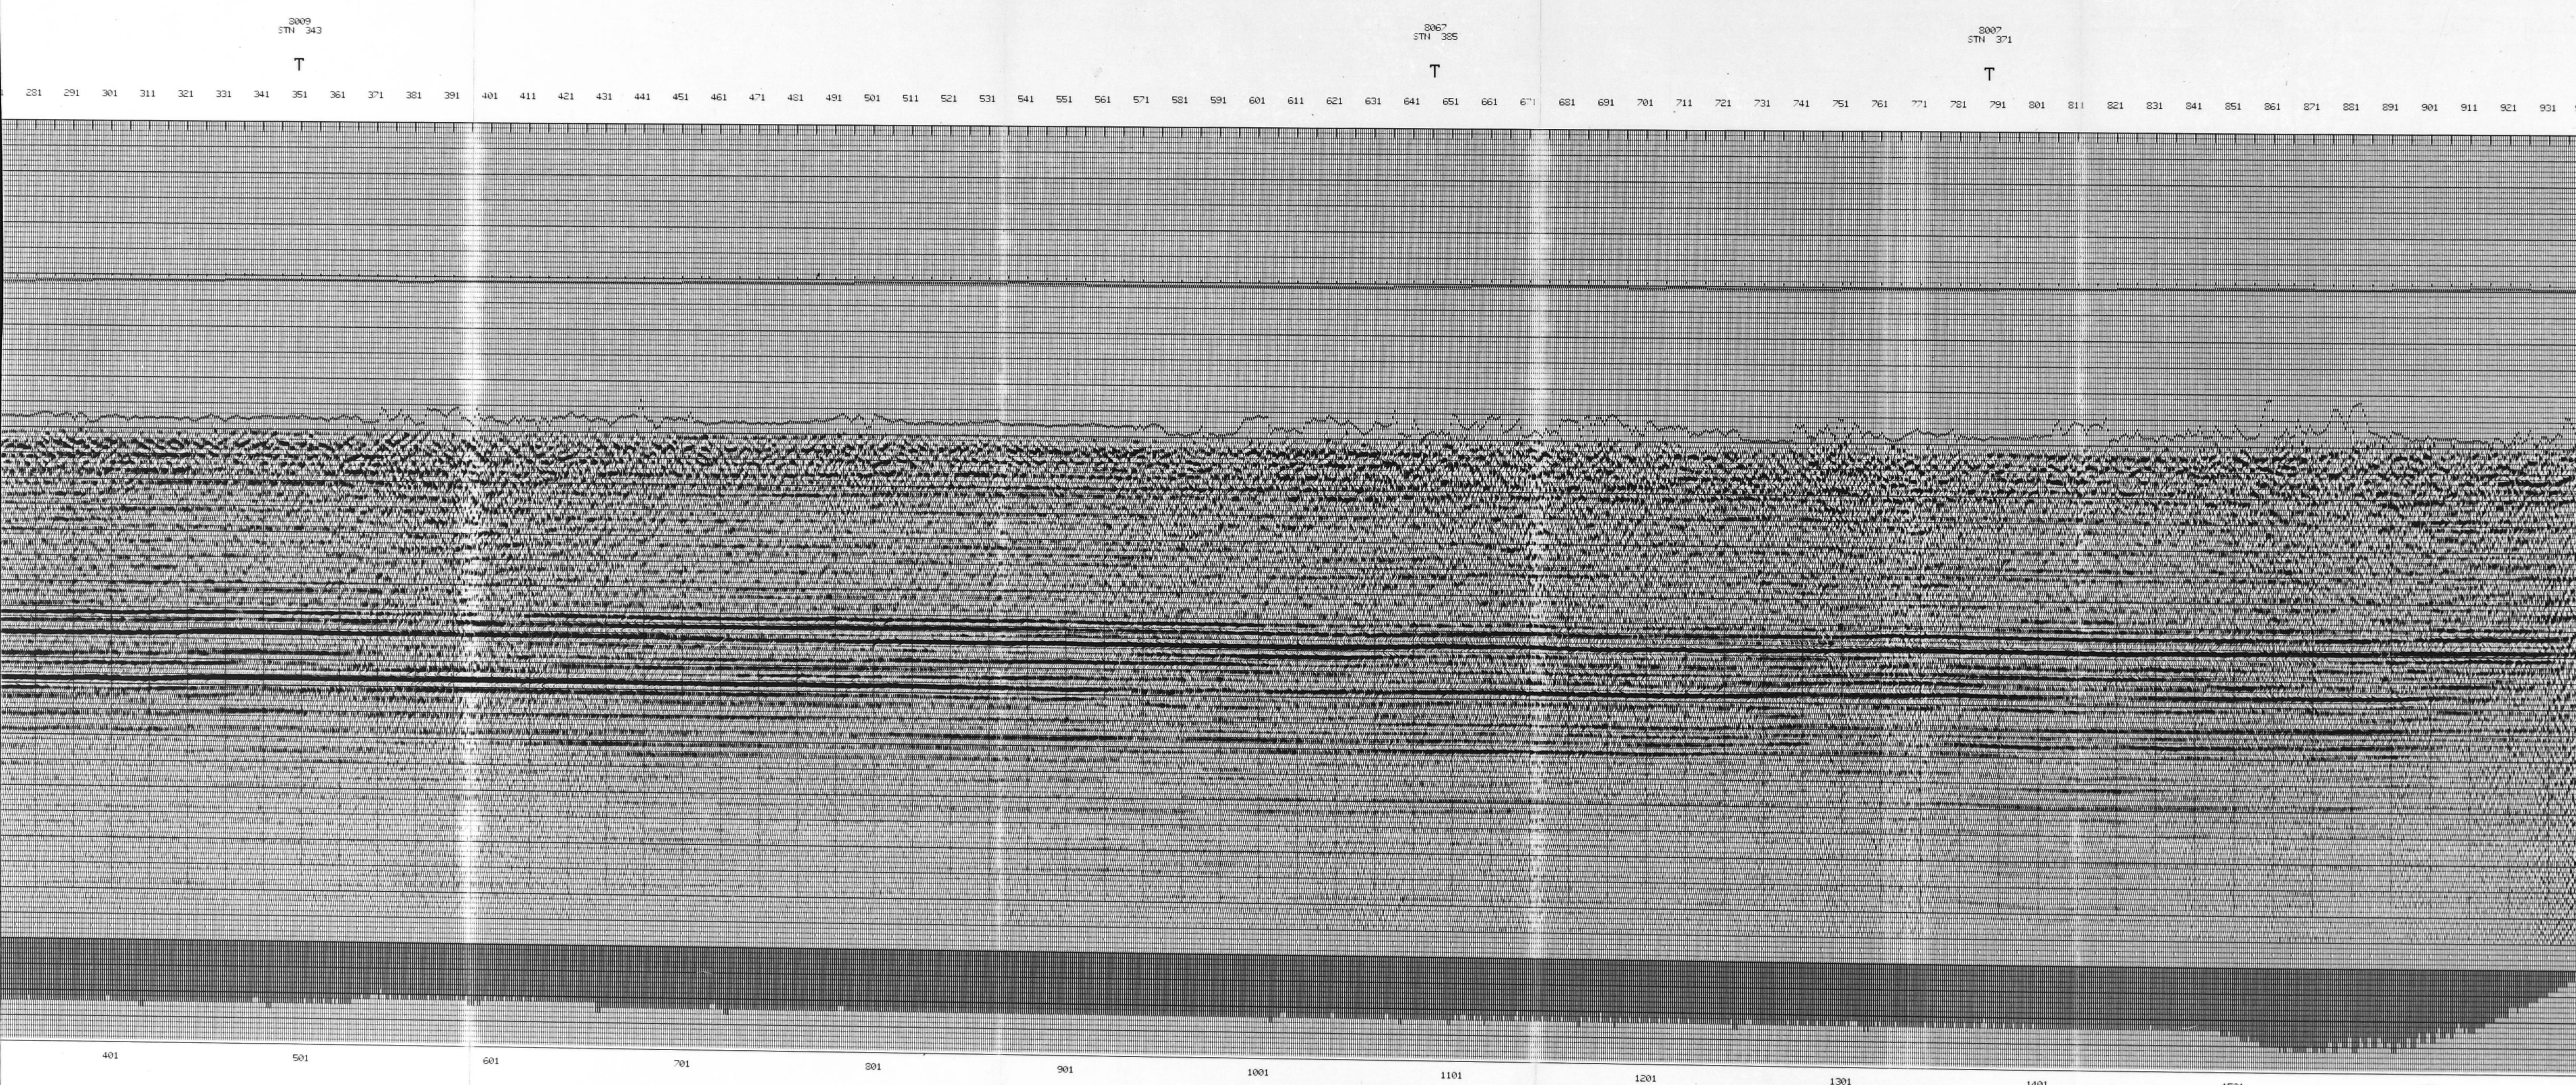



2000 Valley Rd. Ottawa, Ont.
Canada K1G 3P1
Tel: (613) 731-1501
Fax: (613) 731-1502
Cable: TERRA

PROJ. NO.

9

2

2

9

-

P

2

0

-

1

6

E

LINE NO.

8

6

-

P

C

R

-

8

0

1

4


PART NO.

2

OF

2

R.R. 8X



CHIEF OF HIGHWAY 2014 H

