



829-228-168

PETRO-CANADA
EXPLORATION INC.

LINE: 86-PCR-8093
PROJECT: CAMERON HILLS
LOCATION: NORTHWEST TERRITORIES
NTS: 85C

SP 401 N.E. SP 101

MIGRATED SECTION

POLARITY ☒ NP ☐ RP
FIRST KICK POLARITY ABOVE FOLD BARS. PEAKS ARE POSITIVE NUMBERS

ACQUISITION PARAMETERS

SHOT BY: SONICS EXPLORATION PTY. 901
DATE: FEB 1986
SPREAD: 630 M - 40 M * 40 M - 630 M
SOURCE INTERVAL: 50 M
RECEIVER INTERVAL: 10 M
SOURCE: VIBROSEIS, 3 VIBRS, 30 M DRAG,
12 SEC SWEEP, 6 SUMS, VARI SWEEP
OVS, 14 HZ, 3 OVER 10 METERS
RECEIVERS:
INSTRUMENTS: DFS-V FT-1 120 TRACE
GAIN MODE: IFP
TAPE FORMAT: SEC Y
FIELD FILTERS: 8-120 HZ NOTCH: OUT
SAMPLE RATE: 2 MS.

PROCESSING PARAMETERS

PROCESSED BY GEO-X
DATE: MAR 1986
DIGITAL CONVERSION
AMPLITUDE RECOVERY (ATIEXP(BT))
DECONVOLUTION TYPE: ZERO-PHASE
OPERATOR LENGTH: 60 MS.
PREWHITENING: 1.2
GATE: 200-1000 MS. AT 0 OFFSET
450-1030 MS. AT 630 M OFFSET
STRUCTURAL CORRECTIONS DATUM ELEVATION: 300 M
DATUM VELOCITY: 4500 M/SEC.
PROCESSING DATUM: -100 MS.
ELEVATION, WEATHERING, AND DRIFT
(DYNAMIC REFRACTION SURVEY)
ANALYSIS PRELIMINARY VELOCITIES AND STATICS
STATICS SURFACE STACK RESIDUAL
TRACE KILLS
VELOCITY ANALYSIS
FINAL MOVEOUT
MEAN SCALING 100-850 MS.
MUTE DISTANCE(M) 140 1260
TIME(MS) 210 1000
STATICS SURFACE CONSISTENT RESIDUAL
WINDOW: 100-850 MS.
TRACE GATHER FOLD: 12
STATICS CDP CROSS CORRELATION
STACK
PREDICTIVE OPERATOR LENGTH: 60 MS.
DECONVOLUTION PREDICTION DISTANCE: 30 MS.
WINDOW: 50-850 MS.
MIGRATION K-K MIGRATION
BOX STACKING VELOCITIES
FILTER 14/18 - 80/90 HZ
EQUALIZATION MEAN WINDOW: 100-850 MS.
DISPLAY HORIZONTAL SCALE = 36 IN./IN.
VERTICAL SCALE = 7.5 IN./SEC.

CAMERON HILLS 8093 M

3091
STN 271
HL-2
STN 49

T


3010
STN 411
STN 406
2093
STN 275

TT

T

HL-1
STN 64

T

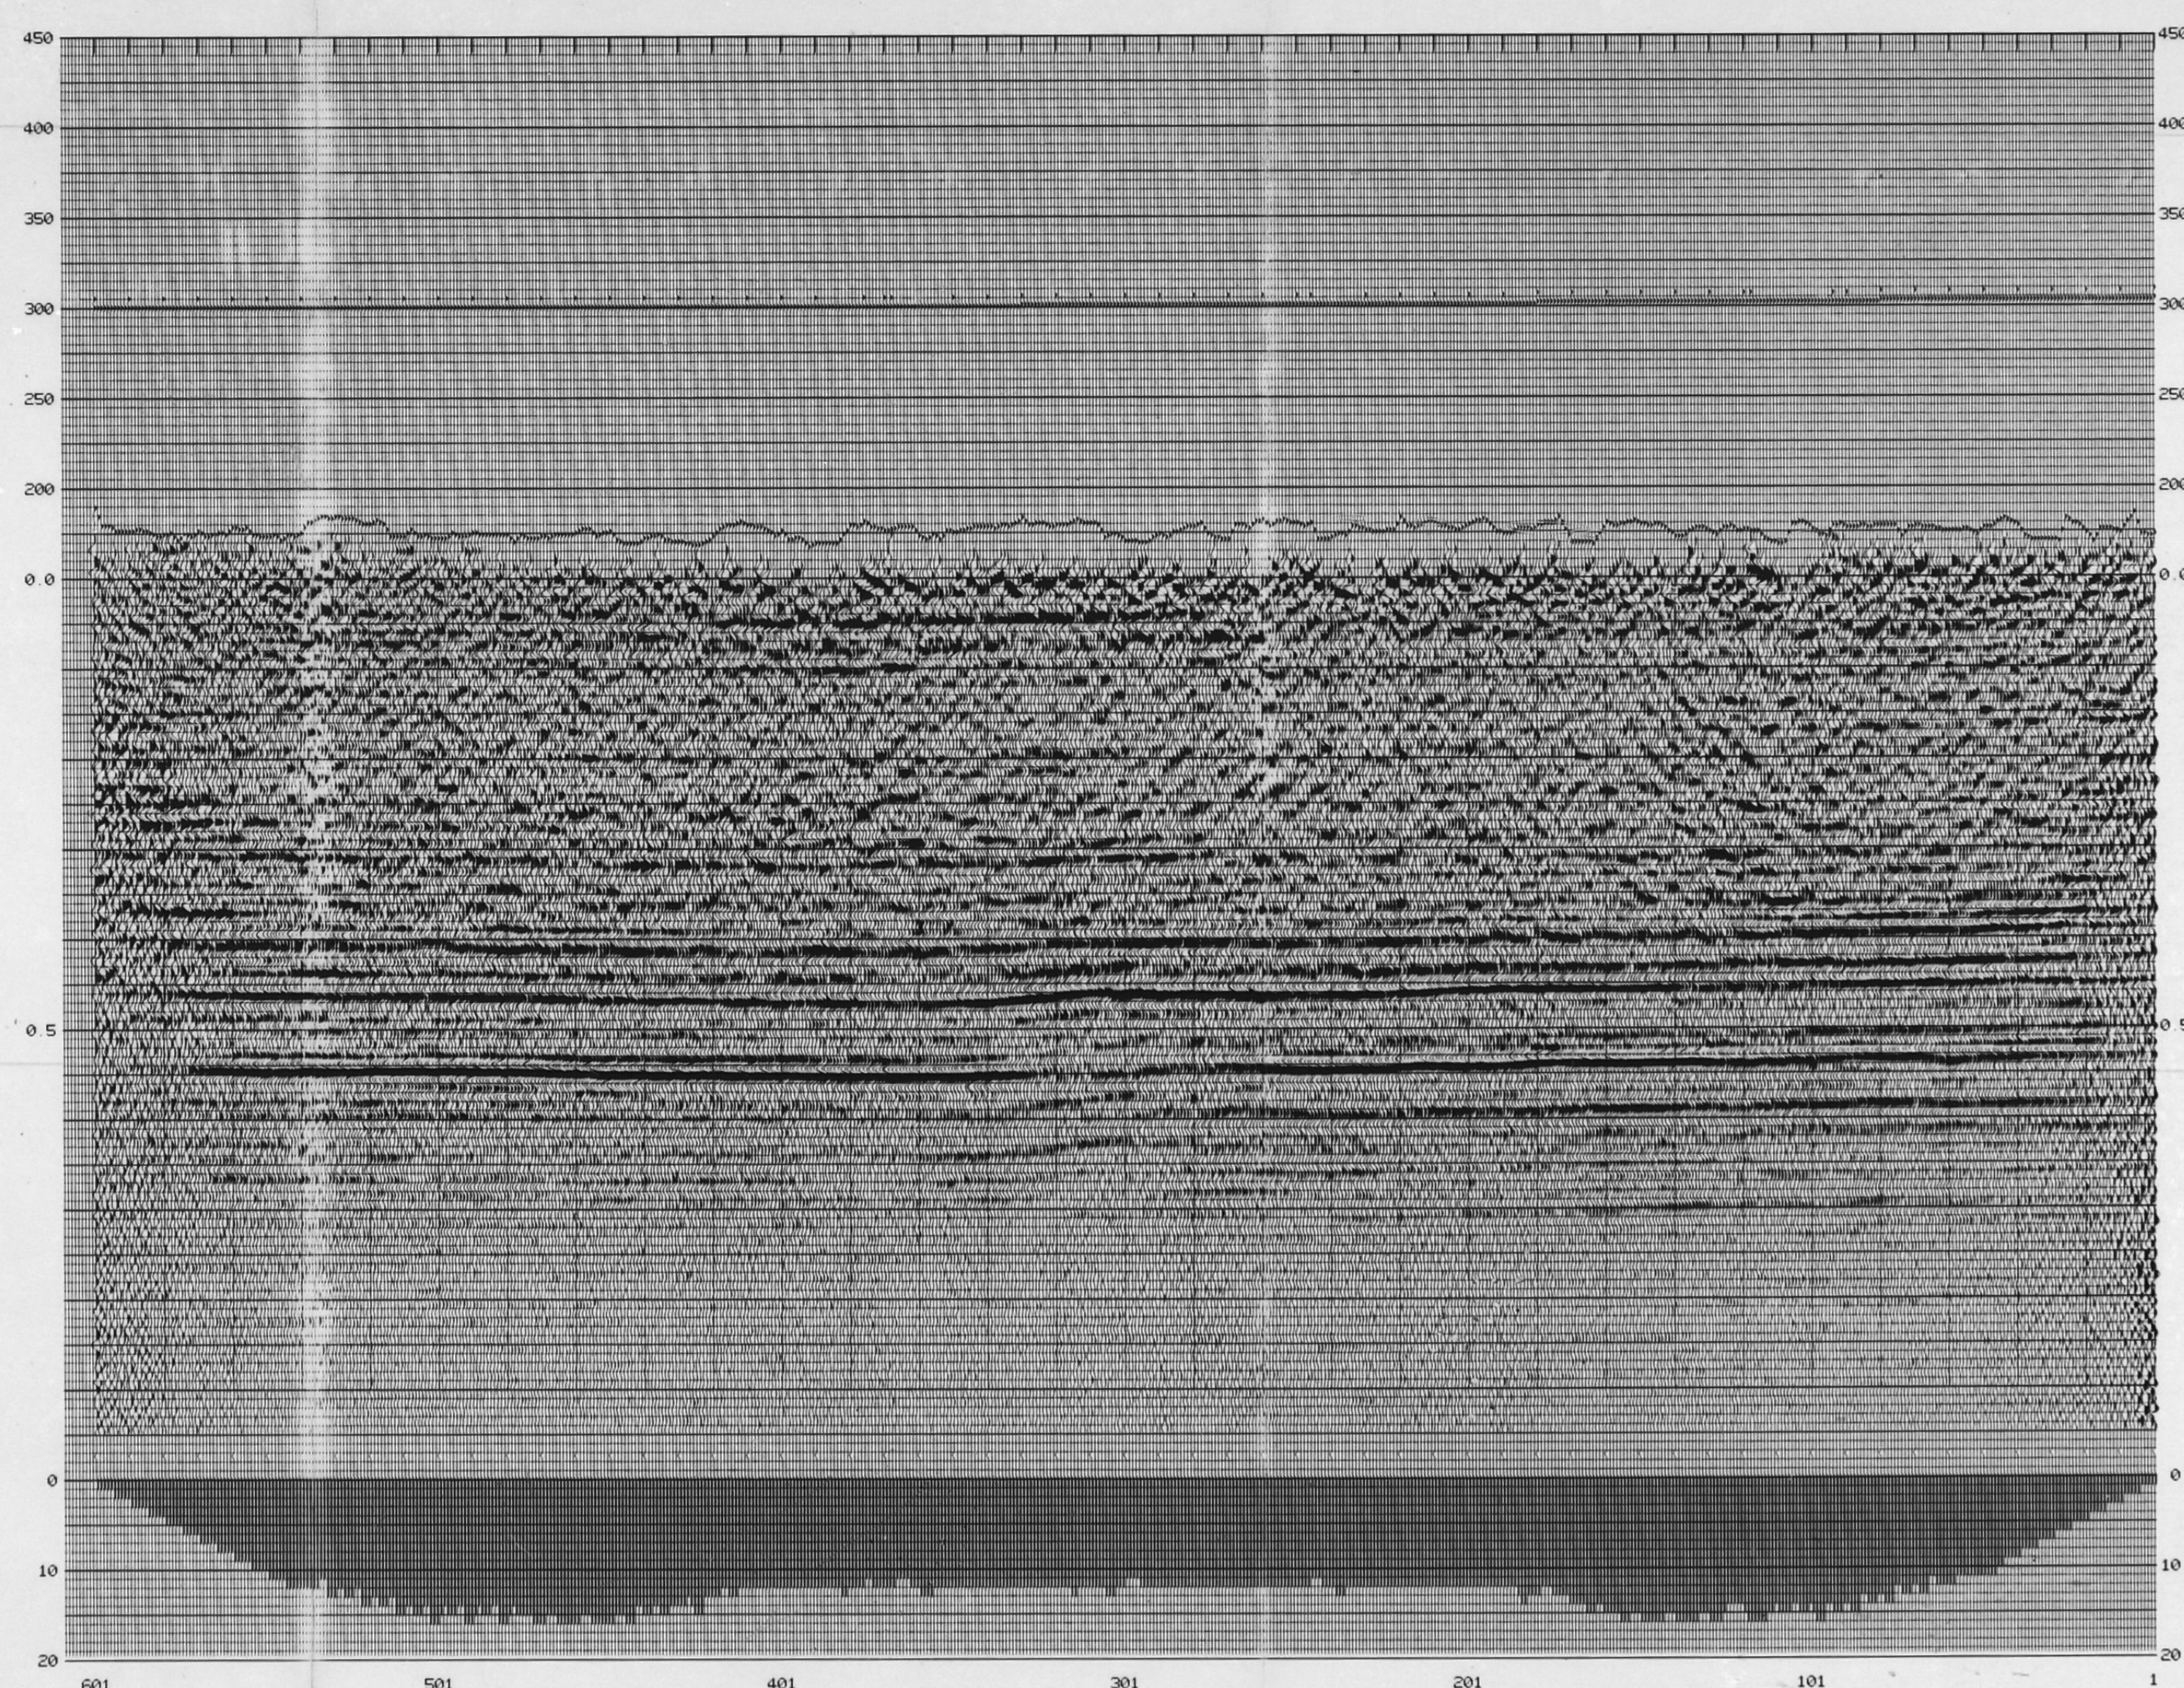

CHRONO
JTE
19-23-82
14-09-86
14-09-86
G/S