

PARAMOUNT ET AL CAMERON I-10

60° 10' N, 117° 30' W

Existing Bottom Hole Diagram (February 22, 1989)

KB: 816.25 m
GL: 811.95 m


60
387

This is a directional hole drilled from a Kick Off Point of 837 mKB to a Total Depth of 1563 mKB at an average inclination of 22°. All depths in mKb unless otherwise noted.

339 mm, 81.1 kg/m, K-55 casing set at 60 mKB. Cemented with 11.6 t 0:1:0 'G' cement + 2% CaCl₂. 2 m³ returns to surface.

244.5 mm, 53.6 kg/m, K-55 casing set at 387 mKB. Cemented with 29.6 t 0:1:0 'G' cement + 2% CaCl₂. 8 m³ cement returns.

139.7 mm, 23.07 kg/m, J-55 casing set at 1562 mKB. Cemented with 95 t 0:1:0 'G' cement + 0.2% R-5 + 0.75% T-10. No returns to surface.

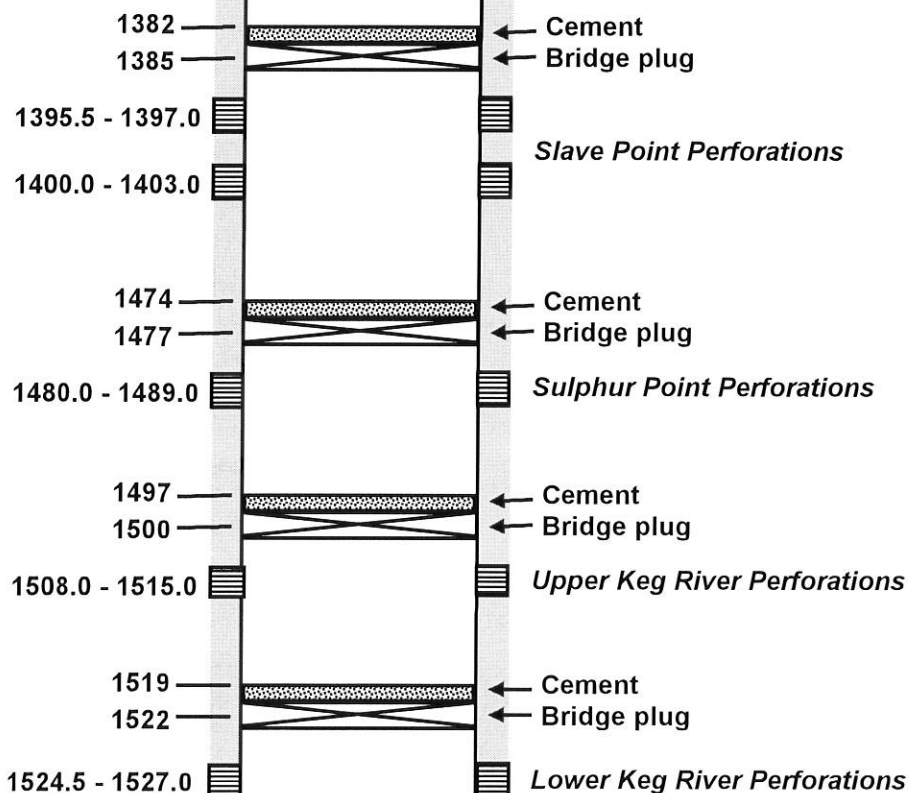

Total Depth = 1563 mKB
= 1522 mTVD

PBTD = 1546 mKB
Casing set at 1562 mKB