



PARAMOUNT ET AL NETLA M-23
00/ 60.404 / 126.263 /0
DST# 2


Baker Oil Tools

Formation: Landry
Interval - from: 2,048.00 to: 2,080.00 meters

Test Date: 1999-01-18
Test Type : Inflate Straddle

Recorder# N60 at 2,050.00 meters

Blow Description:
Misrun.

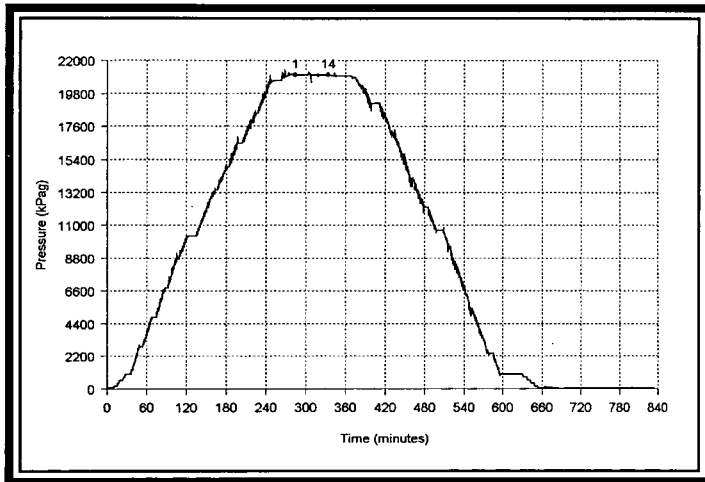

Remarks:

Misrun - unable to obtain a packer seat. Ruptured the top element.

Max Btm Hole Temperature @ FSI: 110.9 C


		Pressure (kPag)	Time (min)	Extrapolated Pressure (kPag)
1	Initial Hydrostatic	21022		
14	Final Hydrostatic	21000		

Liquid Recovery 0.00 meters

Recovery	Description
0.00 m	No fluid recovery


PARAMOUNT ET AL NETLA M-23
00/ 60.404 / 126.263 /0
DST #: 2
Recorder: N60

Pressure (kPag) at Critical Points:
1: 21022
14: 21000

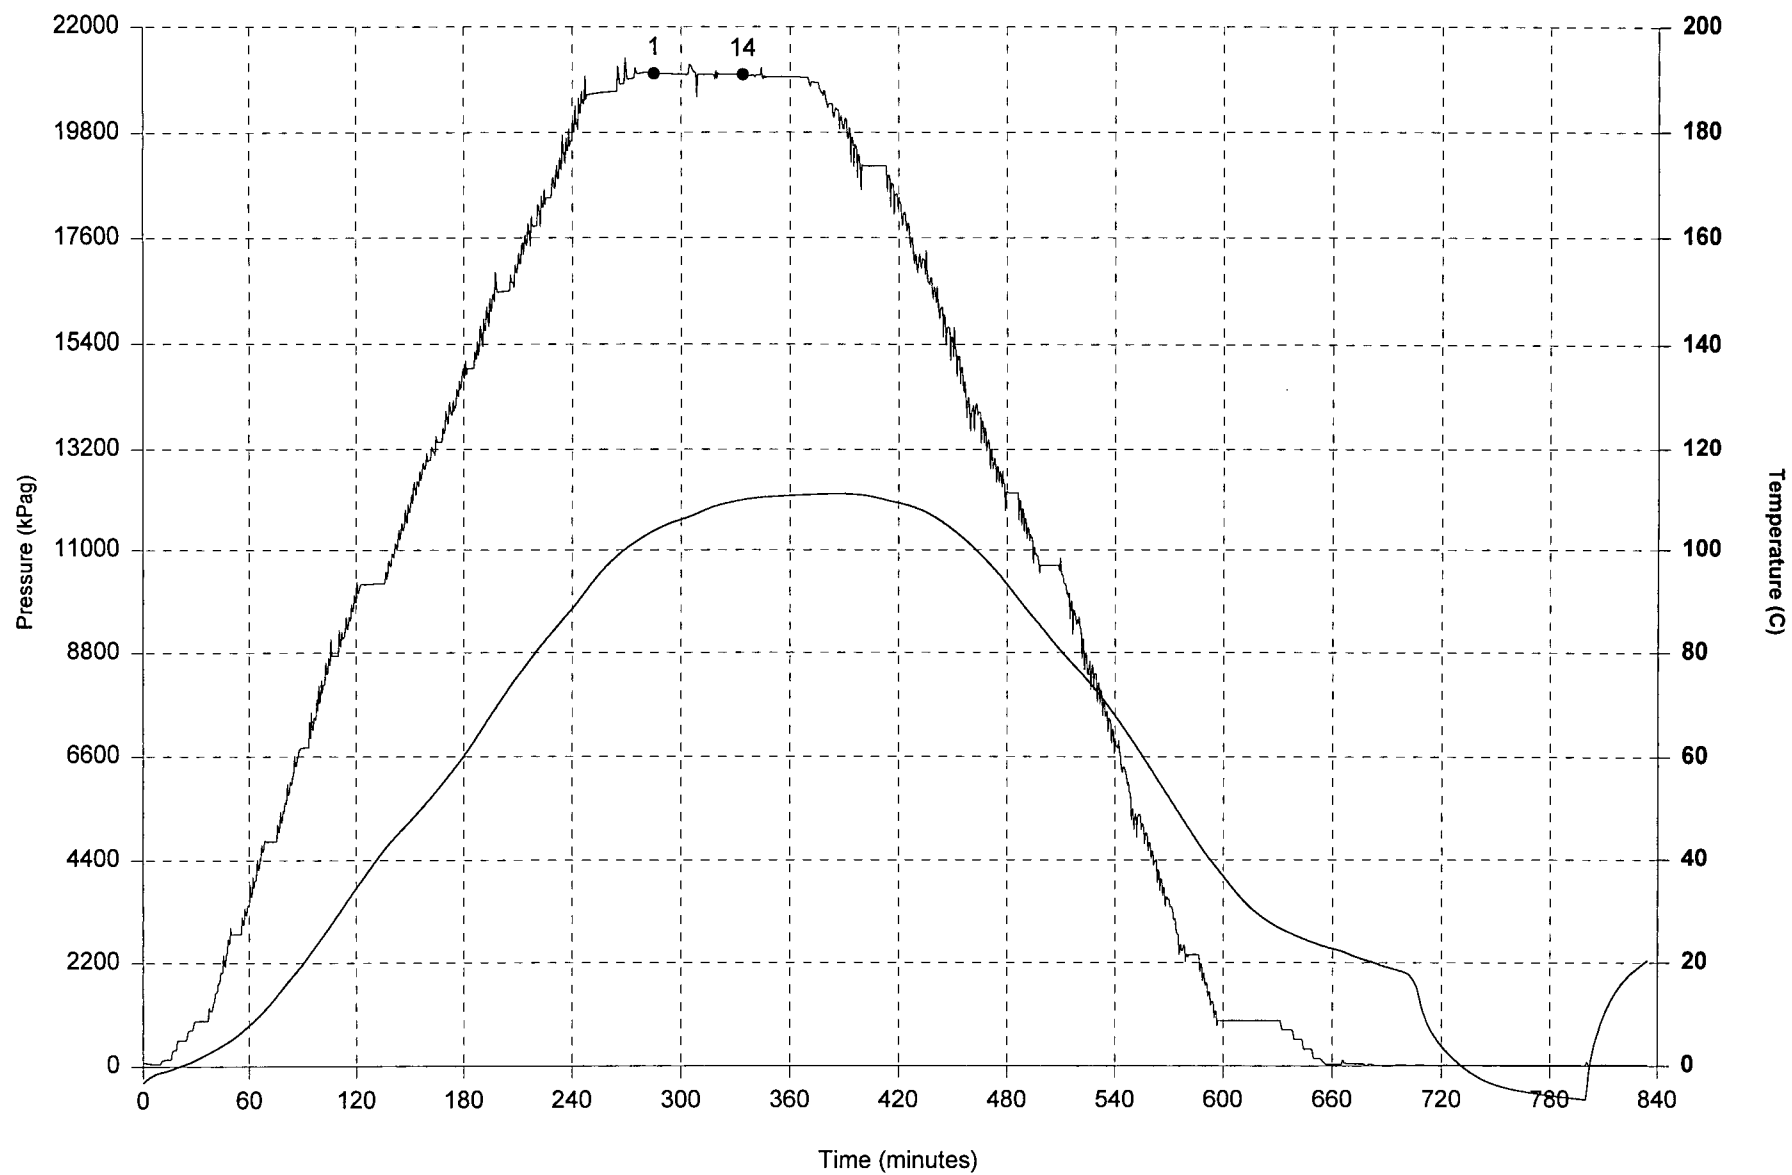

PARAMOUNT ET AL NETLA M-23
00/ 60.404 / 126.263 /0
DST #: 2
Recorder: M77

Recovery recorder

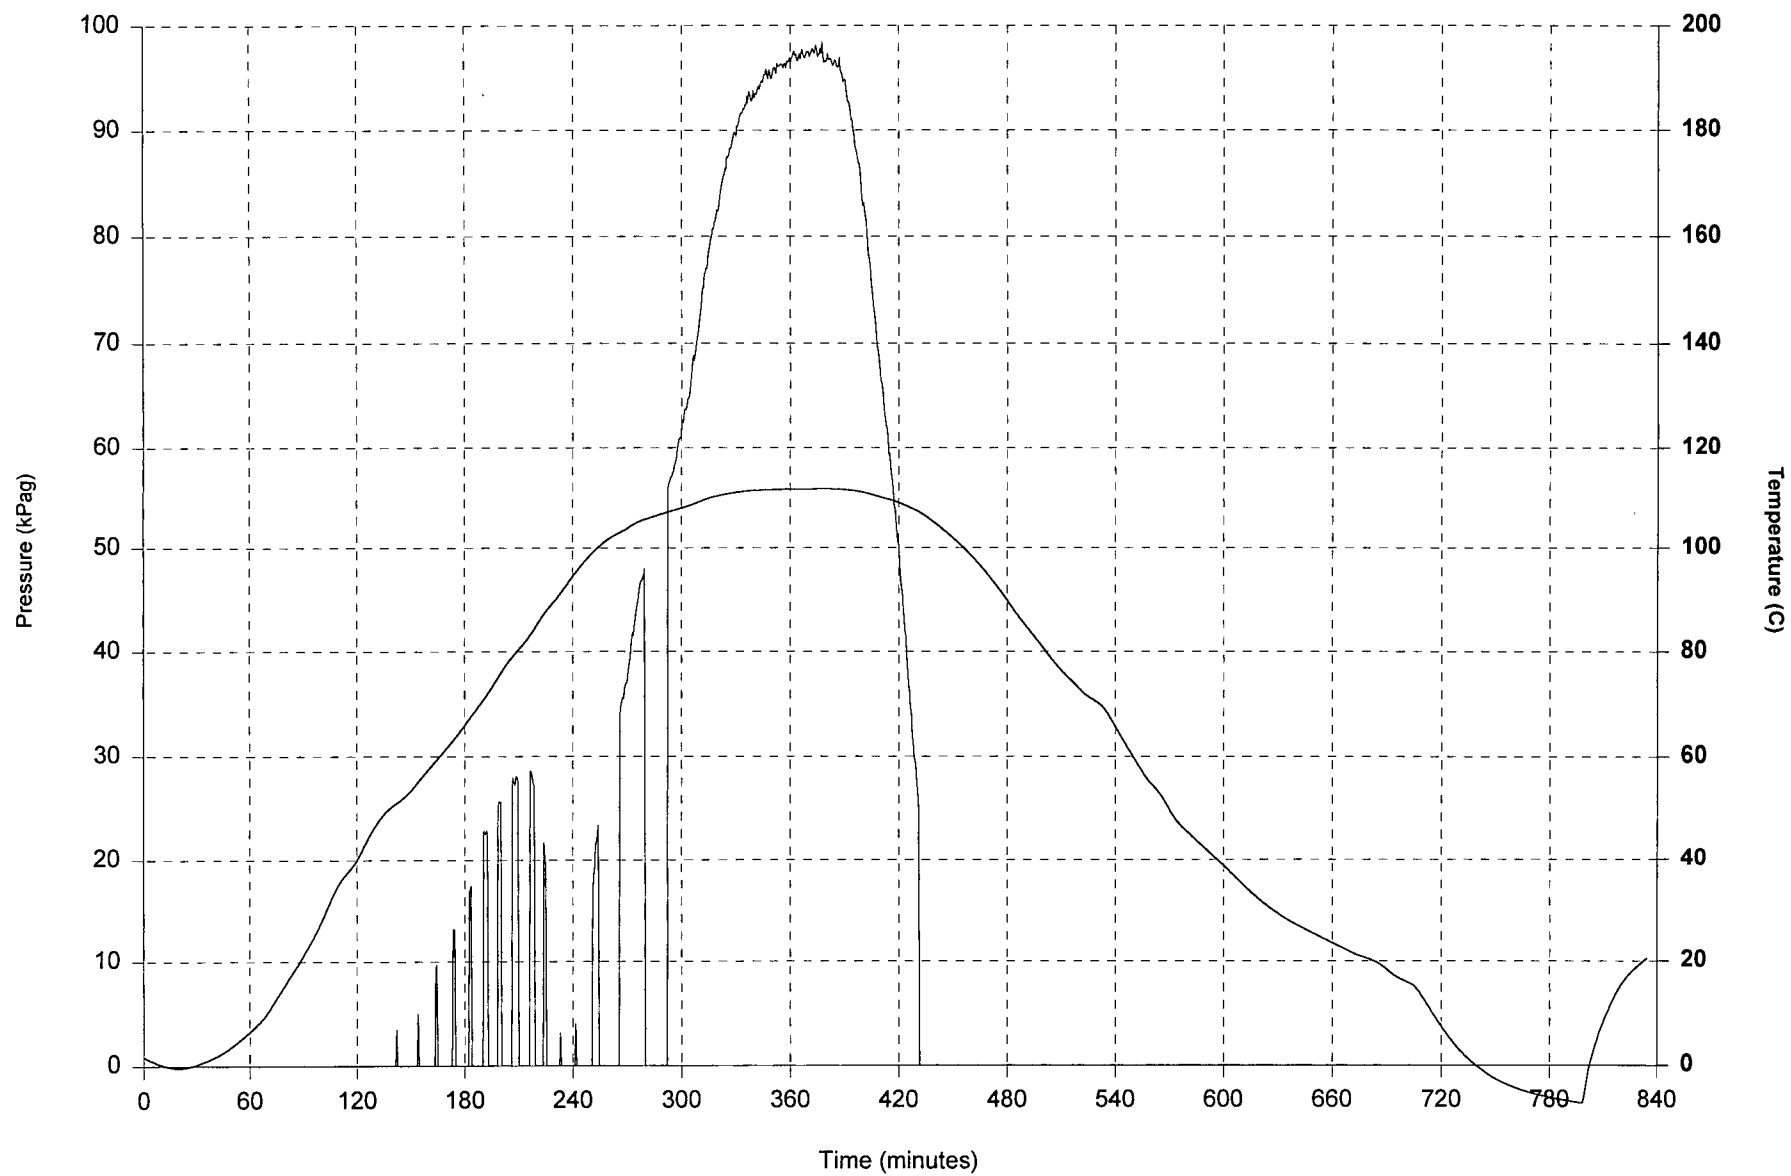

PARAMOUNT ET AL NETLA M-23
00/ 60.404 / 126.263 /0
DST# 2

General Information:

Operator: Paramount Resources Ltd.
4000, 350 - 7th Avenue S.W.
Calgary Alberta T2P 3W5

Licence#: 1835

Tester: Allan B

Ticket#: 808882

Reverse Circulated? N

KB Elevation: 278.25 meters

Ground Elevat'n: 273.10 meters

Total Depth: 2,280.00 meters

Mud Data:

Weight: 1020 kg/m3

Type: Invert

Viscosity: 43 s/l

Hole Data:

Drilled Hole Size: 200 mm

Hole Condition at Test Time: Good

Conditioned prior to this test? Y

Recorder Summary:


<i>Recorder#</i>	<i>Type</i>	<i>Position</i>	<i>Capacity</i>	<i>Units</i>	<i>Depth</i>	<i>Comments</i>
M77	ZI	Inside	34500	kPag	2,036.00	Recovery recorder
22568	K-3	Outside	45700	kPag	2,050.00	
N60	ZI	Outside	34500	kPag	2,050.00	

Distributions:

Reports Sent To: Wayne Tomm

PARAMOUNT ET AL NETLA M-23
00/ 60.404 / 126.263 /0
DST# 2

Tool Sequence:

<i>Diagram</i>	<i>Description</i>	<i>Length</i>
	Pump Out Sub	0.33 m
	Drill Pipe	0.30 m
	Pump Out Sub	0.33 m
	Recorder Carrier	1.38 m
	Hydraulic Tool	1.50 m
	Bottom Hole Sampler	1.03 m
	Recorder Carrier	1.38 m
	Hydraulic Jars	2.22 m
	Safety Joint	0.65 m
	Inflate Pump	2.38 m
	Screen	1.16 m
	Top Inflate Packer	1.78 m
	Packer Stick Down	0.82 m
	Port Sub	0.42 m
	Recorder Carrier	2.06 m
	Cross Over Sub	0.30 m
	Drill Collar	28.21 m
	Cross Over Sub	0.30 m
	Packer Stick Up	0.42 m
	Bottom Inflate Packer	1.90 m
	Perforations	0.61 m
	Belly Spring	2.00 m

Tool String Length: 51.48 m
Drill Collar I.D.: 56 mm 86.25 m
Drill Pipe O.D.: 102 mm 1,952.37 m


Collar Pipe Total: 2,038.62 m

Stick Up: 5.06 m
Tool Above: 14.44 m
Interval Tested: 32.00 m

Bottom Hole Choke Size: 25.40 mm

PARAMOUNT ET AL NETLA M-23
00/ 60.404 / 126.263 /0
DST# 2

Recorder# 22568

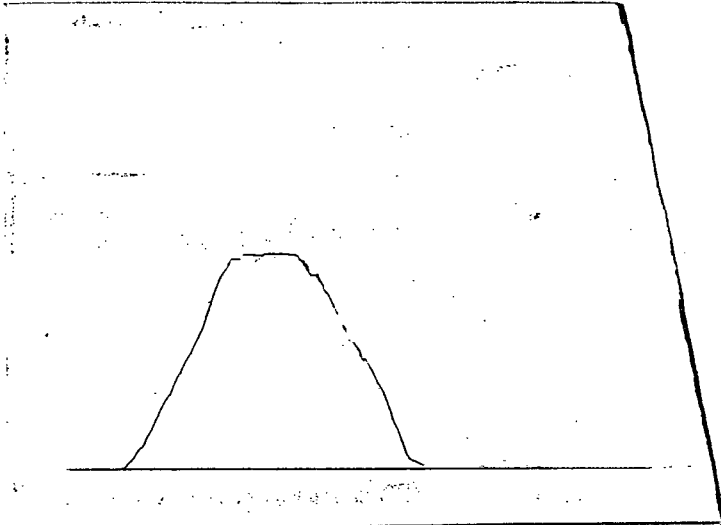

Recorder Type: K-3

Capacity: 45,700 kPag

		Pressure (kPag)	Time (min)
1	Initial Hydrostatic	20829	
14	Final Hydrostatic	20829	

Recorder# M77

Depth: 2,036.00 m


Temperature: 112.6 C

Location: Inside

Recorder Type: ZI

Capacity: 34,500 kPag

Comments: Recovery recorder

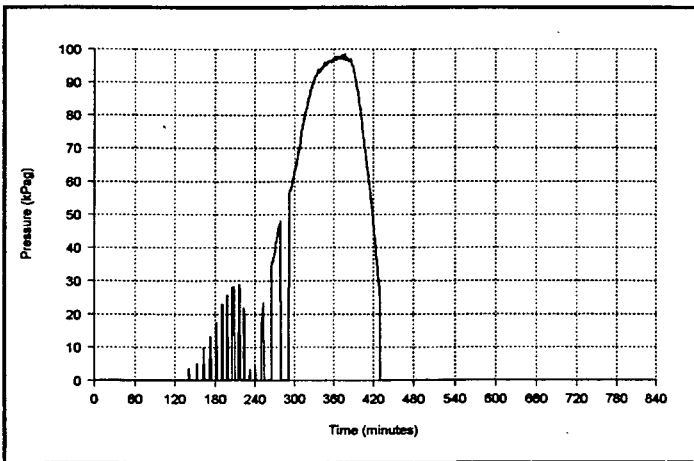

PARAMOUNT ET AL NETLA M-23

00/ 60.404 / 126.263 /0

DST# 2

Recorder# N60


Depth: 2,050.00 m

Temperature: 110.9 C

Location: Outside

Recorder Type: ZI

Capacity: 34,500 kPag

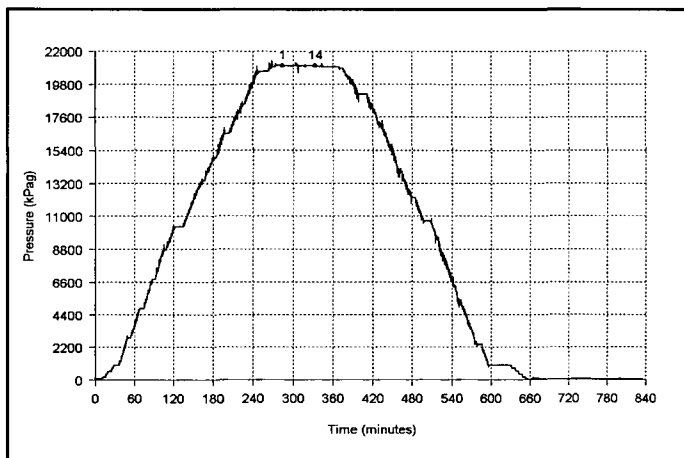

		Pressure (kPag)	Time (min)
1	Initial Hydrostatic	21022	
14	Final Hydrostatic	21000	