


PARAMOUNT ET AL LIARD F36

Perforations

See Baker Diagram Dated March 14/99 For Final Completion String

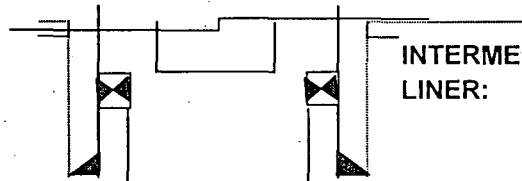

INTERMEDIATE CASING: 177.8 mm, 34.23 kg/m
LINER: 114.3 mm, 17.26 kg/m, L80 landed at
2108.25 m KB. Cement top 1462 m

PERFORATIONS

21 gram HMX
20 SPM, 60 degree

1514 - 15
1520 - 26
1530 - 40
1541 - 50
1551 - 57
1558 - 69
1569.5 - 71.5
1572.5 - 74.5
1576 - 82

1600 - 02
1602.5 - 05
1608 - 11
1615 - 1638

1644 - 45
1648 - 57
1659 - 63
1668 - 73
1675 - 86
1697 - 1701
1704.5 - 11
1719 - 24
1751 - 61
1769 - 73


1786 - 90
1792 - 94
1805 - 09
1811 - 13
1834 - 38.5
1840 - 43
1846 - 48
1850 - 62
1863 - 67
1869 - 74
1888 - 89.5
1896.6 - 97.7
1900 - 05.5
1933 - 34.5
1941 - 45

1984 - 88
1990.5 - 93
1996 - 99.5
2006 - 08
2044.5 - 46

PLUG BACK
TOTAL DEPTH

2092
2110

See Baker Diagram Dated March 14/99 For Final Completion String



21 gram HMX
20 SPM, 60 degree

1514 - 15
1520 - 26
1530 - 40
1541 - 50
1551 - 57
1558 - 69
1569.5 - 71.5
1572.5 - 74.5
1576 - 82

1600 -02
1602.5 - 05
1608 - 11
1615 - 1638

1644 - 45
1648 - 57
1659 - 63
1668 - 73
1675 - 86
1697 - 1701
1704.5 - 11
1719 - 24
1751 - 61
1769 - 73

1786 - 90
1792 - 94
1805 - 09
1811 - 13
1834 - 38.5
1840 - 43
1846 - 48
1850 - 62
1863 - 67
1869 - 74
1888 - 89.5
1896.6 - 97.7
1900 - 05.5
1933 - 34.5
1941 - 45

1984 - 88
1990.5 -93
1996 - 99.5
2006 - 08
2044.5 - 46

wellbore.xls6/11/99