


PARAMOUNT ET AL FORT LIARD A-01

(As at March 22, 2000)

All depths in mKB.

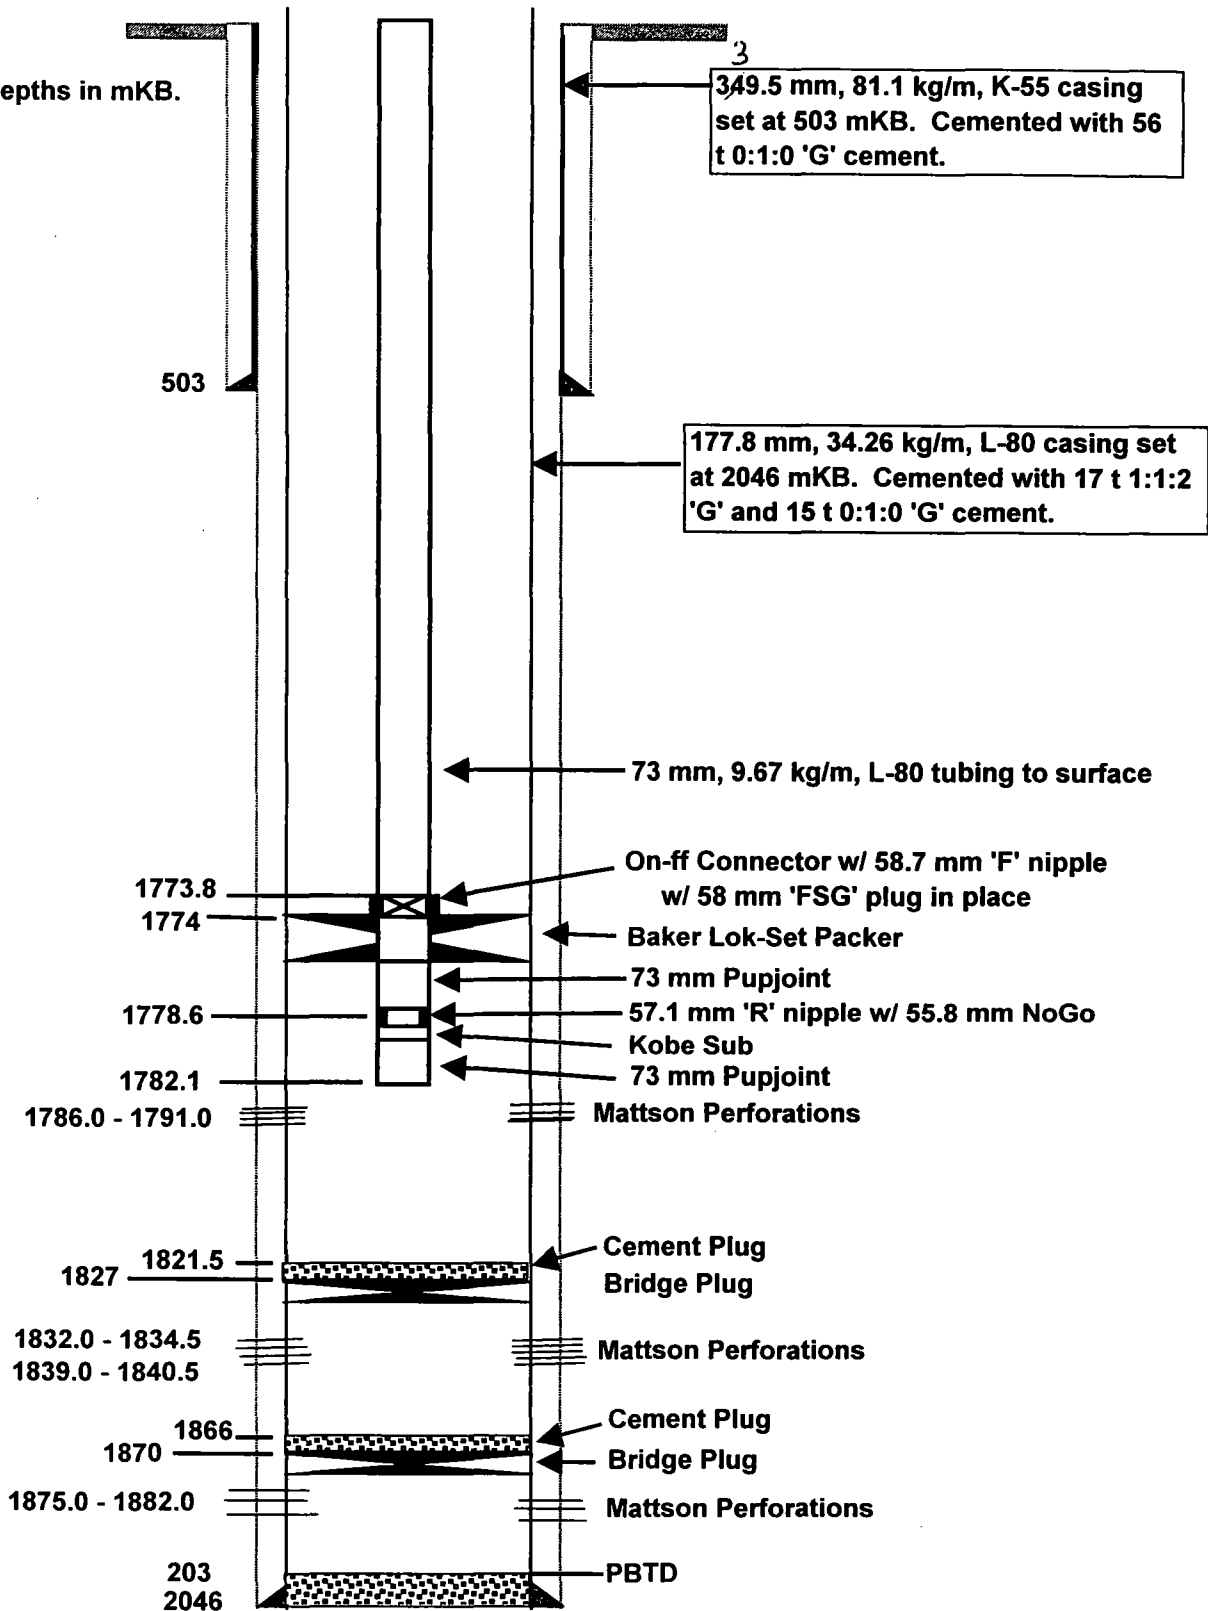

Paramount et al Arrowhead N-65
60° 40' N, 122° 45' W

Casing and Cementing Summary

Surface Casing:

339.7 mm, 81.1 kg/m, J-55 casing set at 480 mKB.

Cemented with 32.0 t 0:1:0 'G' + 1% CaCl₂ and 29.0 t 0:1:0 'G' + 2% CaCl₂.

Intermediate Casing:

244.5 mm, 64.74 kg/m, L-80 casing set at 1890.0 mKB.

Cemented with 29 t LW-14 + 2% SMS + 2% LWA + 2% CaCl₂ and 43 t 0:1:0 'G' + 0.4% CFL-3 + 0.1% CFL-H + 0.2% SPC-2.

Liner #1:

177.8 mm, 38.69 kg/m, N-80 casing run from 1723 - 2529 mKB.

Cemented with 19.5 t Thermal 40 + 1% CFR + 0.35% CFL-2 + 0.35% CFL-H + 0.8% HTR-B + 1.3% LTR.

Liner #2:

139.7 mm, 25.3 kg/m, L-80 casing run from 2300 - 2856 mKB.

Cemented with 40.7 t Thermal 40 + 1% CFR + 0.8% CFL-2 + 1.2% LTR + 0.7% HTR-B.