

PARAMOUNT ET AL CAMERON N-28

Bottom Hole Diagram (as of March 13, 2002)

KB: 764.1 m
GL: 760.1 m

200 mm hole to 1590 mKB


139.7 mm, 23.1 kg/m, IK-55, LT&C casing set from 732 to 1590.5 mKB.
Cemented with 35.6 t 0:1:4 + 0.75% T-10 and 29.0 t 'G' + 0.8% NFL-3 + 0.1% SPC12000.

381 mm hole to 244 mKB.

298.5 mm, 62.5 kg/m, H-40, ST&C casing set at 203.3 mKB.
Cemented to surface with 28 t class 'A' plus 2% CaCl₂.

269.8 mm hole to 834 mKB

219.1 mm, 35.7 kg/m, IK-55, ST&C casing set at 834.2 mKB.
Cemented with 18 t 0:1:8 + 0.75% T-10 and 14.3 t 0:1:0 'G' + 0.8% NFL + 0.1% SPC12000.

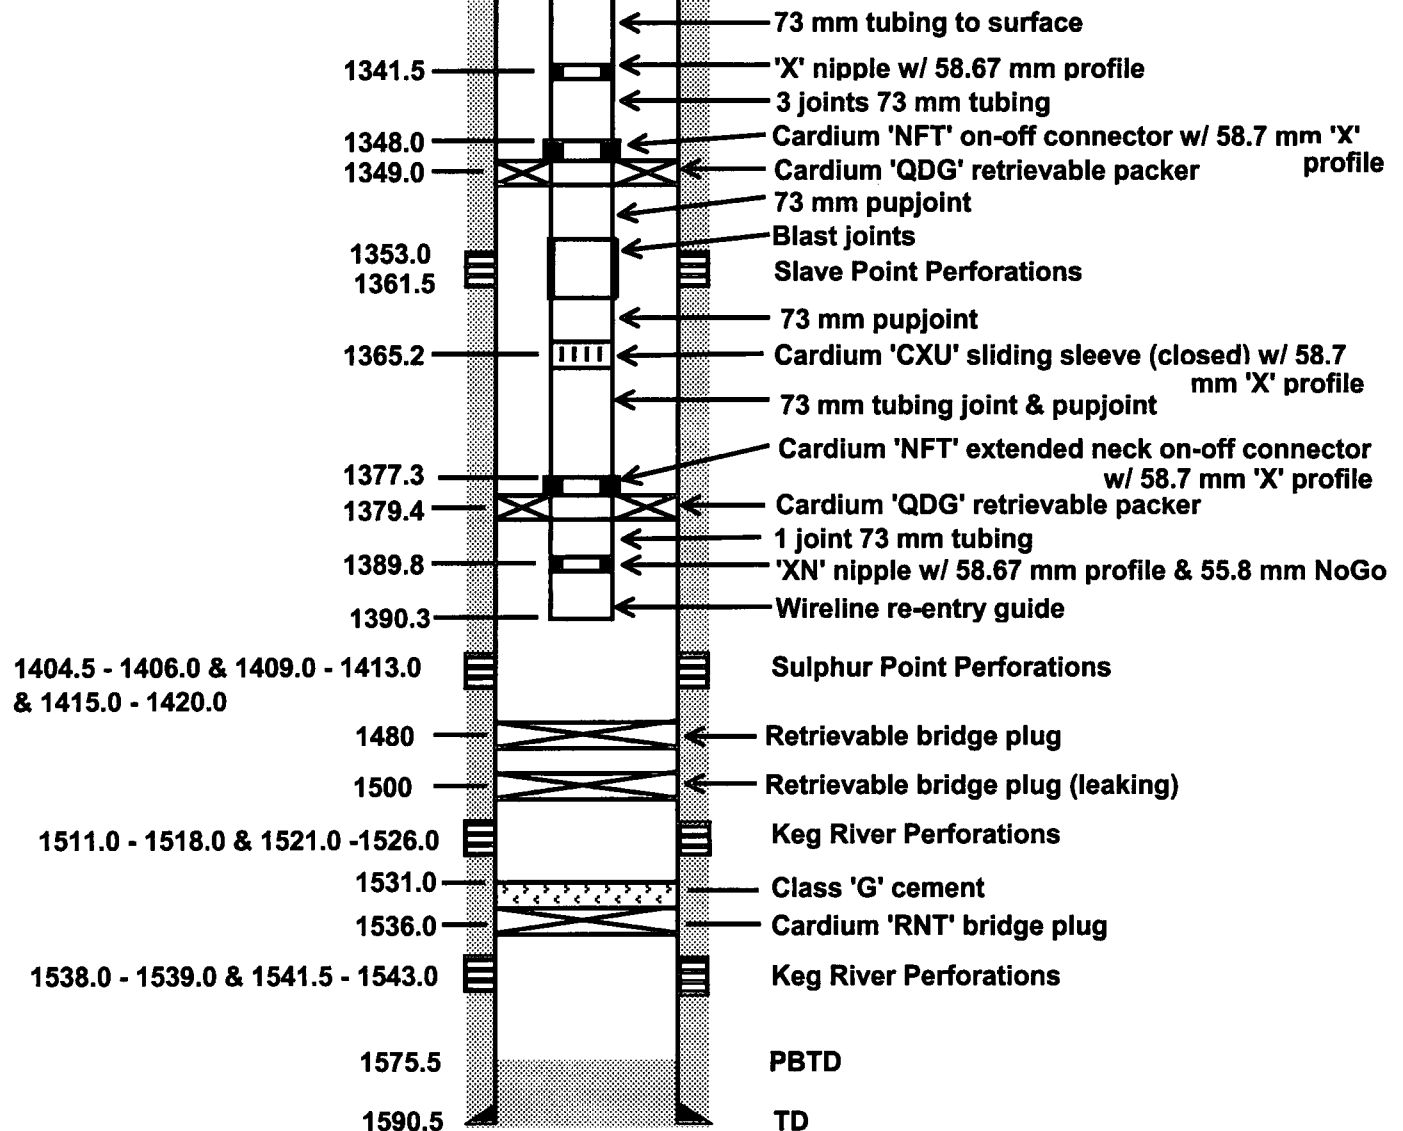

PARAMOUNT ET AL CAMERON N-28

Bottom Hole Diagram (as of March 13, 2002)

KB: 764.1 m
GL: 760.1 m

200 mm hole to 1590 mKB

139.7 mm, 23.1 kg/m, IK-55, LT&C casing set from 732 to 1590.5 mKB.
Cemented with 35.6 t 0:1:4 + 0.75% T-10 and 29.0 t 'G' + 0.8% NFL-3 + 0.1% SPC12000.

381 mm hole to 244 mKB.

298.5 mm, 62.5 kg/m, H-40, ST&C casing set at 203.3 mKB.
Cemented to surface with 28 t class 'A' plus 2% CaCl₂.

269.8 mm hole to 834 mKB

219.1 mm, 35.7 kg/m, IK-55, ST&C casing set at 834.2 mKB.
Cemented with 18 t 0:1:8 + 0.75% T-10 and 14.3 t 0:1:0 'G' + 0.8% NFL + 0.1% SPC12000.

