




HALLIBURTON

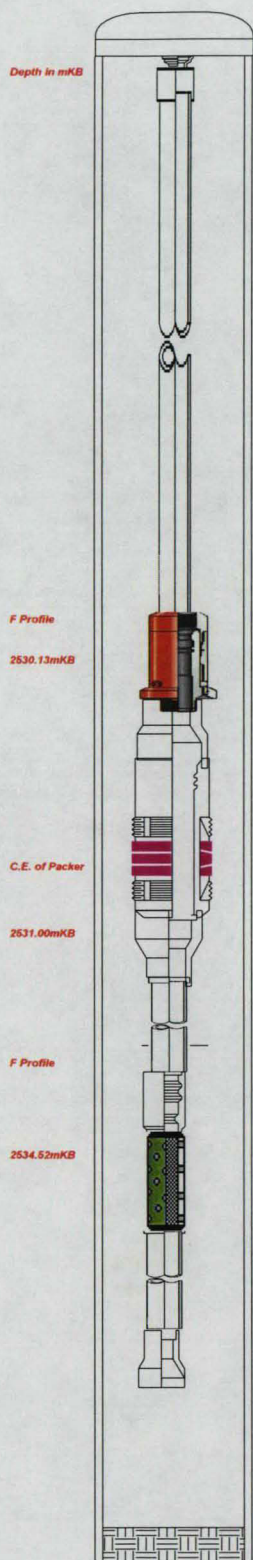

				S.O. #	2290339	
ANADARKO CANADA ENERGY				250 261 4889	3/12/2003	
JOE GRAVES				LIARD	LIARD C-55	
				NWT	Packer	
<----- 1	Tubular	Size mm	Weight & Grade kg/m	Thread	Depth mKB	I.D. mm
<----- 2	Casing	177.80	38.7kg/m L-80	LT&C	2546.56	159.41
<----- 3	Liner	0.00	0.00			
<----- 4	Tubing	88.90	13.84kg/m L-80	553CB	2529.46	76.00
<----- 5	Tubing	60.33	6.99kg/m L-80	553CB	2567.63	50.67
<----- 6	Weights	Initial String WT	Transfer Weight	Slackoff WT	Hole Drag	
	DaN			6000daN		
	Fluids	Fluid Type	Fluid WT kg/m3	Spec. Grav.	Pressure tested	Hydrostatic
	Tubing				MPA	
<----- 7	Annulus	Water	1000.00	1.00	15 MPA	
	Data	Kickoff Depth	Deviation Angle	H2S	Co2	BHT
			7.00	0.10%	20%	125C
	Perfs					
	Collars	2527m				
	Item	Description	I.D. mm	O.D. mm	Length m	Top depth mKB
		KB to THF	N/A	N/A	5.39	-5.39
		Wireline Correction	N/A	N/A	-2.30	5.39
	1.	Dognut	76.00	N/A	0.30	3.09
<----- 8	2.	Pup Joint 88.90mm Hydril 553CB L-80 13.84kg/m Pin x Pin	76.00	88.90	0.43	3.39
	3.	Joint 88.90mm Hydril 553CB L-80 13.84kg/m	76.00	88.90	8.92	3.82
	4.	Pup Joint 88.90mm Hydril 553CB L-80 13.84kg/m	76.00	88.90	1.74	12.74
<----- 9	5.	Pup Joint 88.90mm Hydril 553CB L-80 13.84kg/m	76.00	88.90	1.74	14.48
	6.	Pup Joint 88.90mm Hydril 553CB L-80 13.84kg/m	76.00	88.90	2.35	16.22
<----- 10	7.	265 Joints 88.90mm Hydril 553CB L-80 13.84kg/m	76.00	88.90	2511.38	18.57
<----- 11	8.	177.80mm Halliburton Overshot w/ Aflas Seals Impreglon 222M Coated ID/OD c/w 47.63mm Baker 'F' Profile (plug in place)	47.63	139.40	0.70	2529.95
<----- 12	9.	177.80mm 34.23-56.55kg/m Halliburton BWC Permanent Packer w/ Aflas Elements Impreglon 222M Coated (top to CE 0.35m)	82.55	144.17	0.78	2530.65
	10.	BWC Tubing Adapter c/w 60.33mm Hydril 553CB Pin down Impreglon 222M Coated	50.67	108.80	0.11	2531.43
<----- 13	11.	60.33mm Hydril 553CB L-80 Pup Joint Impreglon 222M Coated 6.99kg/m	50.67	60.33	2.98	2531.54
	12.	60.33mm Hydril 553CB Landing Nipple c/w 45.97mm Baker 'F' Profile Impreglon 222M Coated	45.97	70.25	0.28	2534.52
<----- 14	13.	60.33mm Hydril 553CB L-80 Joint Impreglon 222M Coated; 6.99kg/m; Top 3.0m Perforated	50.67	60.33	9.58	2534.80
	14.	60.33mm Hydril 553CB L-80 Wireline Re-entry Guide w/ 45.49mm No-Go Impreglon 222M Coated	45.47	82.17	0.20	2544.38
						2544.58
	Directions:					