

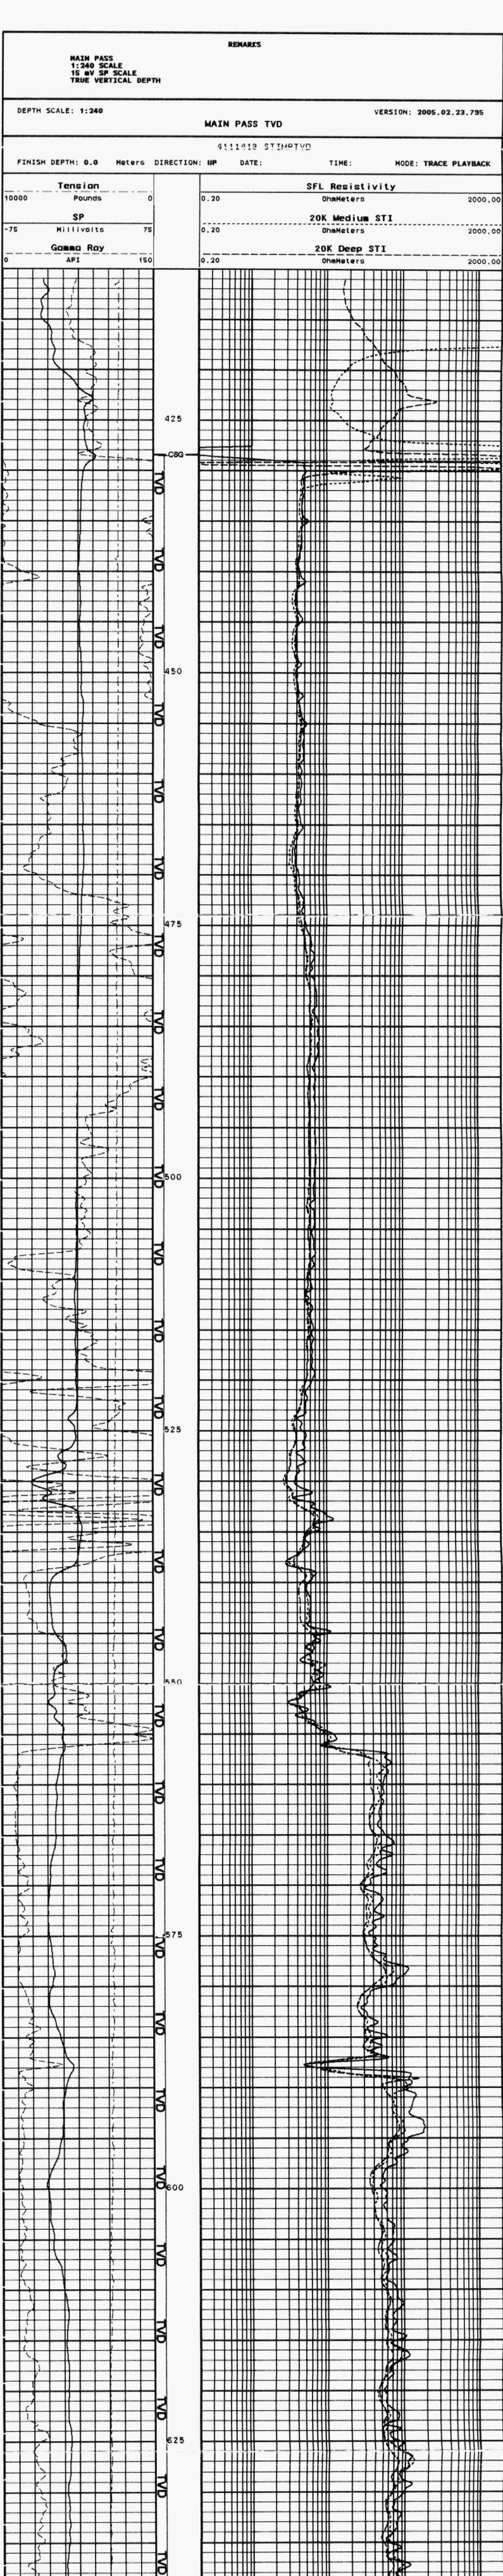
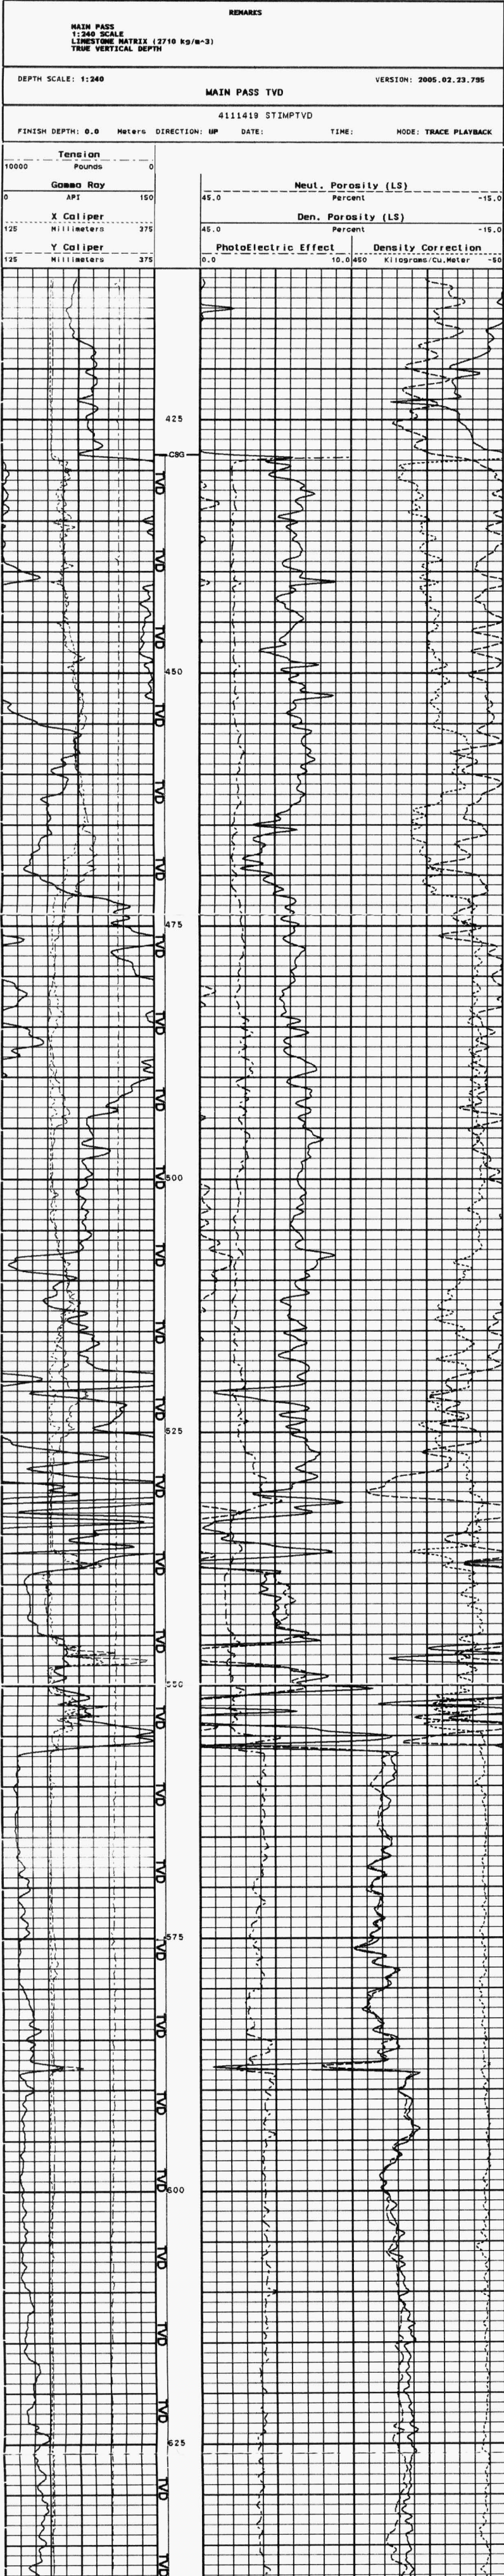
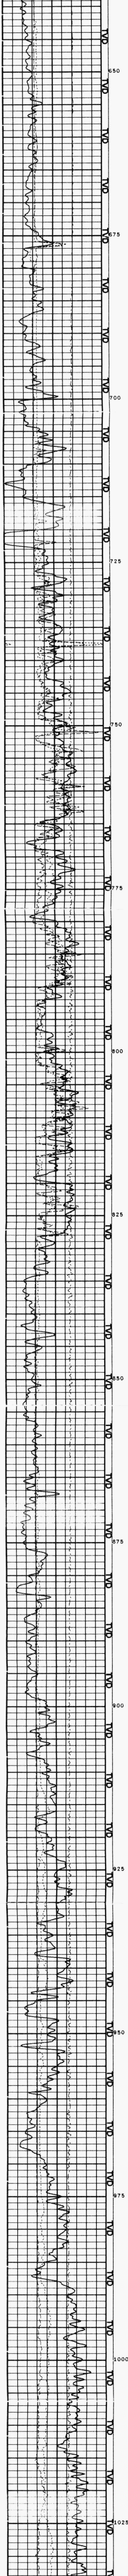
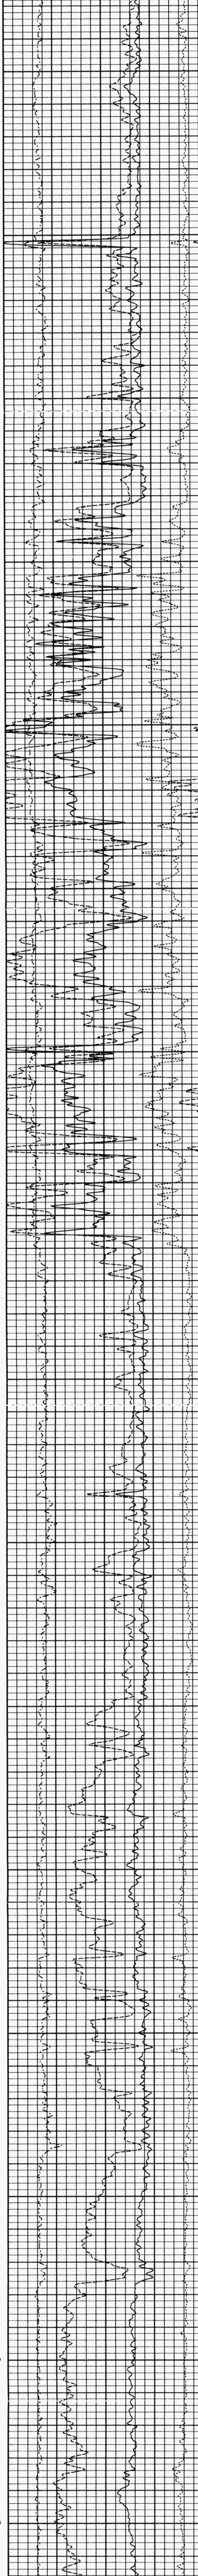







PROVINCE	NORTHWEST TERRITORIES
FIELD	CAMERON HILLS
WELL	PARA ET AL CAMERON 2M-73
COMPANY	PARAMOUNT RESOURCES LTD.
LOCATION	M-73
LICENCE	2026
Perm. Datum	GROUND LEVEL Elev. 771.80 m
Log measured from	KB, 4.25 m above Permanent Datum.
Other Services: SPED/CNT/UGR/DAC HBC/UGR MRT/UGR	ELEV. K.B. 776.05 m G.L. 771.80 m CBF -----
DATE	26-MAR-2005
Run No.	ONE
First Reading	1519.7 m
Lost Reading	428.5 m
Meters Meas.	1091.2 m
Depth Reached	1521.8 m
Bot. Driller	1522.0 m
CS9. Logger	428.5 m
Fluid Type	GEL CHEMICAL
Dens. & Visc.	1130 74
Mud PH	11.0
Mud Water Loss	8.0
Mud Res. @ BHT	0.7 @ 17 °C
Rmf @ BHT	0.8 @ 16 °C
Rmc @ BHT	0.6 @ 17 °C
Rmf @ BHT	0.3 @ 58 °C
Rmc @ BHT	0.3 @ 58 °C
Bit Size	200.0 mm
Spacing	N/A
Operating Time	5.5 HRS
Unit #	349
Location	GRANDE PRAIRIE OH
Recorded By	K. POSTON
Witnessed By	P. DANG



All interpretations of log data are opinions based on inferences from electrical or other measurements. We do not guarantee the accuracy or correctness of any interpretation or recommendation and we shall not be liable or responsible for any loss, cost, damages or expenses incurred or sustained by anyone resulting from any interpretation or recommendation made by any of our employees or agents.

REMARKS	Rig: PD #247	Service Order # 4111419			
Drilling Stopped 09:30/ 26 Circulation Stopped 21:30/ 26 Tool on Bottom 02:45/ 27 BHT 58 °C					
- STI-SP/SPED/CNT/UGR/MRT/HBC/DAC LOGGED IN COMBINATION					
- MAXIMUM DEVIATION OF 27.4° @ 915m, WITH A KICKOFF OF 470m					
- CALIPERS HAD TO BE CLOSED BRIEFLY ON THE MAIN PASS FOR 1.5m @ 1516m					
- ORINATION WAS DIFFICULT TO MAINTAIN THROUGH THE DEVIATED HOLE, SEVERAL PASSES WERE ATTEMPTED TO CORRECT					
Prints: 1					
CHANGES IN MUD TYPE OR NEW SAMPLE					
Date	Sample No.	Type Log	Interval	Scale	
Depth - Driller					
Type Fluid in Hole					
Dens.	Visc.				
pH	Water Loss				
Source of Sample					
Rm @ Meas. Temp.	@ °C	Run No.	Tool Type	Tool No.	Other
Rmf @ Meas. Temp.	@ °C	ONE	STI-AC	113-113	38mm STANDOFFS
Rmc @ Meas. Temp.	@ °C		UGR-JB	191	RA-20S-075
Source Rmf	Rmc				
Rm @ BHT	@ °C				
Rmf @ BHT	@ °C				
Rmc @ BHT	@ °C				

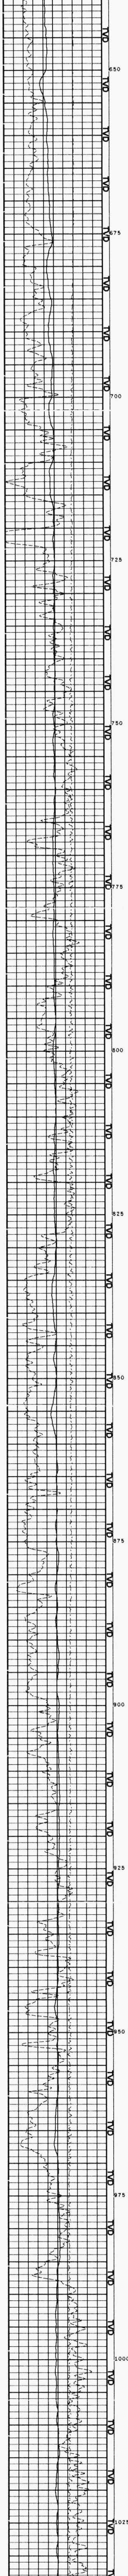

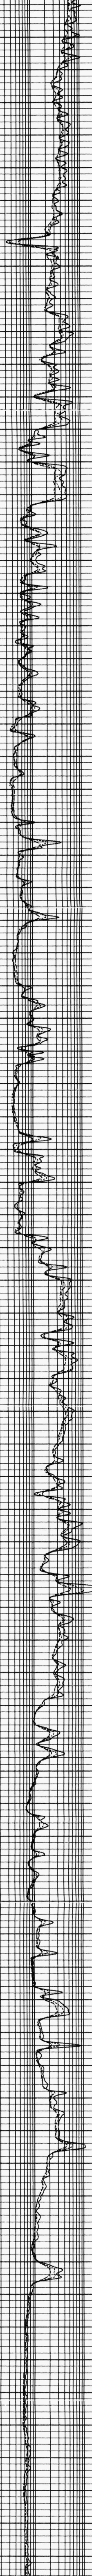

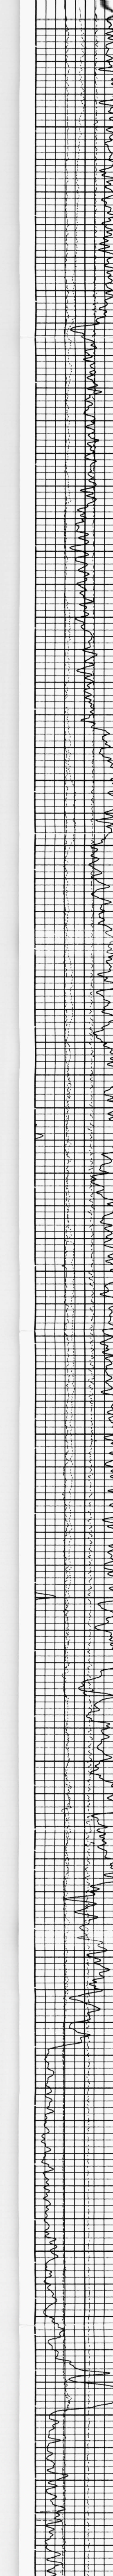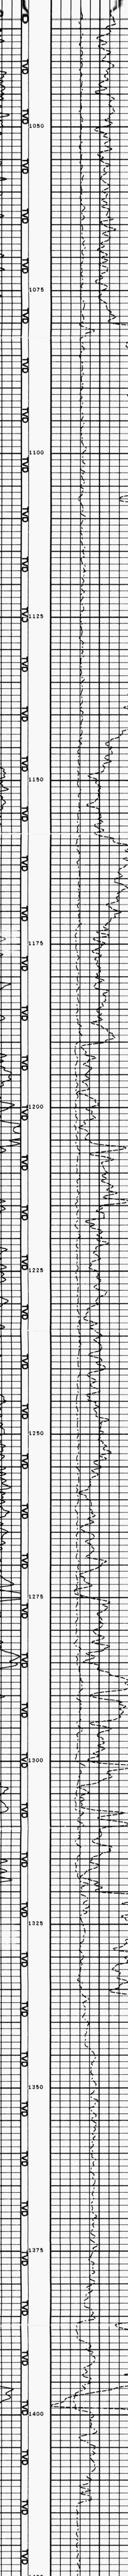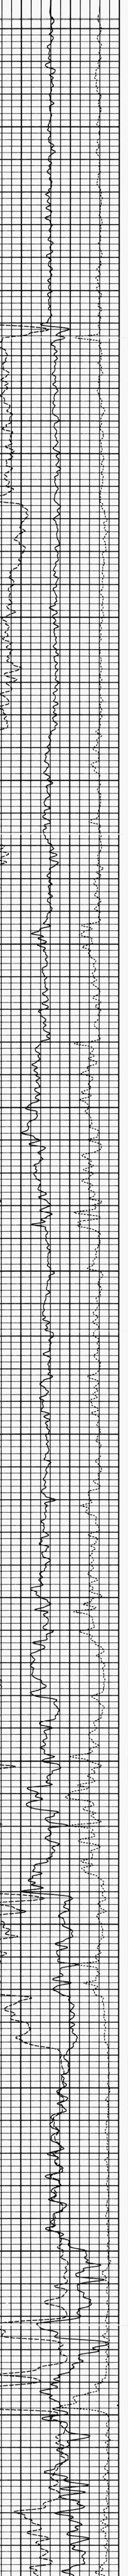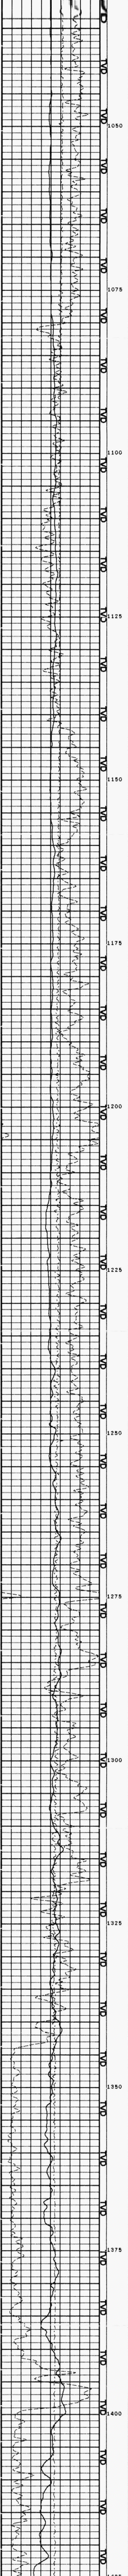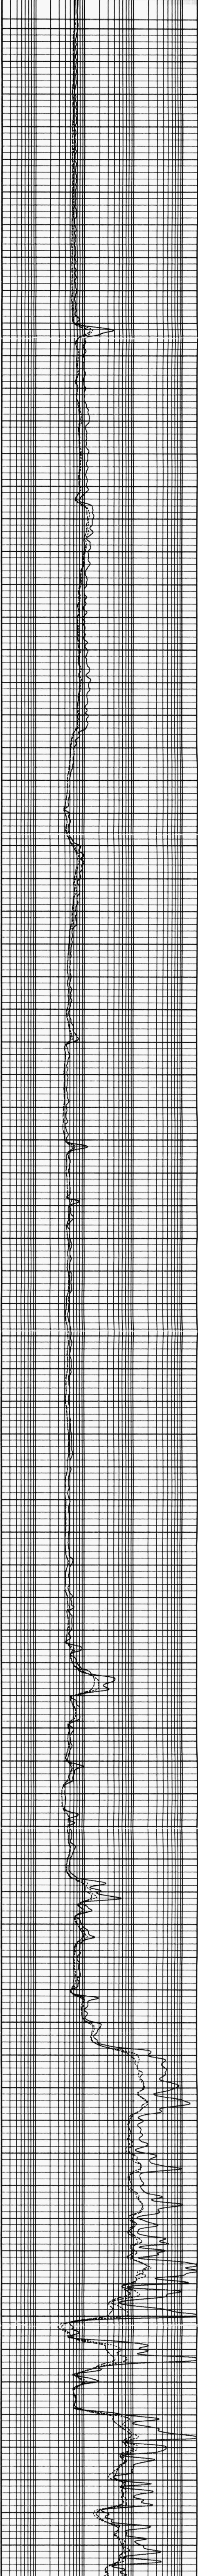

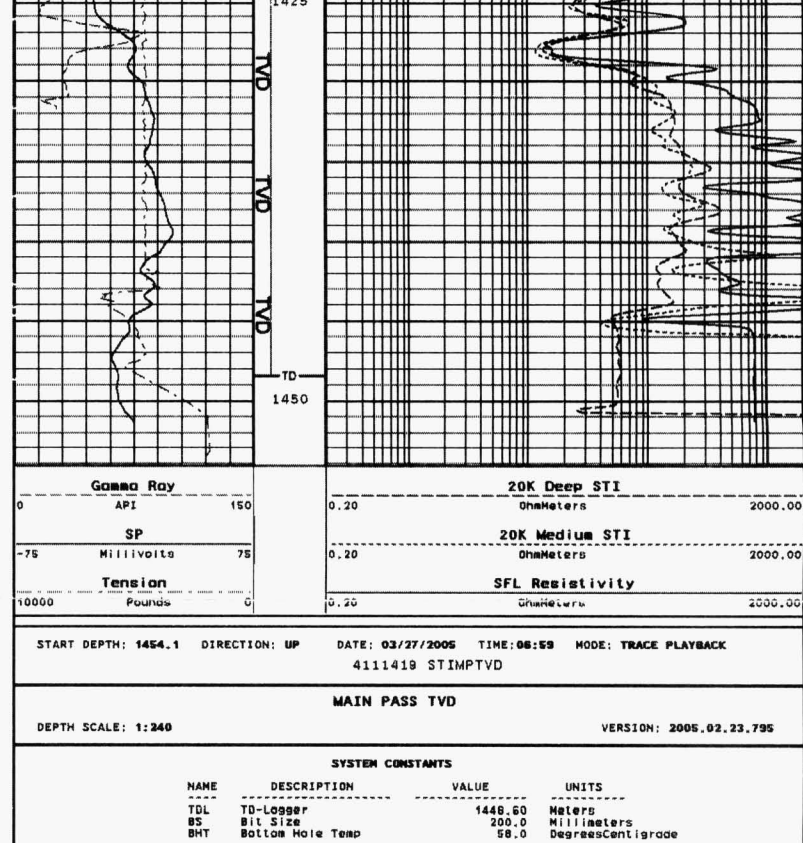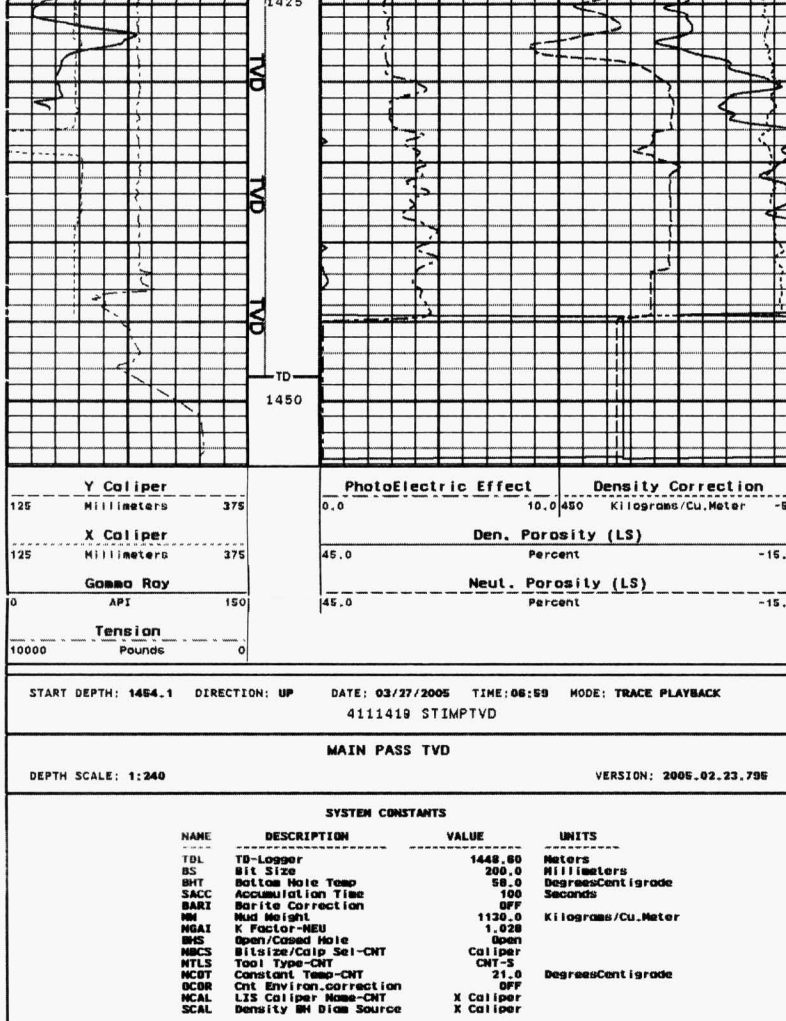



TVD CALCULATION SUMMARY

CALCULATION METHOD : Minimum Curvature
TVD DATA FILE : /u/os9-port/cs400/8000/4111419/tvd.tvdb
VERSION : 1.0
COMPANY : PARAMOUNT RESOURCES LTD.
WELL : PARA ET AL CAMERON 2M-73
LOCATION : M-73
DATE : 26-MAR-2005
DRILLED DEPTH : 1522.00 m
TRUE VERTICAL DEPTH : 1448.82 m
BOTTOM HOLE DISPLACEMENT : N 21.57 m W 369.23 m
TARGET DISPLACEMENT : N 0.00 m E 0.00 m

STATION NUMBER	MEASURED DEPTH (M)	INCLINATION ANGLE (DD)	AZIMUTH (DD)	VERTICAL DEPTH (M)	NORTH +ve (M)	EAST +ve (M)
TIE	0.00	0.00	0.00	0.00	0.00	0.00
1	435.44	1.13	72.93	435.41	1.26	4.10
2	445.04	1.00	75.31	445.01	1.31	4.28
3	454.70	0.56	29.81	454.67	1.37	4.38
4	464.11	1.56	313.56	464.08	1.50	4.31
5	473.64	3.31	302.56	473.60	1.74	3.99
6	483.32	4.75	294.18	483.25	2.05	3.38
7	492.68	5.94	293.31	492.57	2.40	2.59
8	502.48	6.88	295.31	502.31	2.85	1.59
9	512.19	7.69	295.06	511.94	3.38	0.48
10	521.60	8.31	290.06	521.26	3.88	-0.73
11	531.35	9.00	281.56	530.90	4.27	-2.14
12	541.02	10.25	276.81	540.44	4.53	-3.74
13	550.70	12.00	276.56	549.93	4.74	-5.59
14	560.41	13.31	276.68	559.41	4.99	-7.71
15	570.08	13.75	276.18	568.81	5.24	-9.95
16	579.68	13.88	275.06	578.13	5.47	-12.24
17	589.08	13.81	273.68	587.26	5.64	-14.48
18	598.74	13.81	271.81	596.64	5.75	-16.78
19	608.43	14.13	269.68	606.04	5.78	-19.12
20	617.91	14.69	268.06	615.22	5.73	-21.48
21	627.56	15.25	265.93	624.55	5.60	-23.97
22	637.29	16.13	264.06	633.91	5.37	-26.59
23	646.89	17.44	263.93	643.11	5.08	-29.35
24	656.34	19.06	264.81	652.08	4.79	-32.29
25	665.94	20.38	266.06	661.12	4.53	-35.52
26	675.59	21.19	268.06	670.14	4.36	-38.94
27	684.84	22.06	269.18	678.74	4.28	-42.35
28	694.31	22.50	269.81	687.50	4.24	-45.94
29	704.05	22.38	269.81	696.50	4.23	-49.65
30	713.59	22.44	270.56	705.32	4.24	-53.29
31	723.21	22.50	270.93	714.21	4.29	-56.97
32	732.84	22.63	271.18	723.10	4.36	-60.66
33	742.50	22.44	272.43	732.03	4.48	-64.36
34	752.10	22.75	274.56	740.89	4.70	-68.04
35	761.62	23.31	275.81	749.65	5.04	-71.75
36	771.28	23.81	275.93	758.51	5.43	-75.59
37	780.89	23.69	275.68	767.30	5.83	-79.44
38	790.50	23.06	274.81	776.12	6.17	-83.24
39	800.23	22.31	273.56	785.10	6.45	-86.98
40	809.87	22.00	271.81	794.03	6.62	-90.61
41	819.46	22.25	271.31	802.91	6.72	-94.22
42	829.16	22.69	271.18	811.88	6.80	-97.93
43	838.92	22.56	270.81	820.89	6.86	-101.68
44	848.43	22.63	271.18	829.67	6.93	-105.34
45	858.01	23.94	271.68	838.47	7.02	-109.12
46	867.54	25.06	272.06	847.14	7.15	-113.07
47	877.09	26.00	272.43	855.75	7.31	-117.19
48	886.58	25.88	272.06	864.29	7.48	-121.33
49	896.24	25.81	271.18	872.98	7.59	-125.54
50	905.87	26.31	272.18	881.63	7.72	-129.77
51	915.60	27.38	273.31	890.31	7.93	-134.16
52	925.24	27.13	274.81	898.88	8.24	-138.56
53	934.85	26.81	275.06	907.45	8.62	-142.91
54	944.63	26.38	275.31	916.19	9.01	-147.27
55	953.91	26.06	275.43	924.52	9.40	-151.35
56	963.55	25.81	275.43	933.19	9.80	-155.55
57	973.18	25.38	274.68	941.87	10.16	-159.69
58	982.90	25.00	273.06	950.67	10.44	-163.82
59	992.54	24.88	272.06	959.41	10.62	-167.88
60	1002.19	24.69	271.81	968.17	10.76	-171.92
61	1021.59	23.63	271.81	985.87	11.01	-179.86
62	1031.24	23.06	271.43	994.73	11.12	-183.68
63	1040.86	22.69	271.93	1003.60	11.23	-187.42
64	1050.51	22.44	273.43	1012.51	11.40	-191.12
65	1060.18	22.50	275.56	1021.44	11.69	-194.80
66	1069.80	22.94	276.43	1030.32	12.08	-198.49
67	1079.44	22.19	276.18	1039.22	12.49	-202.17
68	1089.07	21.19	274.56	1048.17	12.82	-205.71
69	1098.79	20.63	273.31	1057.25	13.06	-209.18
70	1108.45	20.19	273.18	1066.30	13.25	-212.54
71	1117.65	19.88	273.93	1074.94	13.44	-215.68
72	1127.32	19.81	274.93	1084.04	13.70	-218.96
73	1136.83	19.88	275.43	1092.98	13.99	-222.17
74	1146.42	20.38	275.68	1101.99	14.31	-225.46
75	1156.05	21.25	275.68	1110.99	14.65	-228.86
76	1165.73	22.44	274.18	1119.97	14.96	-232.45
77	1175.36	22.63	273.56	1128.87	15.20	-236.13
78	1185.05	22.25	273.56	1137.83	15.43	-239.82
79	1194.72	22.50	274.43	1146.77	15.69	-243.50
80	1204.32	22.56	274.43	1155.63	15.98	-247.16
81	1213.93	22.00	275.18	1164.53	16.28	-250.79
82	1223.65	22.50	276.68	1173.52	16.66	-254.46
83	1233.25	22.50	277.43	1182.39	17.11	-258.10
84	1242.89	21.88	276.68	1191.32	17.56	-261.71
85	1252.67	22.56	275.18	1200.37	17.94	-265.39
86	1261.97	23.25	273.18	1208.94	18.20	-269.00
87	1271.56	24.00	271.18	1217.73	18.35	-272.84
88	1281.22	23.94	269.68	1226.55	18.38	-276.77
89	1290.81	23.50	269.56	1235.33	18.35	-280.62
90	1300.51	22.94	269.43	1244.25	18.32	-284.45
91	1310.31	22.81	270.81	1253.28	18.33	-288.26
92	1319.93	22.81	272.68	1262.14	18.44	-291.98
93	1329.74	22.88	273.81	1271.18	18.66	-295.79
94	1339.40	23.31	274.81	1280.07	18.94	-299.57
95	1349.13	23.13	274.18	1289.01	19.24	-303.39
96	1358.78	22.44	273.81	1297.91	19.50	-307.12
97	1368.41	22.00	273.56	1306.82	19.74	-310.75
98	1378.07	21.94	273.06	1315.78	19.95	-314.36
99	1387.71	22.44	272.93	1324.71	20.14	-318.00
100	1397.23	22.81	273.06	1333.50	20.33	-321.65
101	1406.83	23.06	273.18	1342.34	20.53	-325.39
102	1416.46	22.94	272.43	1351.20	20.71	-329.15
103	1426.13	22.94	272.31	1360.11	20.87	-332.91
104	1435.74	22.81	272.43	1368.96	21.03	-336.64
105	1445.41	22.56	272.43	1377.88	21.18	-340.37
106	1455.18	22.38	272.31	1386.91	21.34	-344.10
107	1464.46	22.13	270.93	1395.50	21.44	-347.61
108	1474.16	22.06	270.81	1404.49	21.49	-351.26
109	1483.95	22.19	270.43	1413.56	21.53	-354.95
110	1502.00	22.00	270.06	1430.28	21.56	-361.74
111	1522.00	22.00	270.06	1448.82	21.57	-369.23

TVD - 3D PLOT

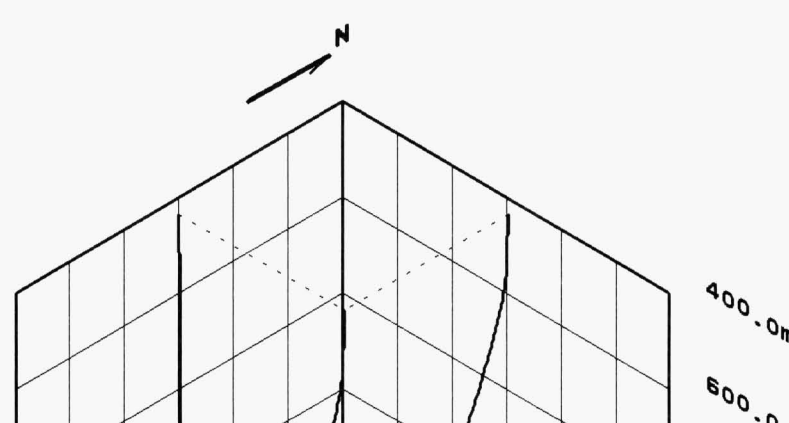

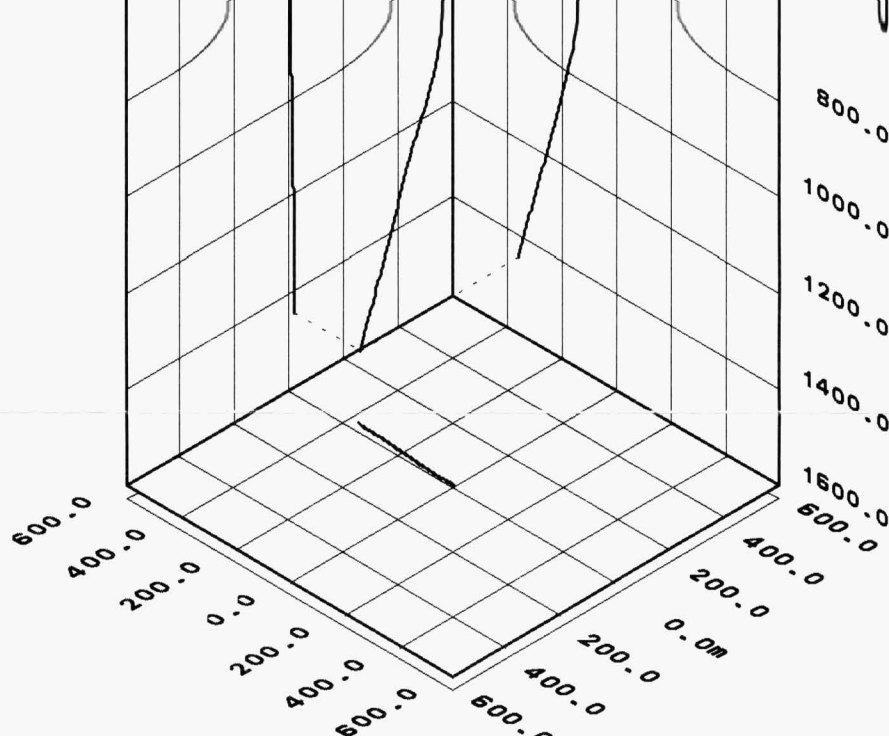

Company - **PARAMOUNT RESOURCES LTD.**
 Well - **PARA ET AL CAMERON 2M-73**
 Location - **M-73**
 Date - **26-MAR-2005**

Drilled Depth - **1522.00**
 True Vertical Depth - **1448.82**
 Bottom Hole Displacement - **N 21.57 m W 369.23 m**
 Target Displacement - **N 0.00 m E 0.00 m**

O.H. Adaptor Head

Weight 18.0 kg
 Length 0.74 m
 Max. Diameter 8.9 cm
 Total Stack Weight 877.5 kg in air
 Total Stack Length 34.50 m

Crossover

Weight 6.8 kg
 Length 0.27 m

Wireline Communications Cartridge

Weight 53.6 kg
 Length 2.31 m
 Max. Diameter 8.6 cm

2-Arm Caliper

Weight 79.4 kg
 Length 2.40 m
 Max. Diameter 10.2 cm

Borehole Compensated Sonic

Weight 104.0 kg
 Length 4.62 m
 Max. Diameter 8.6 cm

Centralizer

Weight 30.9 kg
 Length 1.38 m
 Max. Diameter 8.6 cm

MRT 400

Weight 121.5 kg
 Length 4.04 m
 Max. Diameter 12.7 cm

SPeD 400 Electronics


Weight 56.7 kg
 Length 2.92 m
 Max. Diameter 8.6 cm

Universal GR

Weight 37.3 kg
 Length 1.40 m
 Max. Diameter 8.6 cm

Mandrel Neutron

Weight 45.4 kg
 Length 2.07 m
 Max. Diameter 8.6 cm

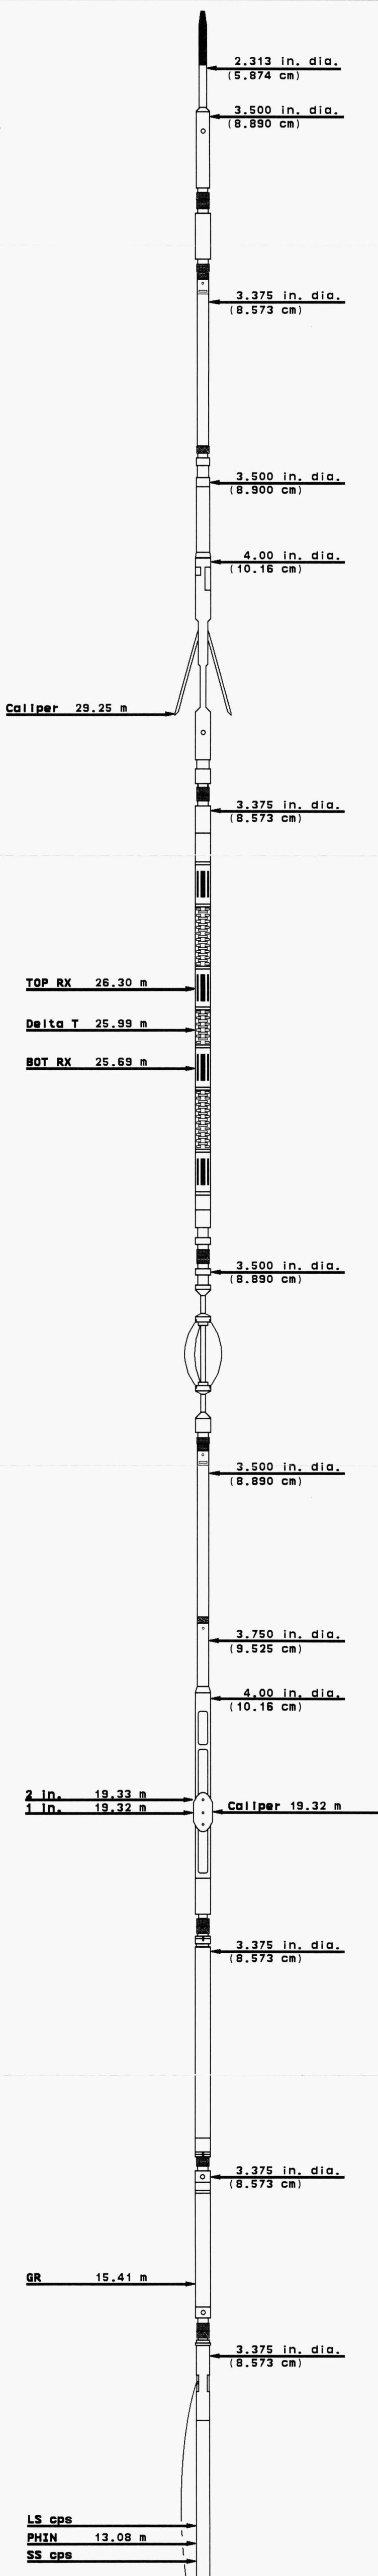

SPeD 400 Pad Section

Weight 141.5 kg
 Length 3.38 m
 Max. Diameter 11.4 cm

Simultaneous Triple Induction

Weight 176.9 kg
 Length 8.75 m
 Max. Diameter 10.2 cm

Stand - Off

Weight 5.5 kg
 Length 0.20 m

Caliper 9.61 m

ILD 3.28 m

SFL 2.65 m

SP 2.41 m

ILM 2.10 m

3.67 in. dia.
(9.32 cm)

4.19 in. dia.
(10.64 cm)

LS cps/PE

PHID 9.63 m

SS cps/PE

4.00 in. dia.
(10.16 cm)

3.375 in. dia.
(8.573 cm)

4.00 in. dia.
(10.16 cm)



PRECISION
ENERGY SERVICES

COMPANY PARAMOUNT RESOURCES LTD.

WELL PARA ET AL CAMERON 2M-73

FIELD CAMERON HILLS PROVINCE N.T.