



WELL TERMINATION RECORD

This record is submitted in compliance with Section 184.(1) of the *Canada Oil and Gas Drilling Regulations* (SOR/79-82).

Well Name: Paramount et al Cameron I-16
Well ID: 1482 Area: Cameron Hills, NWT
Grid Area: 60-10-117-30 Field / Pool: Cameron Hills
Interest Identifier: Commercial Discovery 006 Total Depth: 1490.00m
Coordinates (NAD 27): Lat.: 60°5'42.5" Long.: 117°32'01.8"
Elevation-KB/RT: 735.40m GL / Seafloor: 731.40m
Spud Date: 02/02/2005 Rig Release Date: 16/02/2005

CASING AND CEMENTING PROGRAM

O.D. (mm)	Weight (kg/m)	Grade	Depth Set (m KB)	Cement (m³)
339.00	81.00	K-55	63.00	10.0t
244.50	53.60	K-55	377.00	28.0t
139.70	23.10	K-55	1489.00	20.5t

PLUGGING PROGRAM

Type of Plug	Interval (m KB)	Felt	Depth (m KB)	Cement (m³)
Select	-	Yes		
Select	-	Yes		
Select	-	Yes		
Select	-	Yes		
Select	-	Yes		

Lost Circulation/Overpressure Zones: _____

Equipment left on Seafloor (Describe): _____

Provision for Re-entry (Describe and attach sketch): _____

Cores: Type: Select Interval: m - m
Select m - m

Other Downhole Completion/Suspension: See attached bottom hole diagram.

CERTIFICATION

"I certify on the basis of personal knowledge of operations undertaken at the above named well that the above information is accurate."

Signed: Dave Block Date: Aug 24, 2005
Name: Dave Block Operator: Paramount Resources Ltd.
Title: Engineering Consultant Telephone: (403)206-3834

NEB USE ONLY

Current Well Status

Suspended ☐
Completed ☐
Abandoned ☐

Date: 06 Sep 05
File: 9211-Eng-1-2
WID: 1482
UWI: 3005166010117302

Acknowledged by: [Signature]
Chief Conservation Officer

PARAMOUNT ET AL CAMERON I-16

60° 10' N, 117° 30' W

Bottom Hole Diagram (as of Feb 16, 2005)

KB: 735.4 m
GL: 731.4 m

Casing leak at 214 mKB cemented back to surface with class 'G' cement.

63

63

377


339 mm, 81 kg/m, K-55 casing set at 63 mKB. Cemented with 7.7 m³ 'G' cement + 3% CaCl₂.

244.5 mm, 53.6 kg/m, K-55 casing set at 377 mKB. Cemented with 16.3 m³ class 'G' cement + 2% CaCl₂. Followed by 5.3 m³ class 'G' cement + 2% CaCl₂ top job.

139.7 mm, 23.1 kg/m, K-55 casing set at 1489.3 mKB. Cemented with 20.5 t class 'G' cement + 0.75% CR-2.

73 mm, 9.67 kg/m, J-55, EUE tubing to surface

Cement top at 1057 mKB

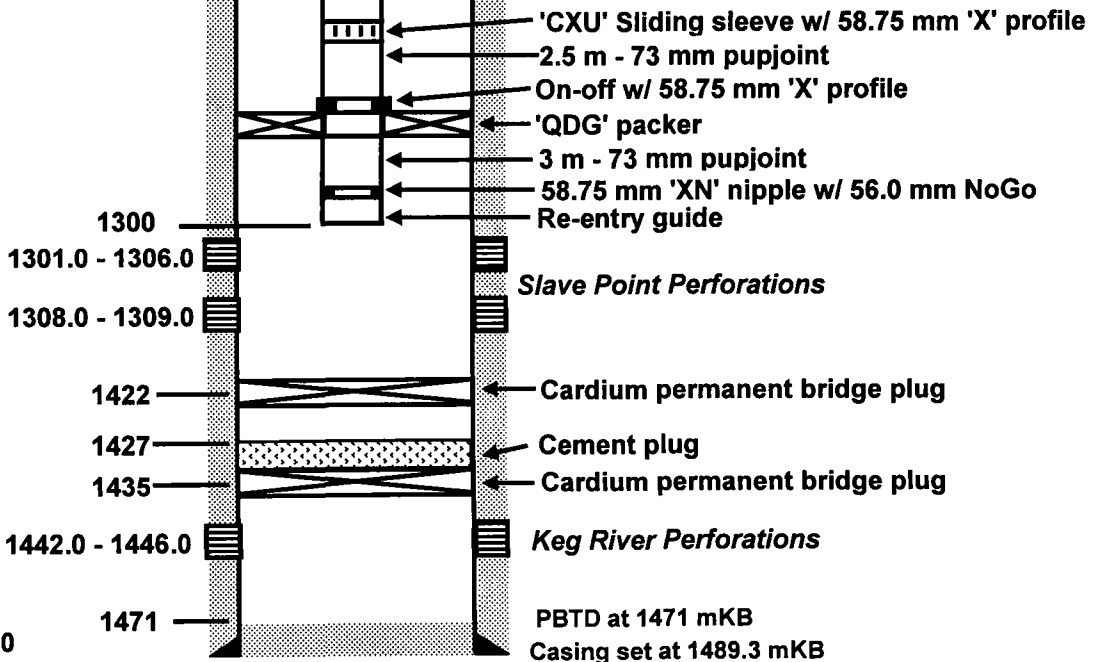

Total Depth = 1490