



Scale 1:240 (5"=100') Metric

Well Name: Para et al Cameron J-74
Location: Unit J Section 74 Grid Area 60°10"N, 117°15"W
Licence Number: 1125
Spud Date: Feb 28, 2006 16:30hrs
Surface Coordinates: Latitude: 60°03'38.894" North
Longitude: 117°28'55.779" West
Bottom Hole Coordinates: Latitude: 60°03'38.894" North
Longitude: 117°28'55.779" West
Ground Elevation (m): 771.10 K.B. Elevation (m): 775.30
Logged Interval (m): 15 To: 1465 Total Depth (m): 1465
Formation: Primary = Sulphur Point Dolomite Secondary = Slave Point Limestone
Type of Drilling Fluid: Gel Chem

Printed by STRIP.LOG from WellSight Systems 1-800-447-1534 www.WellSight.com

OPERATOR

Company: Paramount Resources Ltd.
Address: 4700 Bankers Hall West 888 3rd Street S.W.
Calgary, Alberta Canada T2P 5C5
Tel: (403) 290-3600 Fax: (403) 262-7994


GEOLOGIST

Name: Silviu Gridan, B.Sc.
Company: Running Horse Resources Inc.
Address: www.WellsiteGeologists.com
WellsiteGeologists@telus.net
Tel: (403) 234-7625 Fax: (403) 263-7626


Comments

This well was drilled by Precision Drilling Rig #129
Paramount AFE No.: 05N610061
Wireline services provided by Precision Unit #3423


ROCK TYPES




Anhy
Bent
Brec
Cht




Clyst
Coal
Congl
Dol



Gyp
Igne
Lmst
Meta




Mrlst
Salt
Shale
Shcol





Shgy
Sltst
Ss
Till

BS	Boundst
C	Chalky
CX	Cryxln
E	Earthy
FX	Finexln
GS	Grainst
L	Lithogr
MX	Microxln
MS	Mudst
PS	Packst
WS	Wackest

 Casing
 Rft
 Sidewall

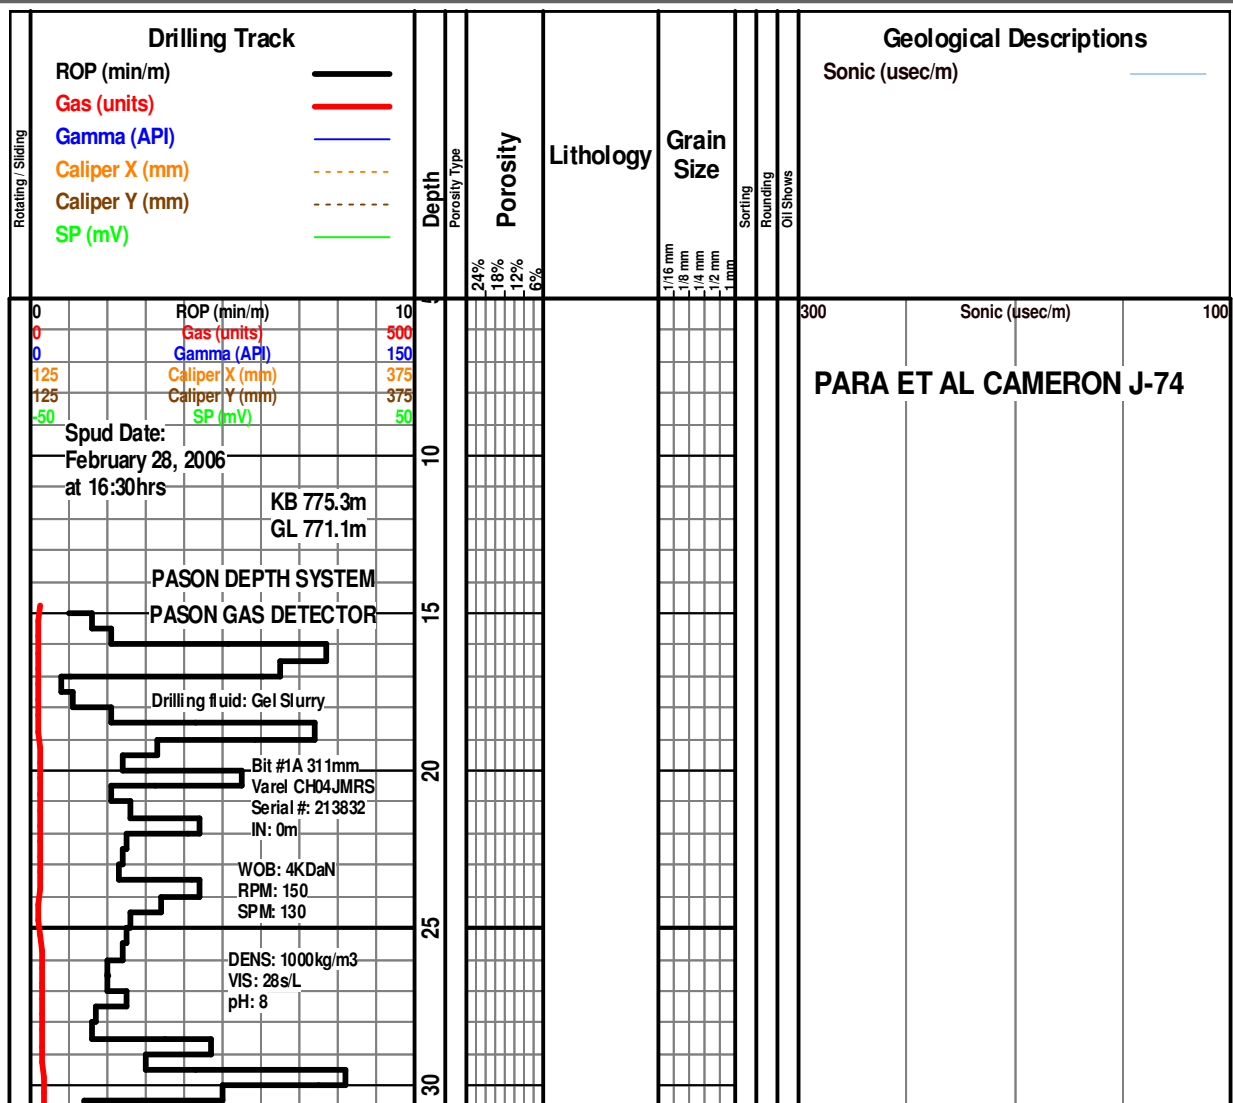

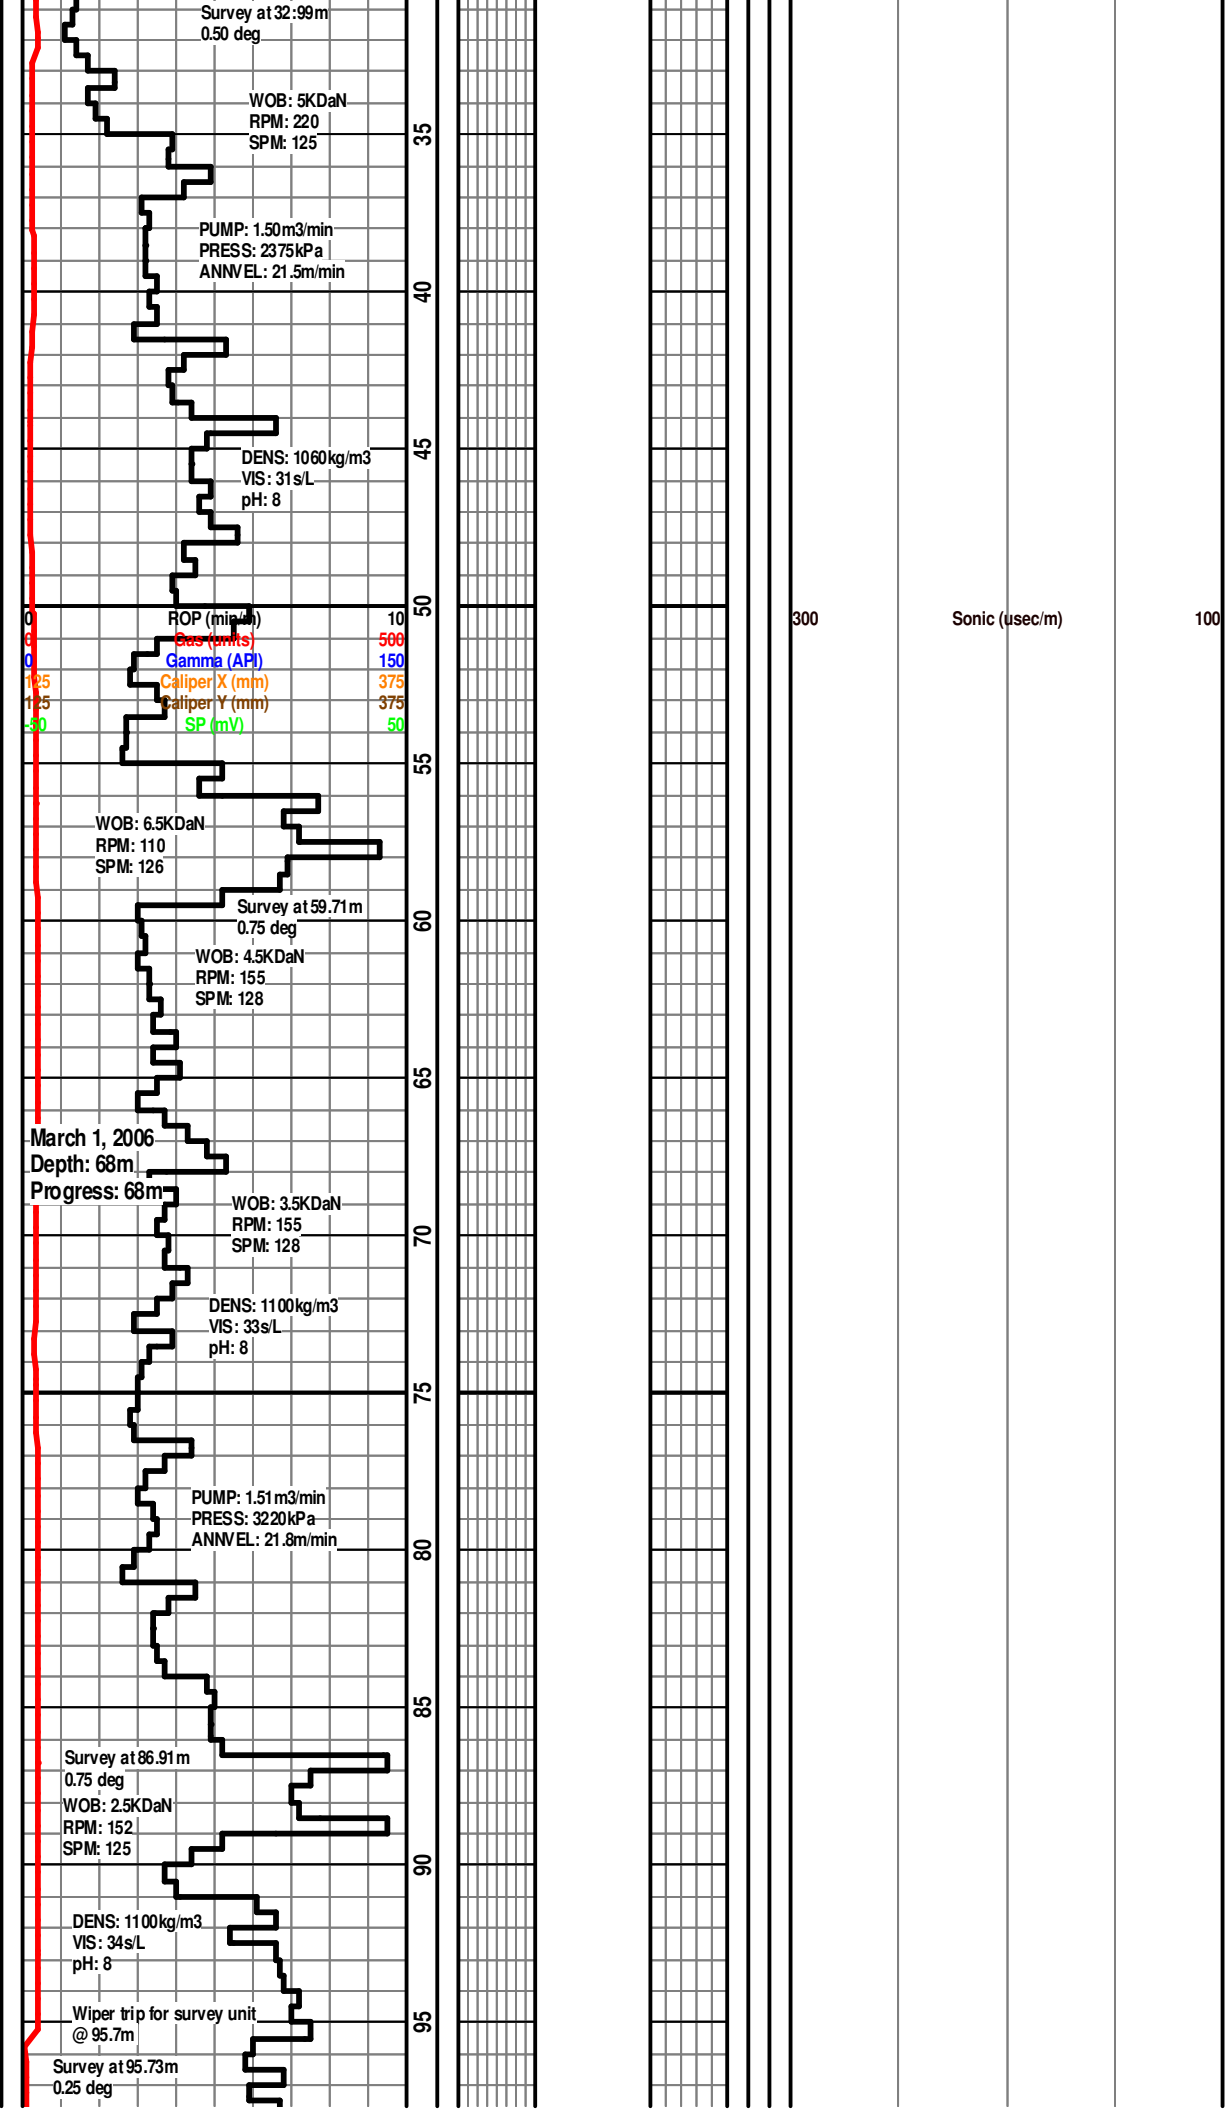

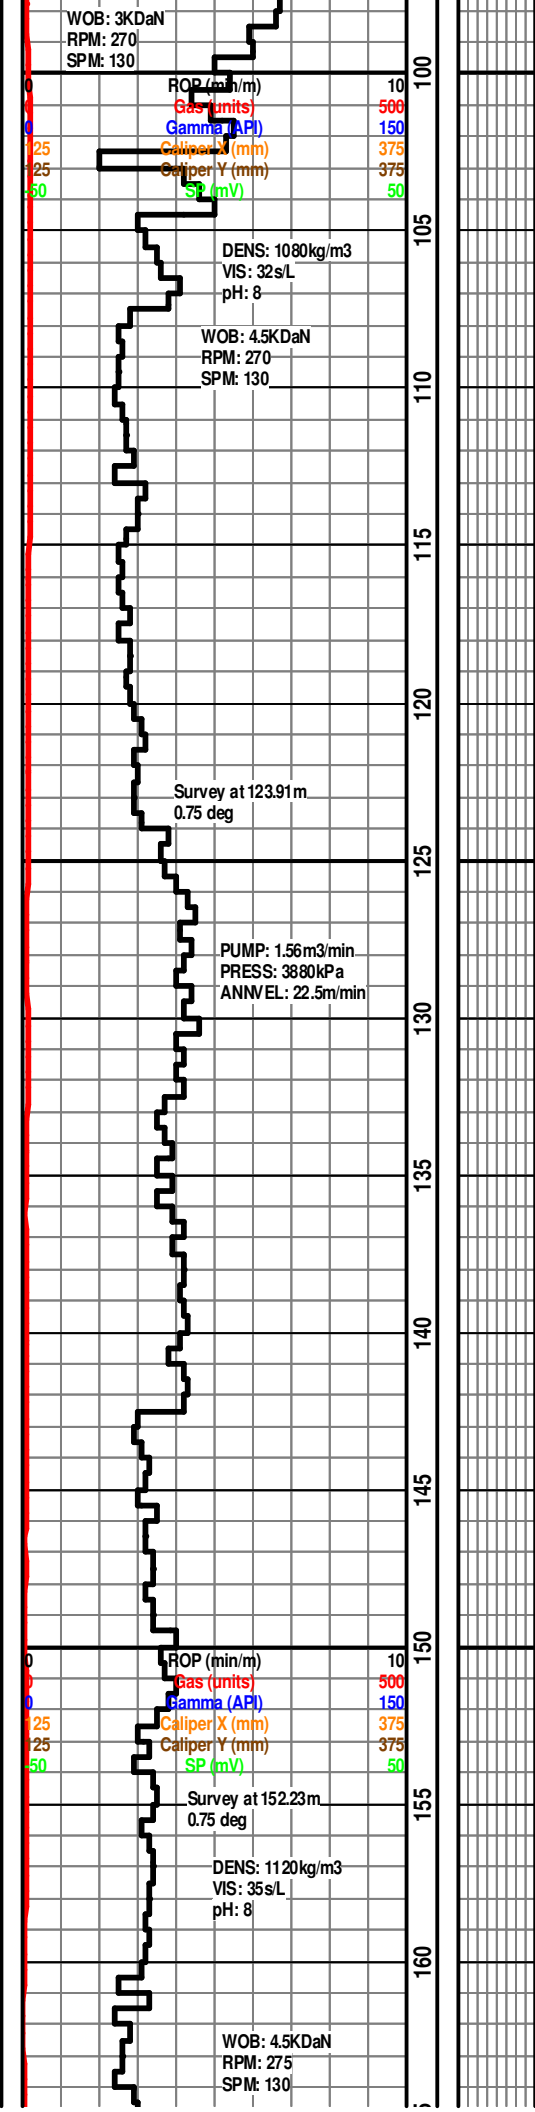

300


Sonic (usec/m)


100


300

Sonic (usec/m)

100

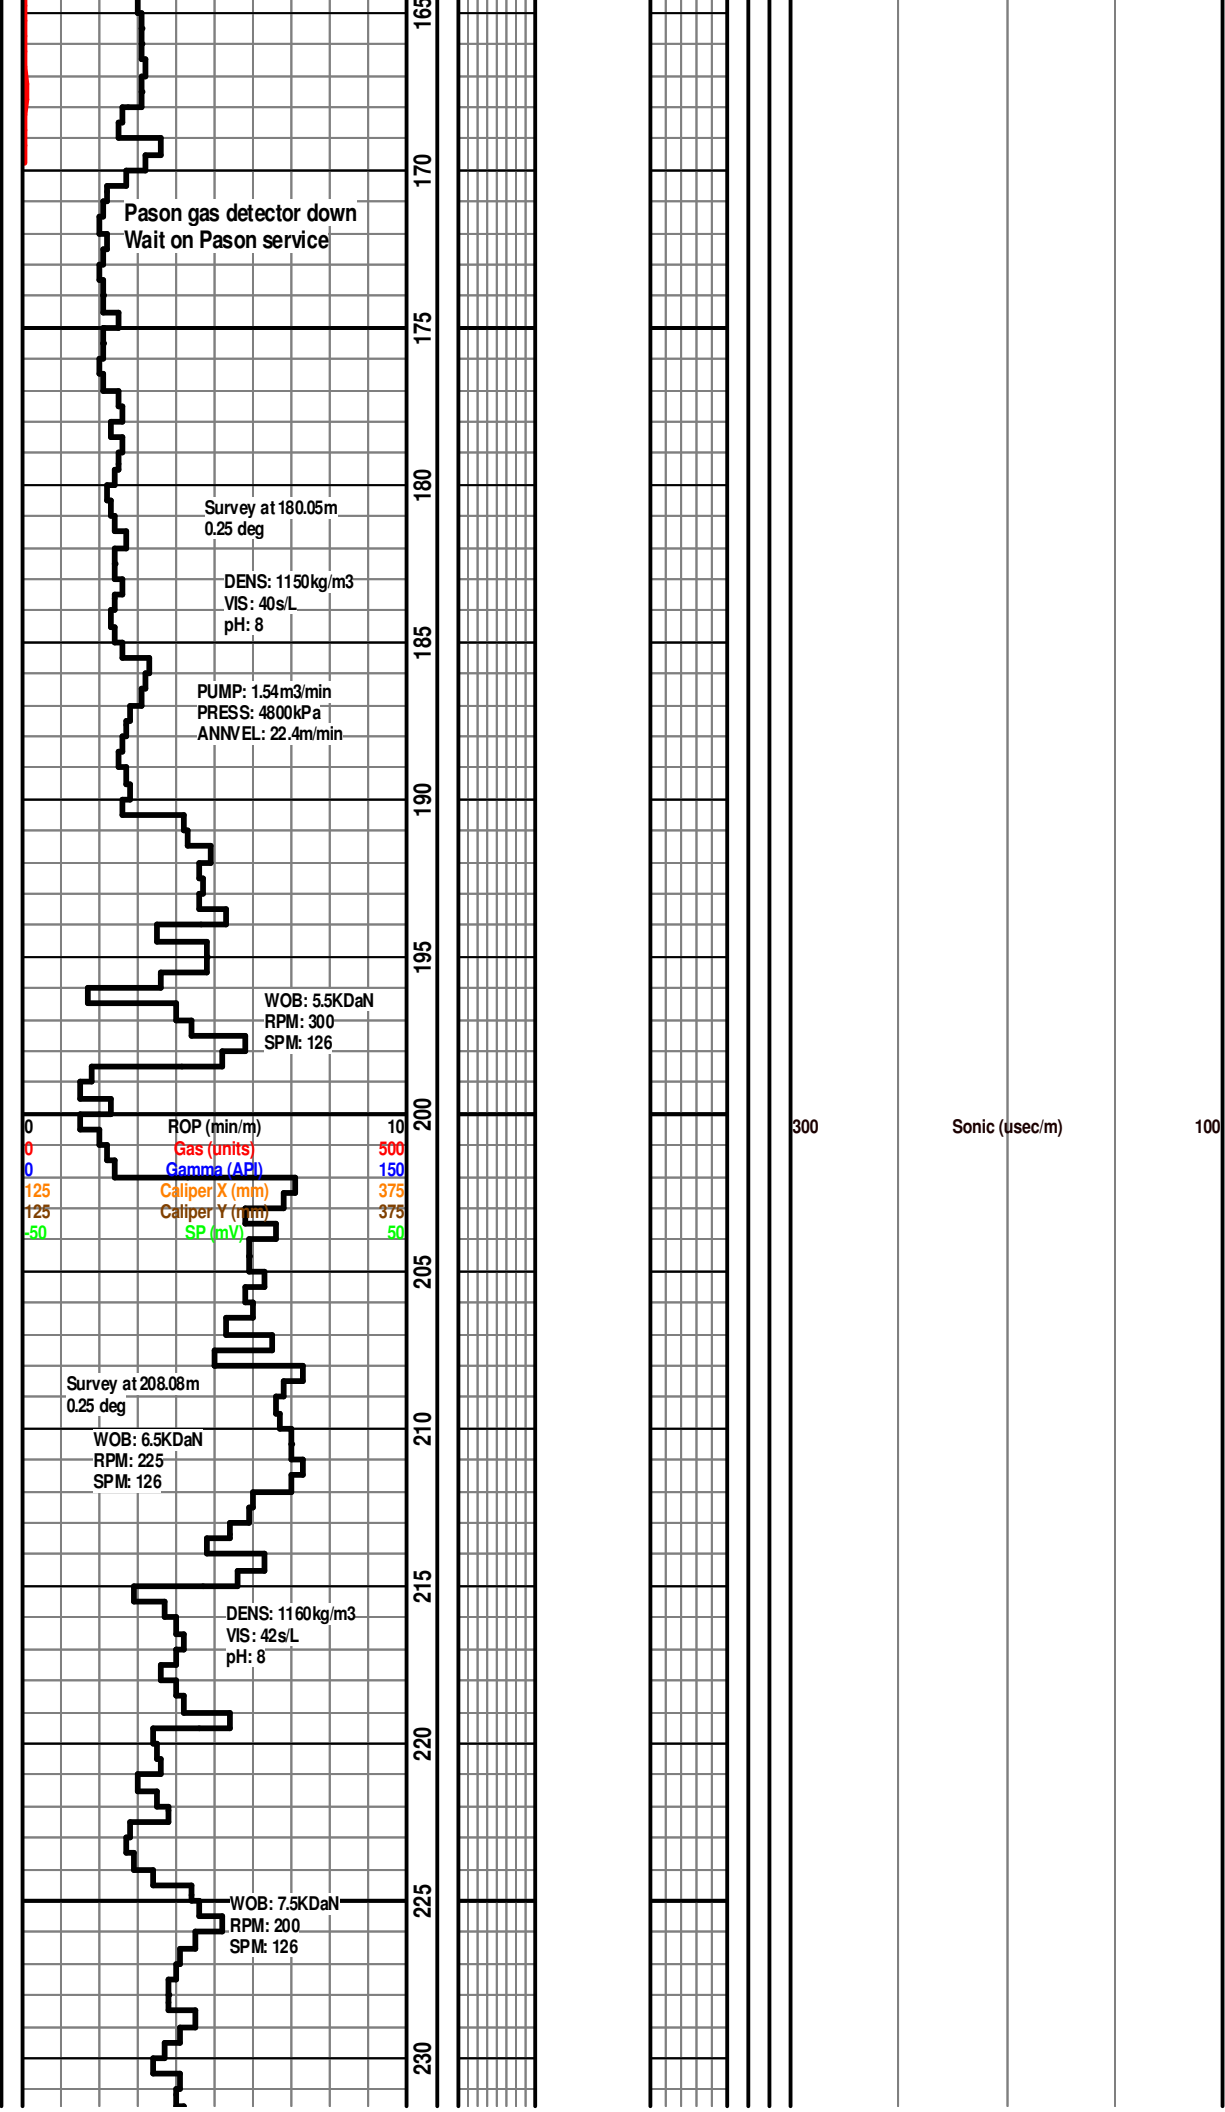

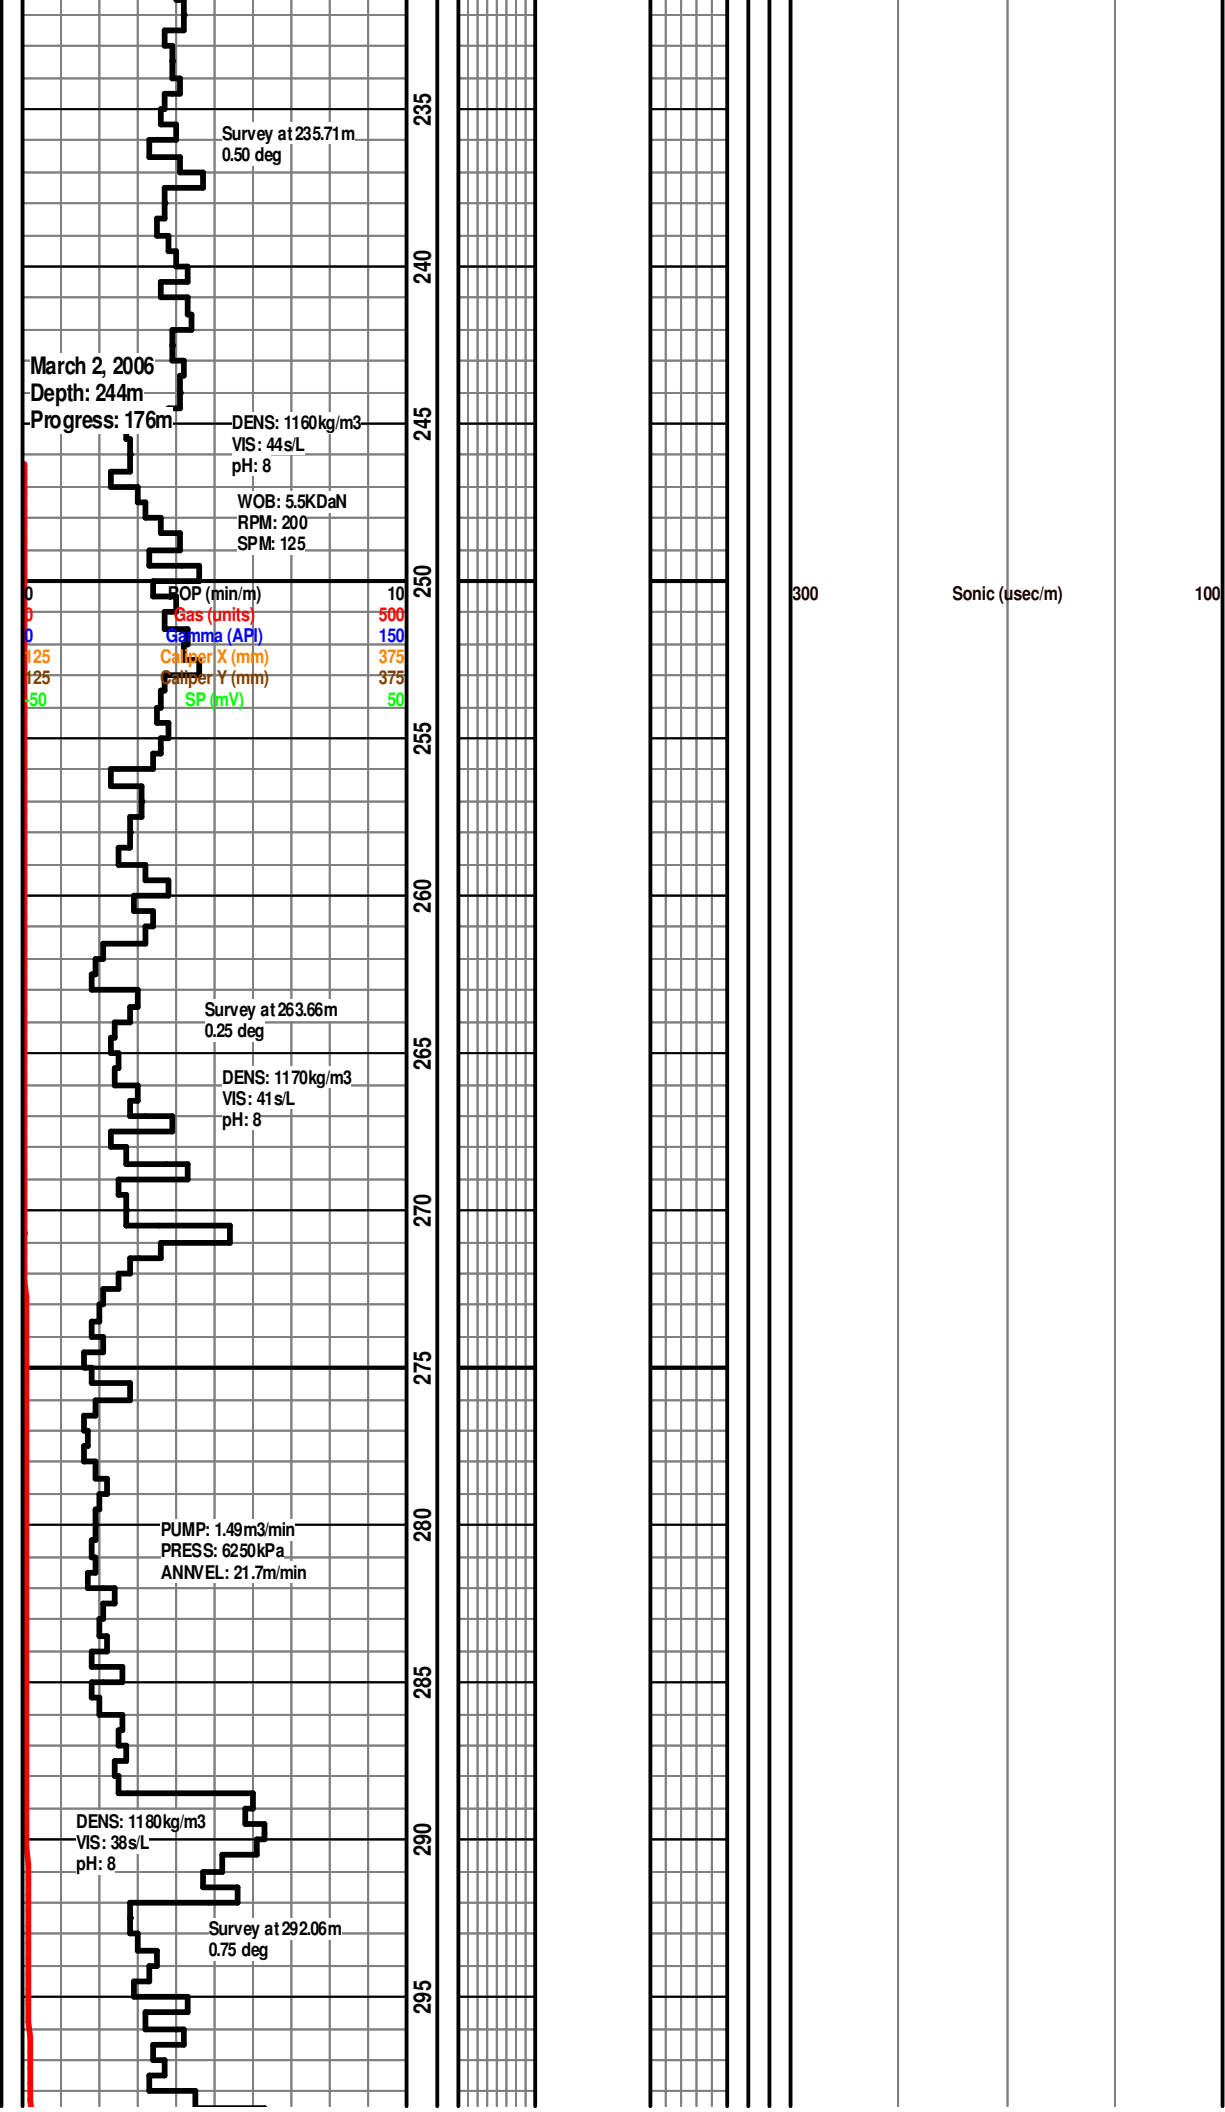

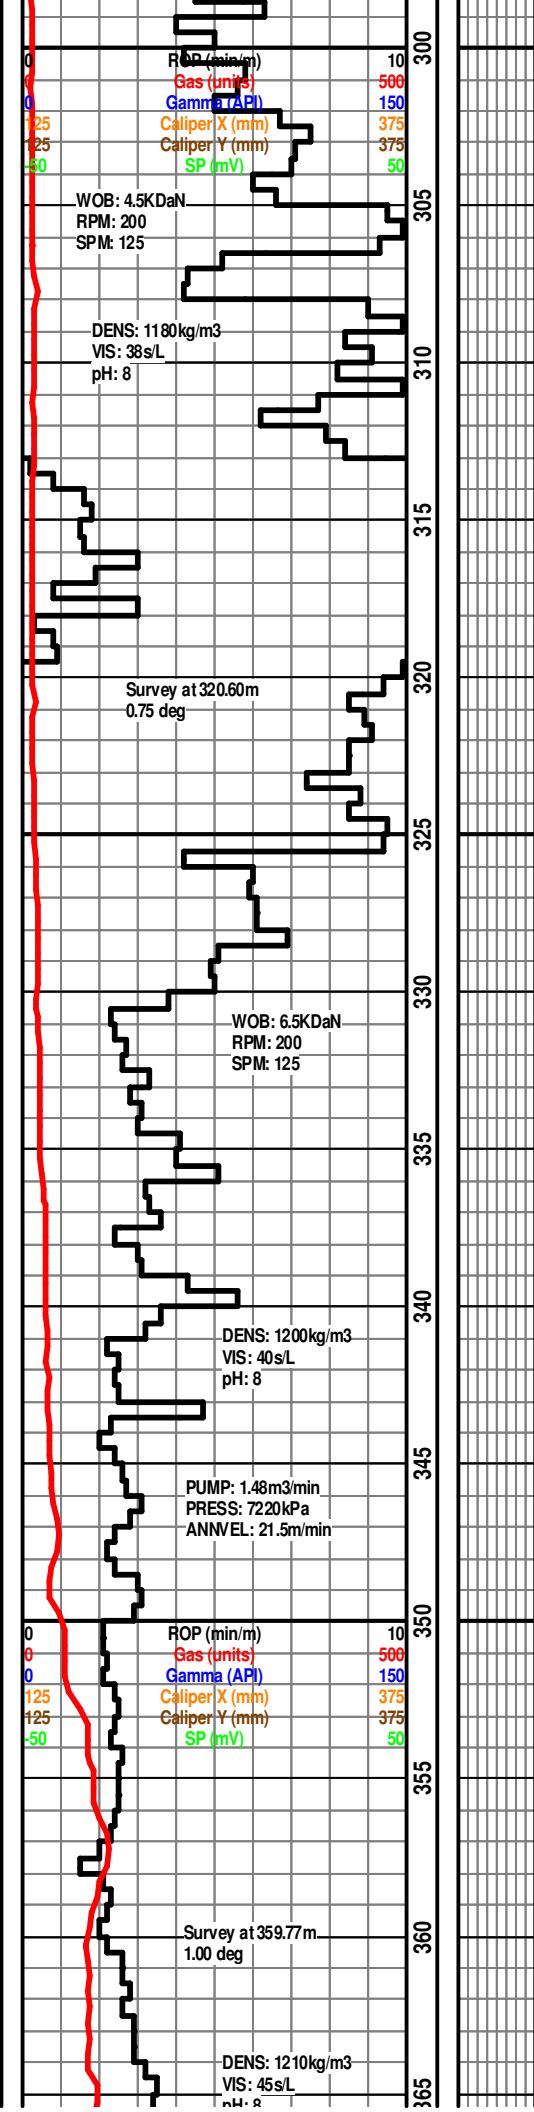

300



Sonic (usec/m)

100

300

Sonic (usec/m)

100

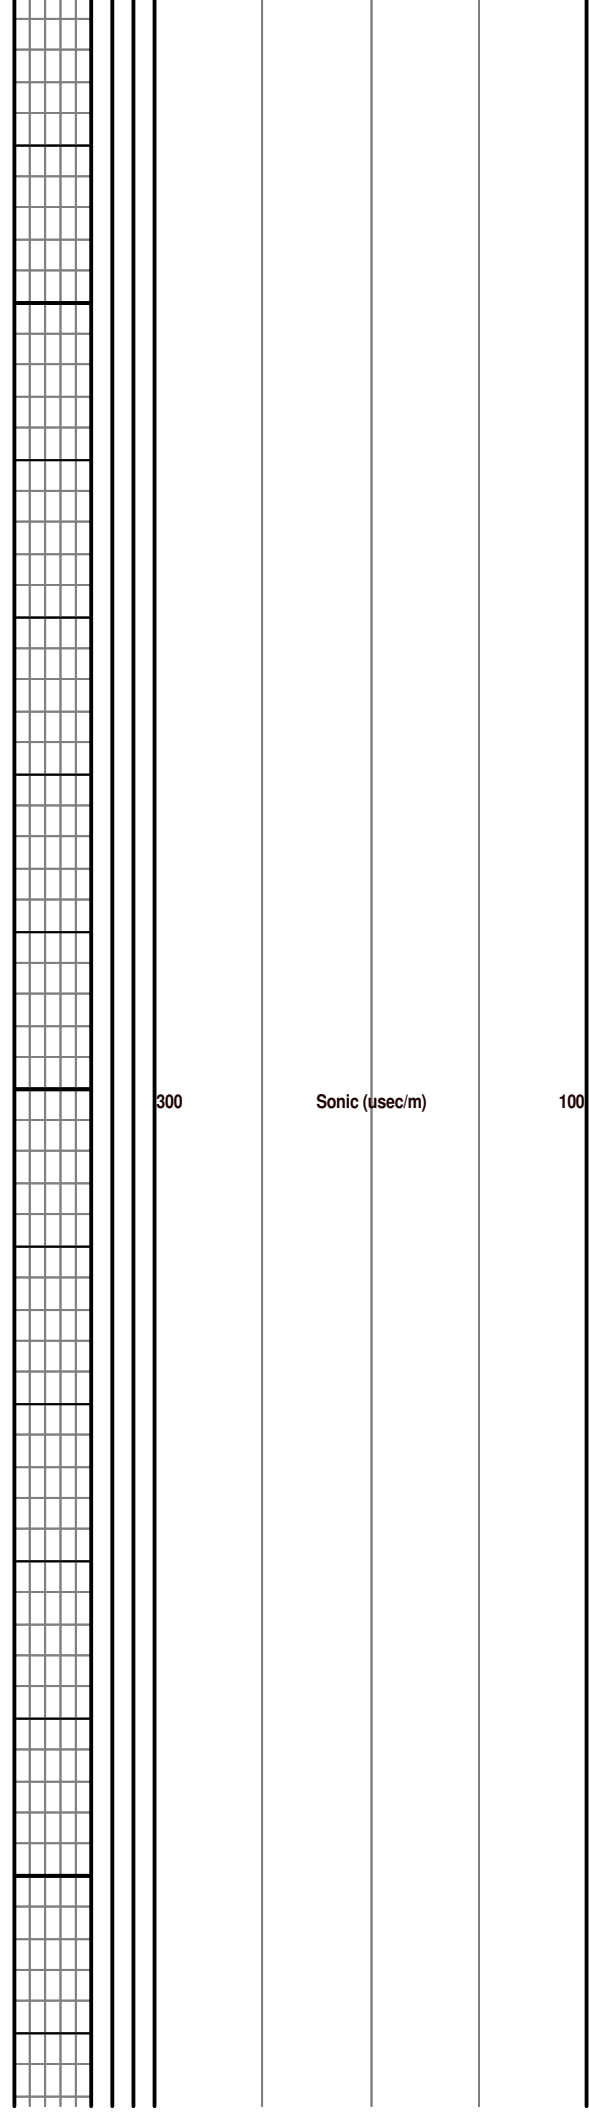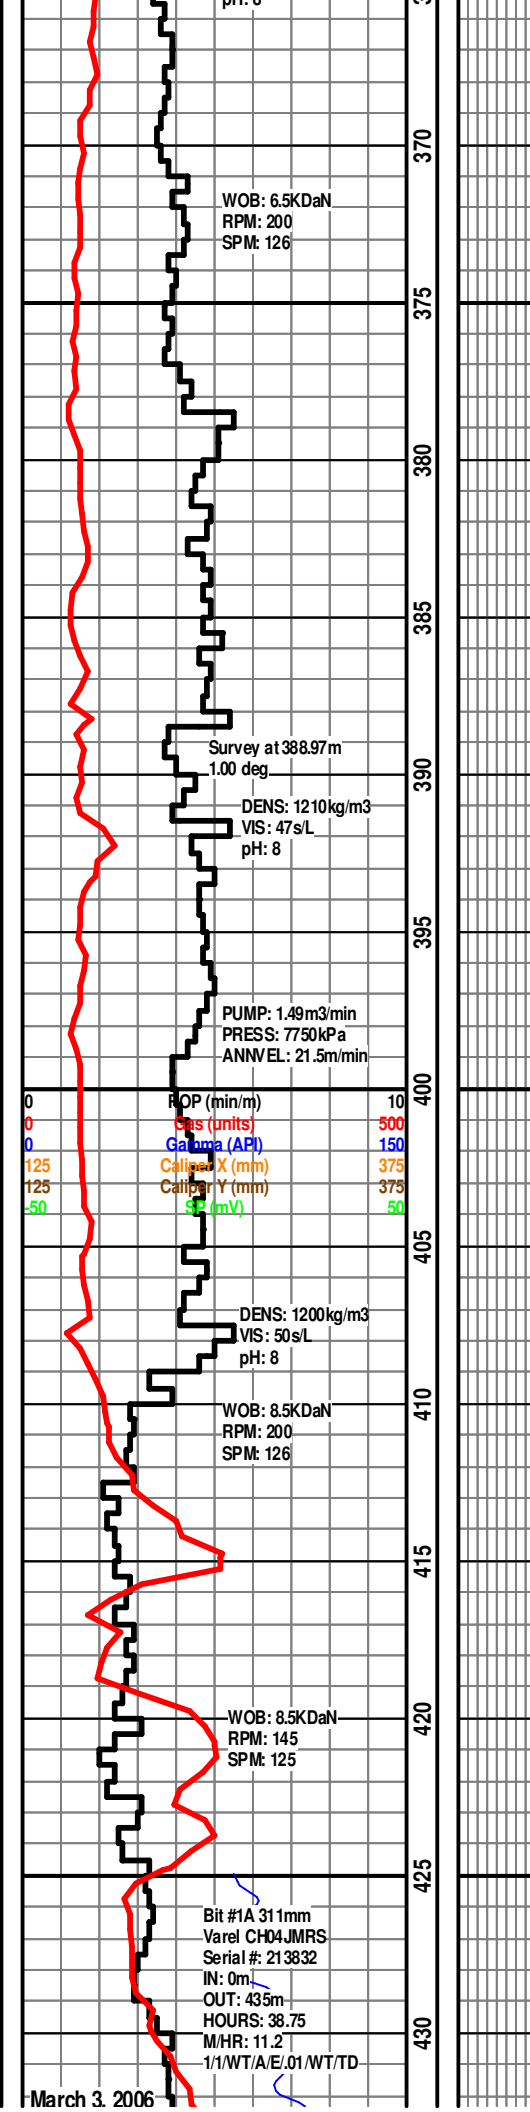

Depth: 435m
Progress: 191m

Survey at 435.00m
0.75 deg

Surface casing
219.1mm set at 435m

March 4, 2006
March 5, 2006
Depth: 435m
Progress: 0m

Bit #1 200mm
Varel MKS55
Serial #: 2426
IN: 435m

DENS: 1000kg/m3
VIS: 29s/L
pH: 10.5

Note: Gas Scale
Change at 450m

Scale Change
ROP (min/m)
Gas (units)
Gamma (API)
Caliper X (mm)
Caliper Y (mm)
SP (mV)

0
125
125
30

10
1500
150
375
375
50

WOB: 3.5KDaN
RPM: 85
SPM: 115

DENS: 1000kg/m3
VIS: 29s/L
pH: 10.5

WOB: 3.5KDaN
RPM: 85
SPM: 115


PUMP: 1.37m3/min
PRESS: 4420kPa
ANN/FI: 47 dm/min

435
440
445
450
455
460
465
470
475
480
485
490
495


300

Sonic (usec/m)

100

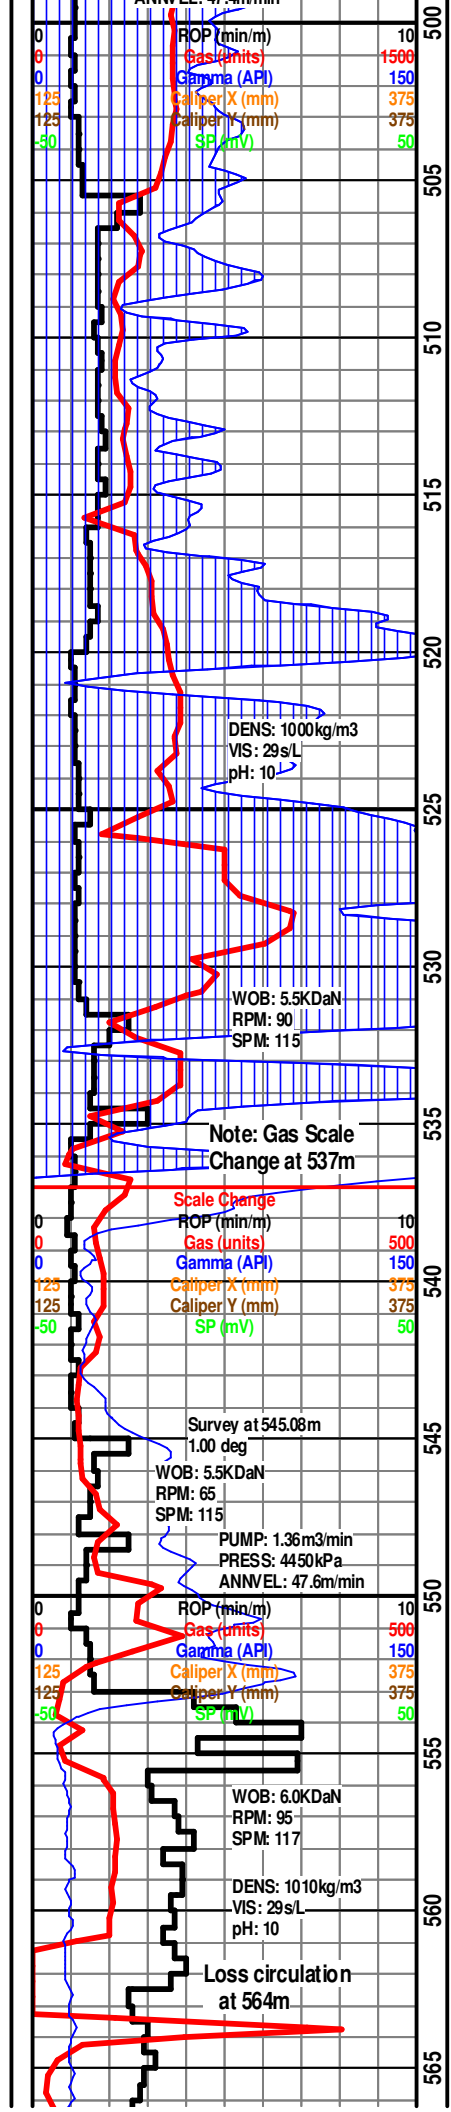

300 Sonic (usec/m) 100


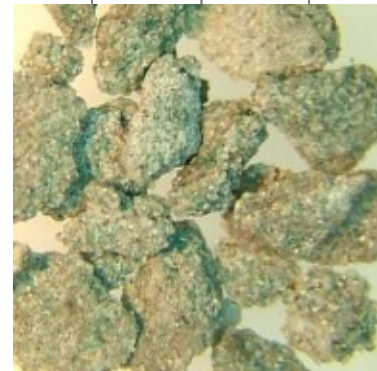



[539 - 545] SS 80%, med gy, v f grnd, rry f grnd, sb ang to sr grns, w srt, mod cmt, fri ip, silc cmt, abnt glau, arg ip, p intgr por, ns



300 Sonic (usec/m) 100


WABAMUN 553.8m
(221.5m SSL)



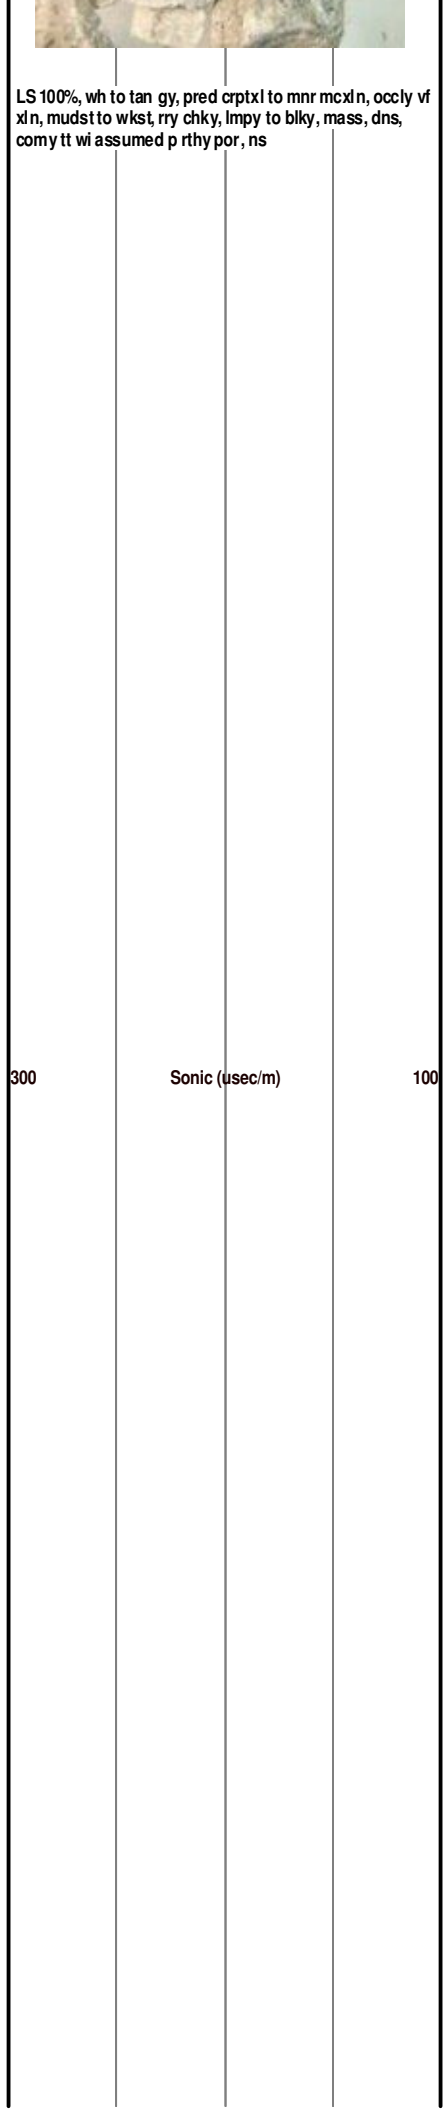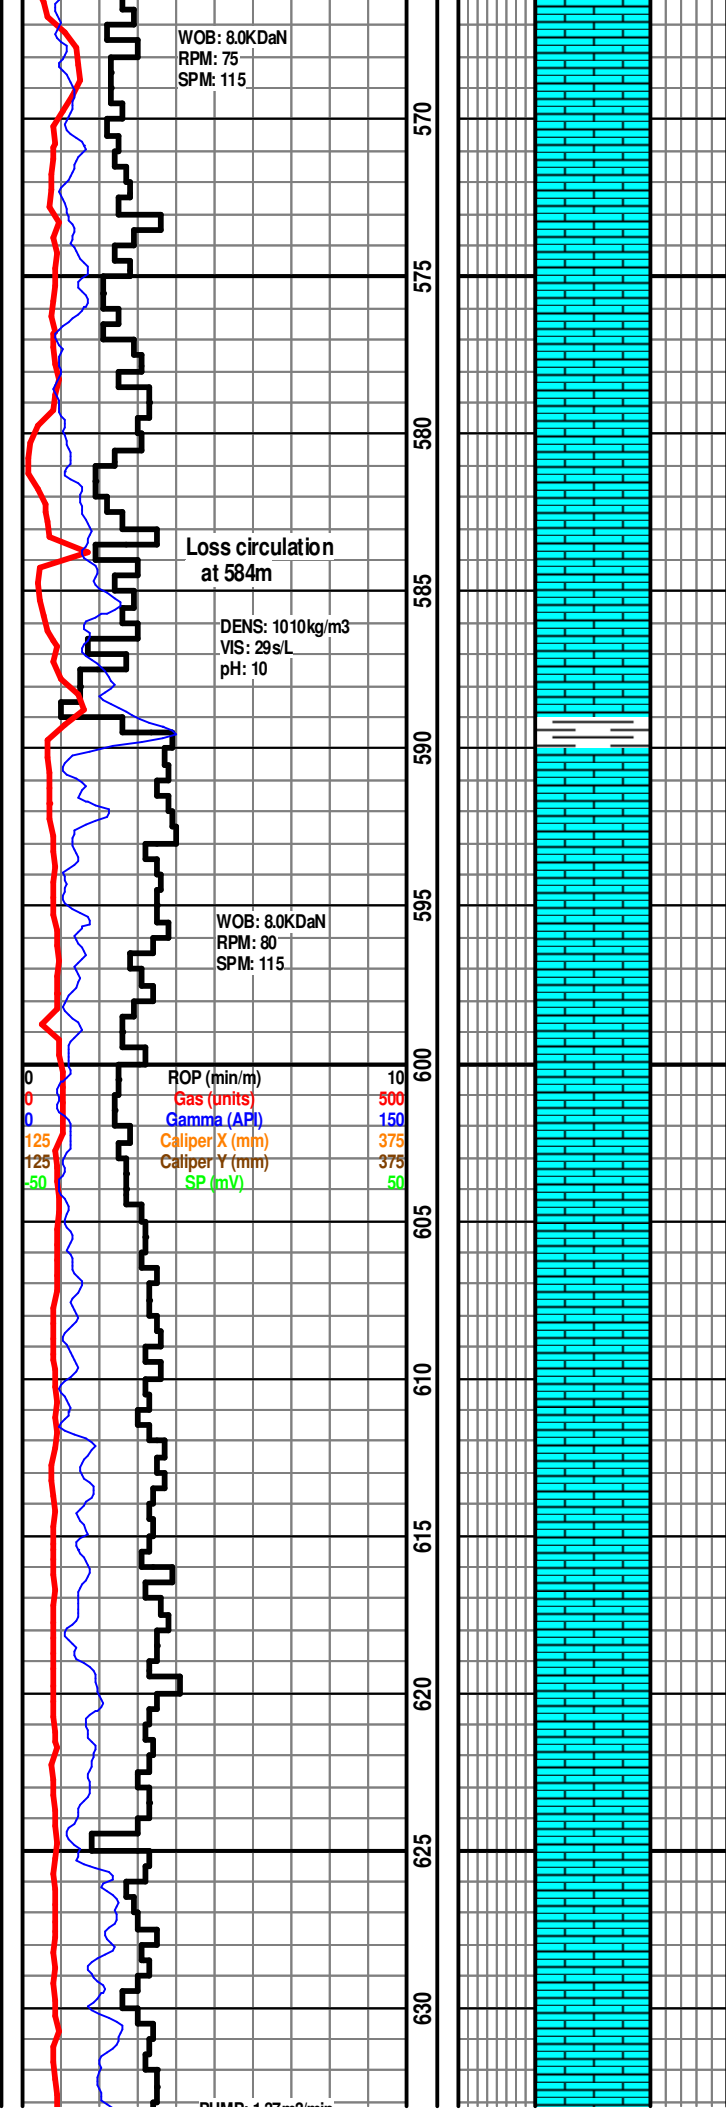

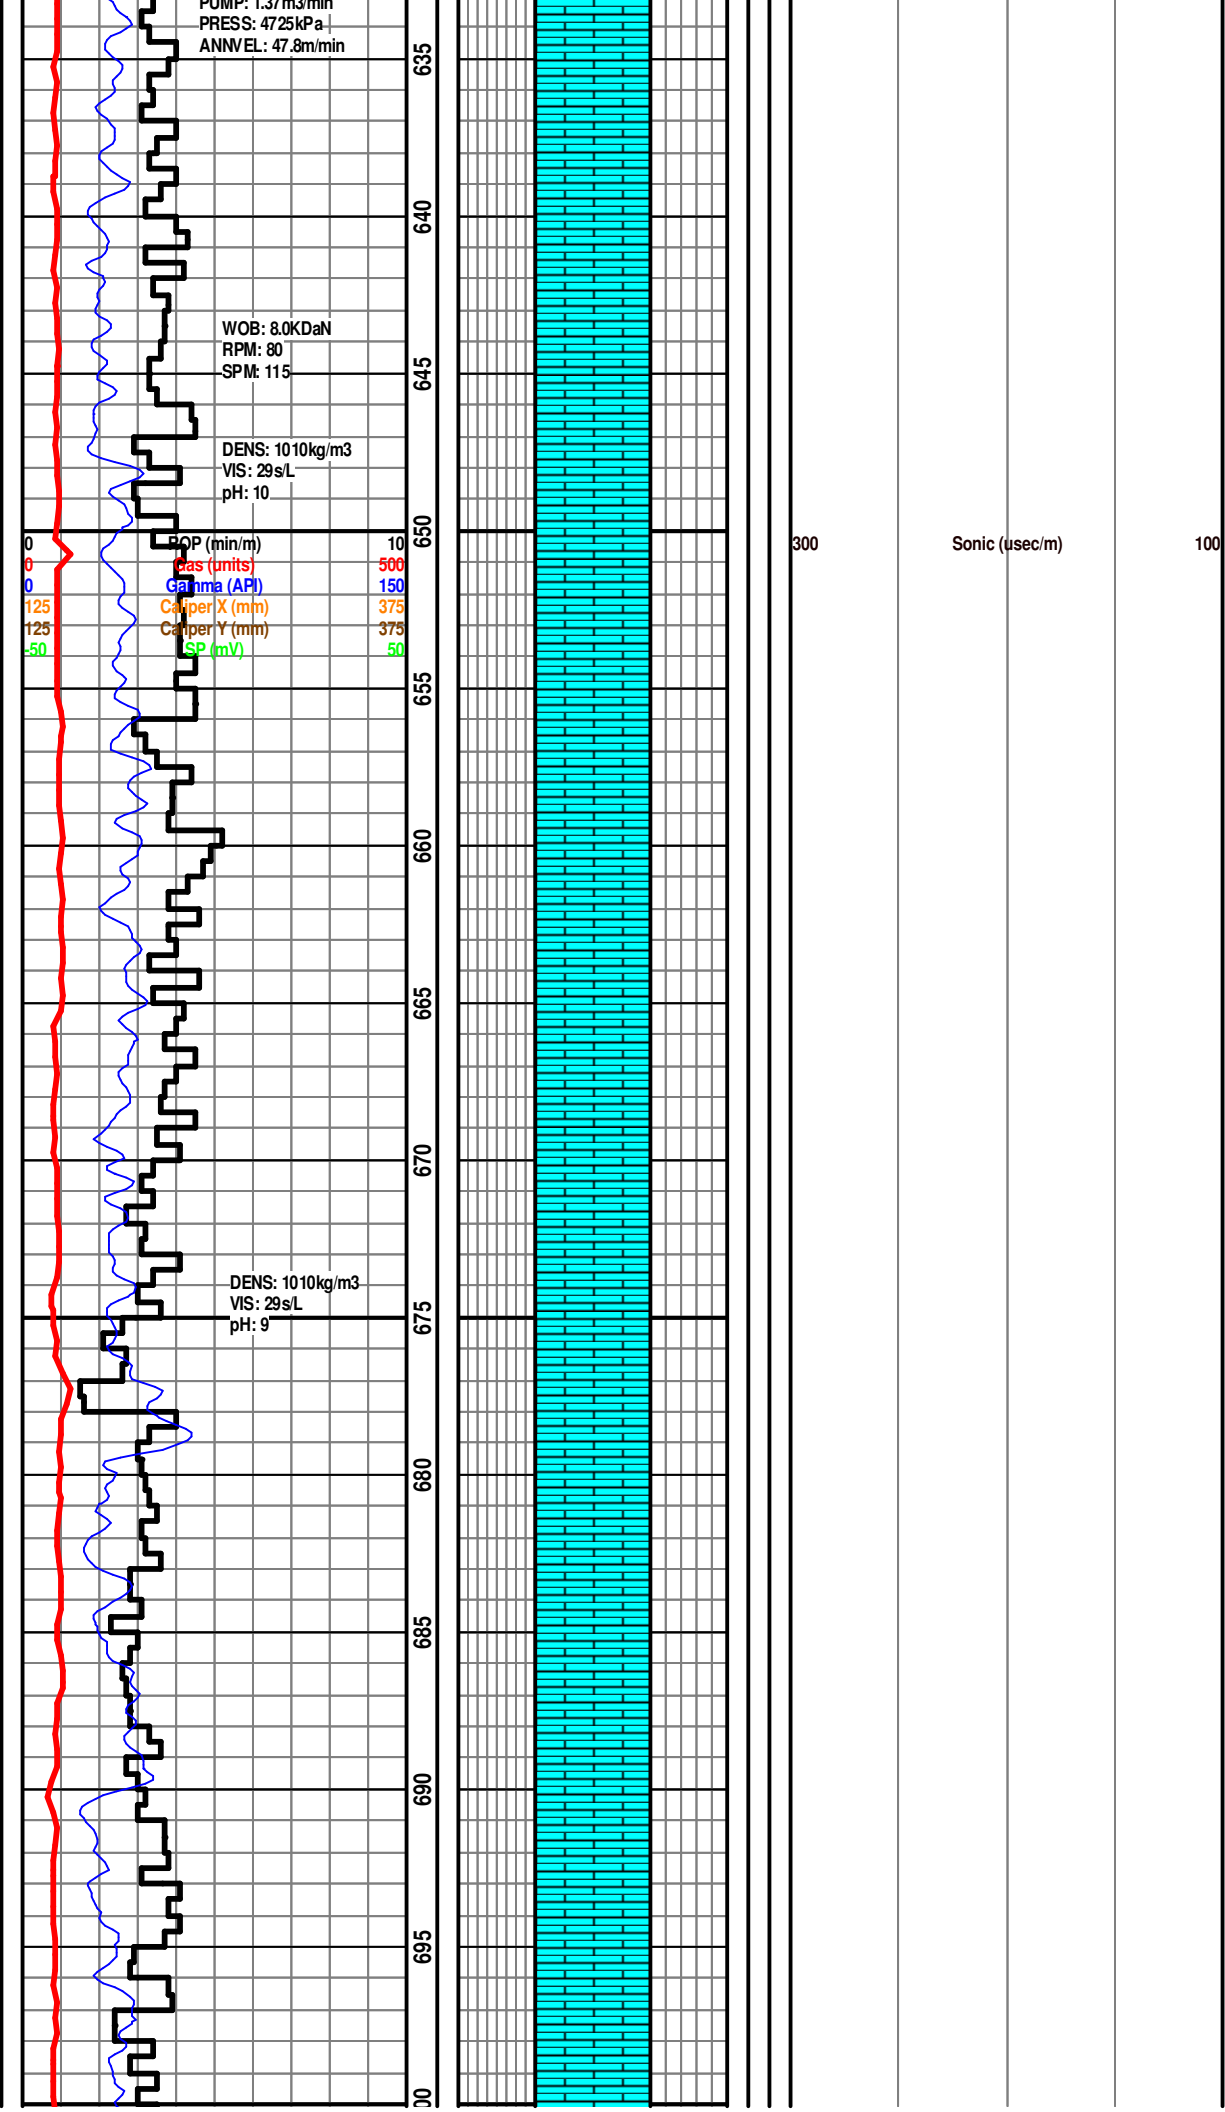

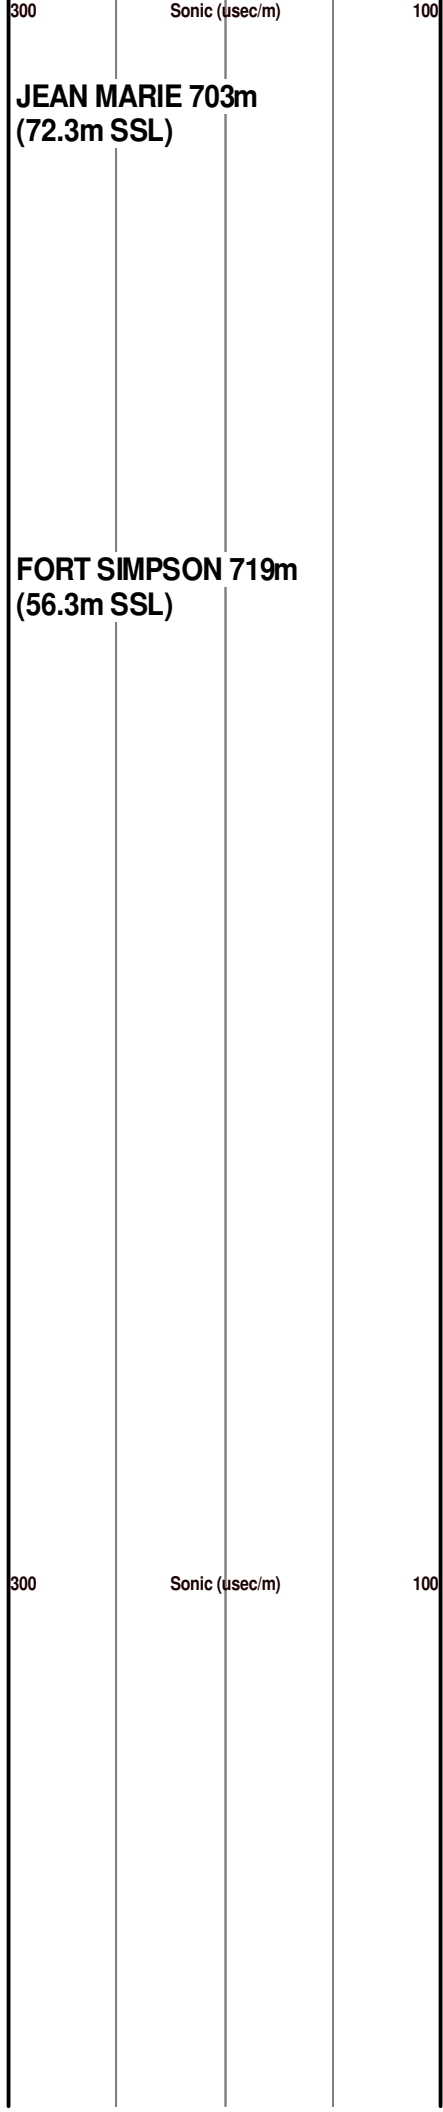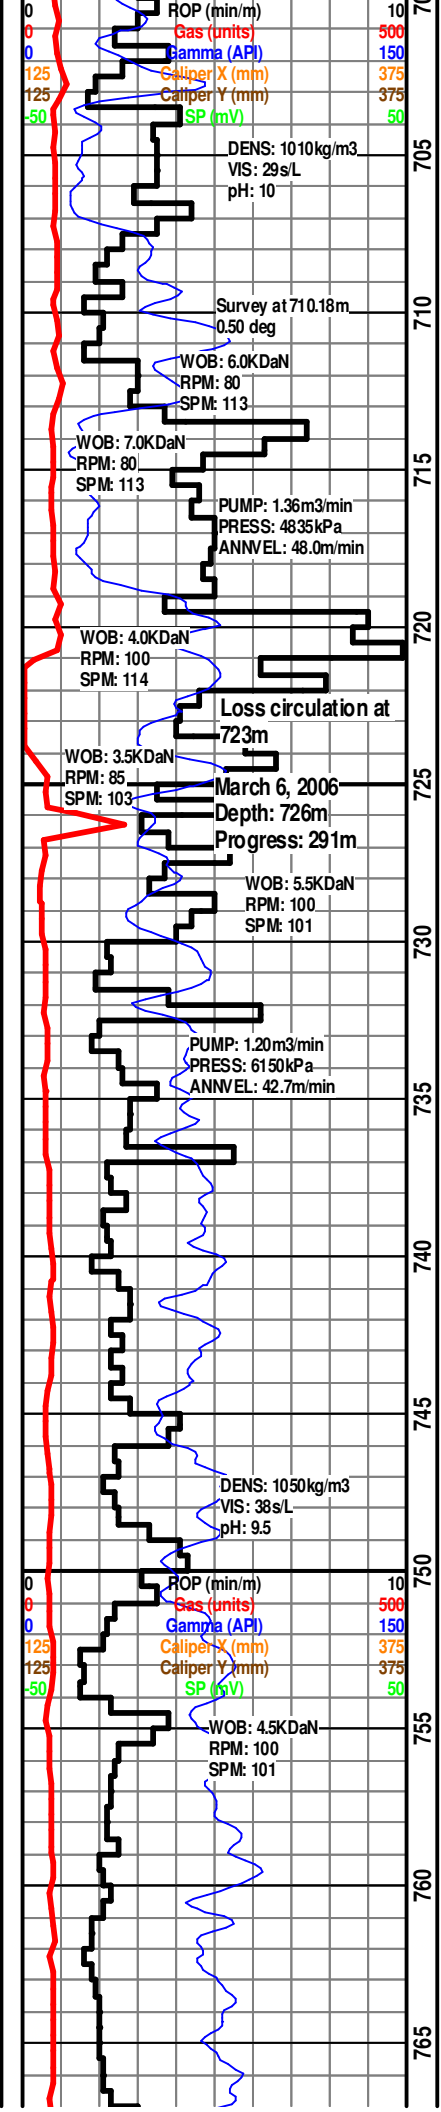


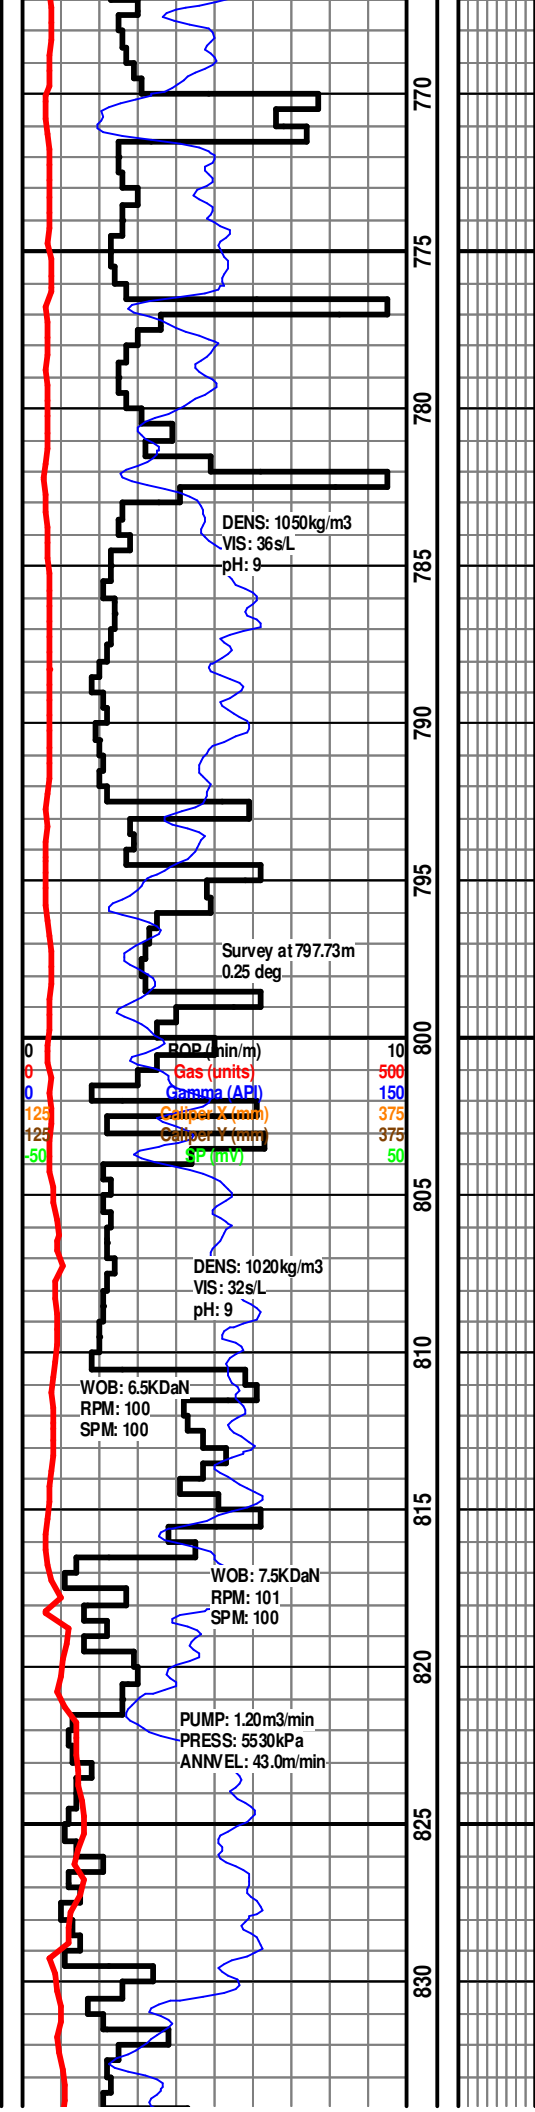

300

Sonic (usec/m)

100

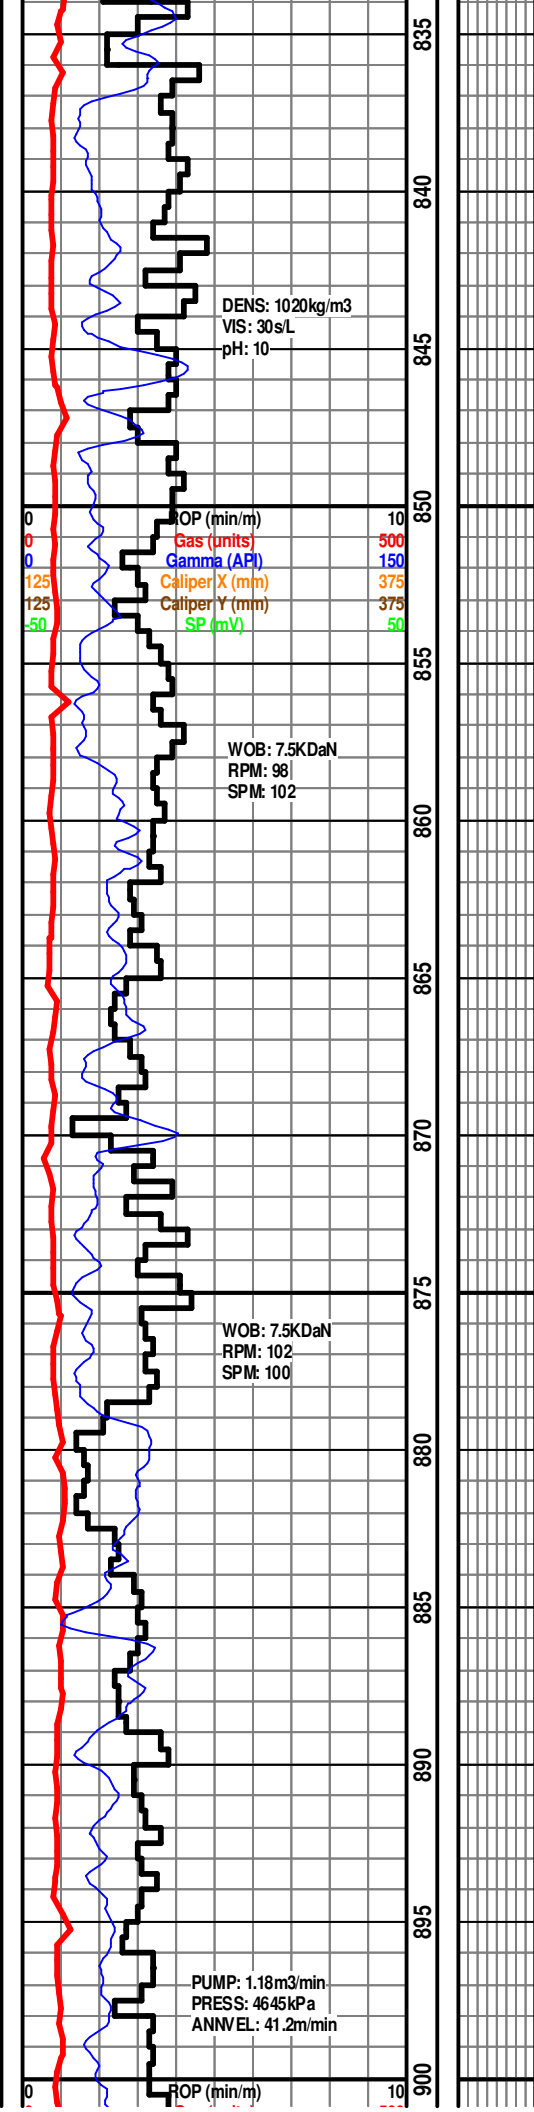

300





Sonic (usec/m)

100

300

Sonic (usec/m)


100

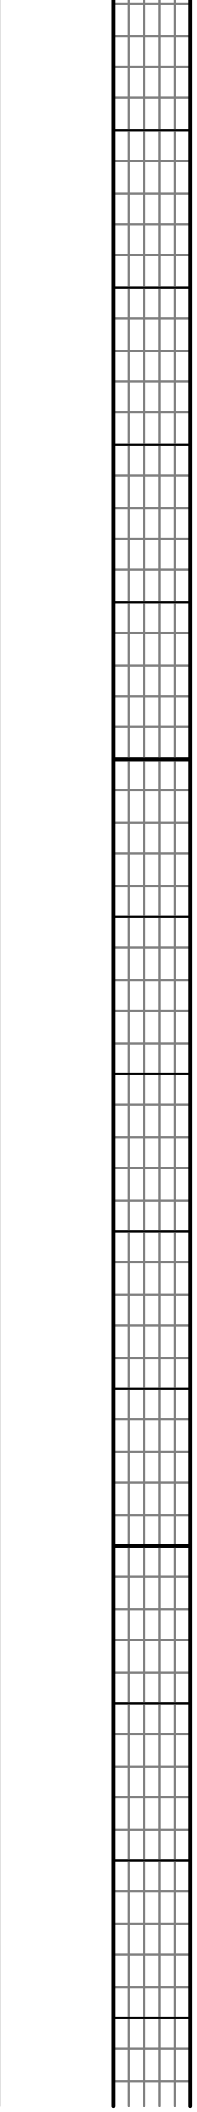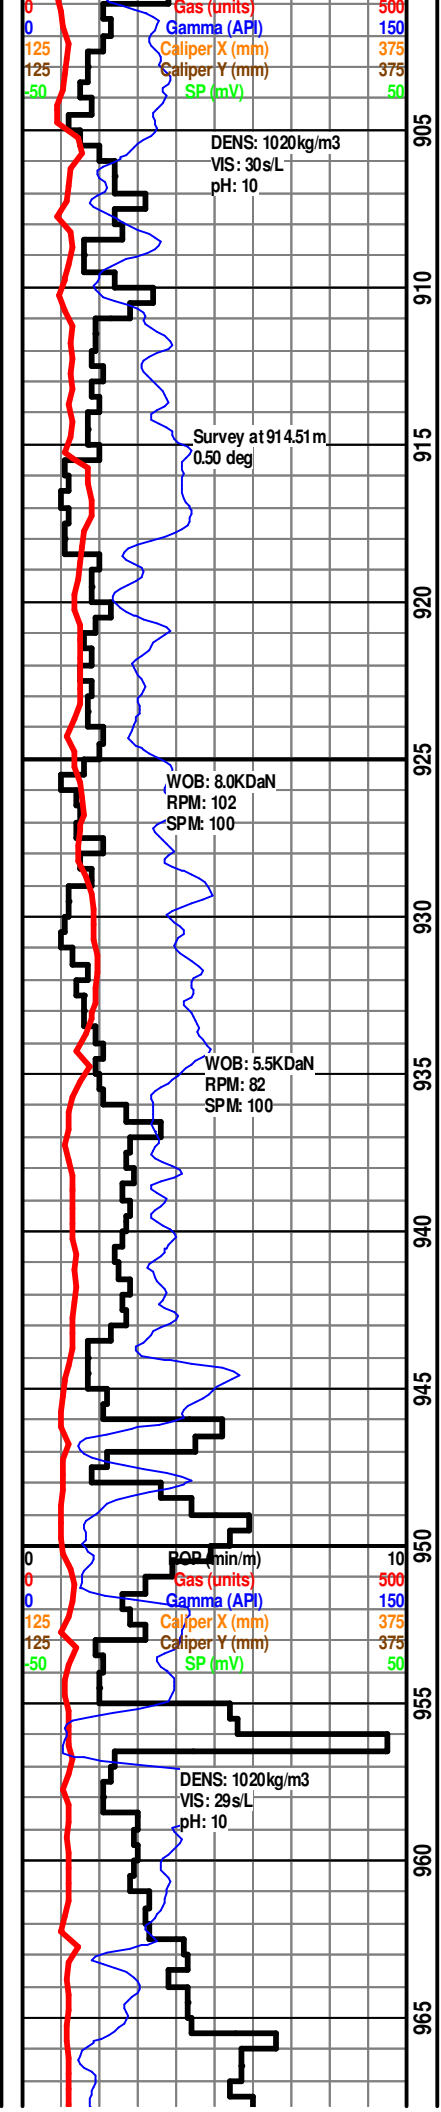



300

Sonic (usec/m)

100

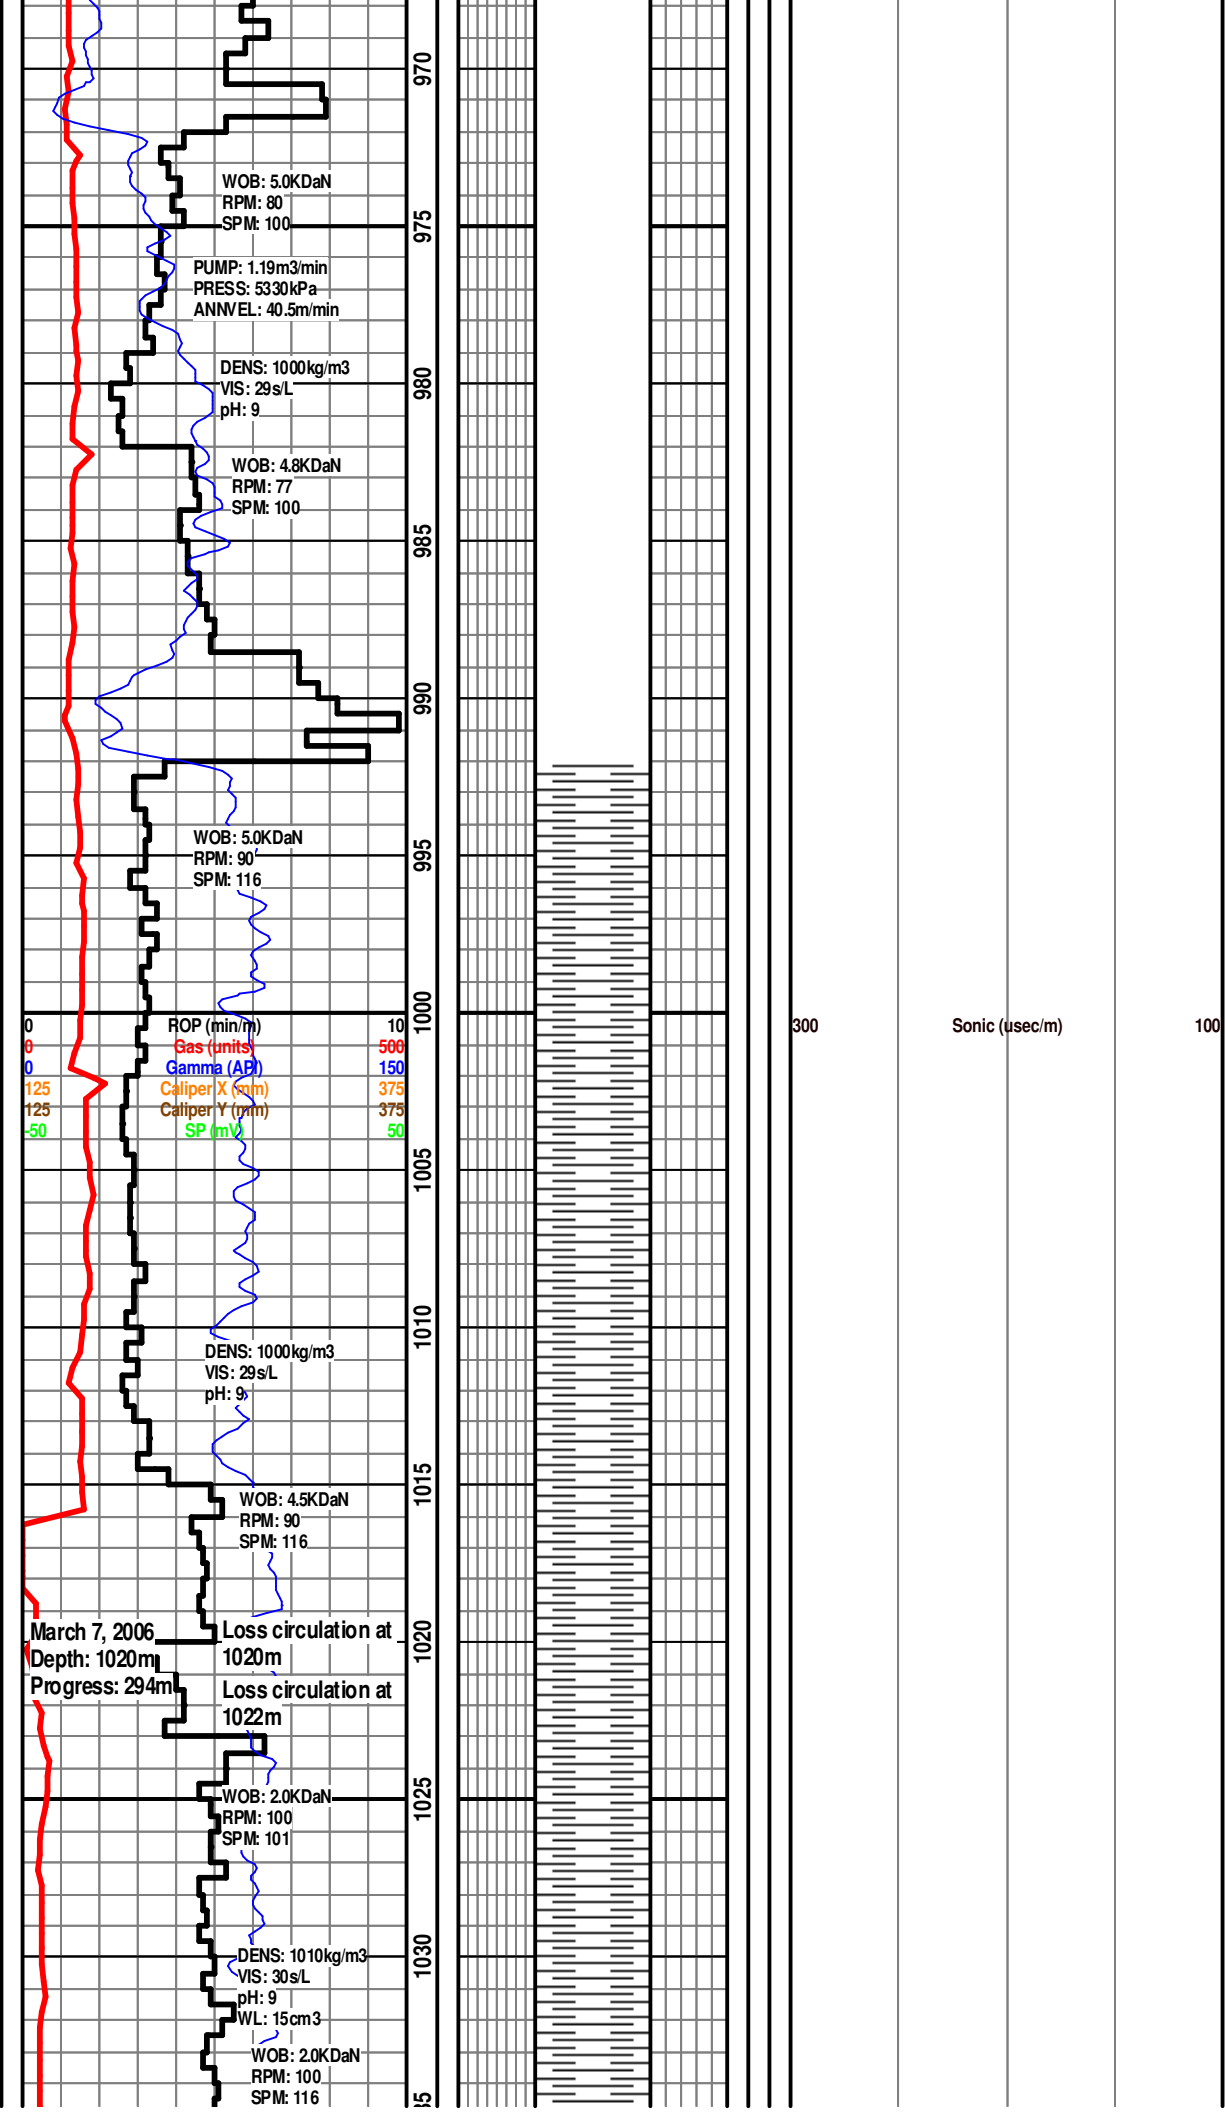

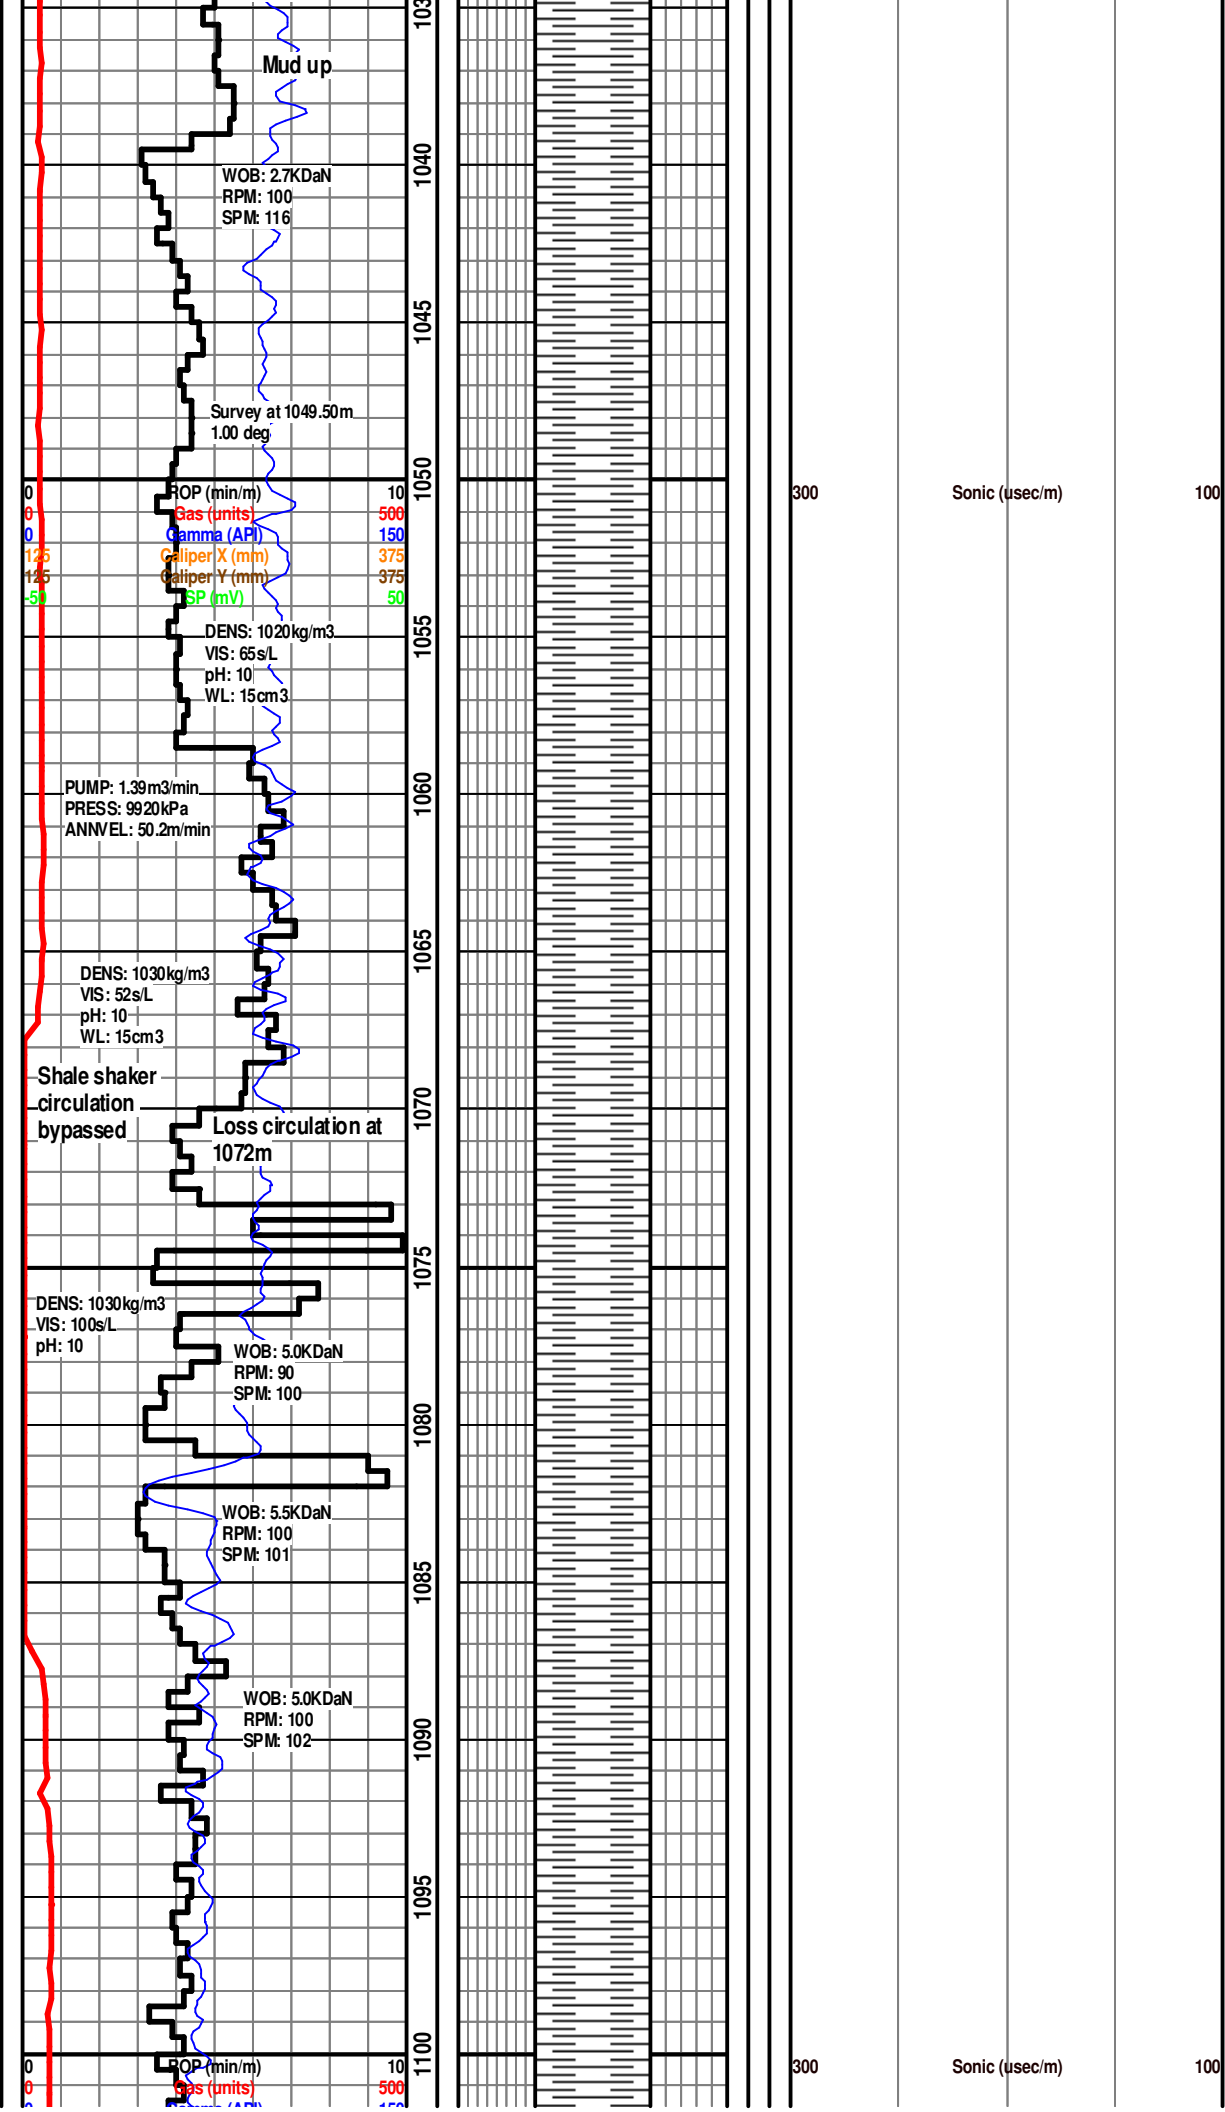



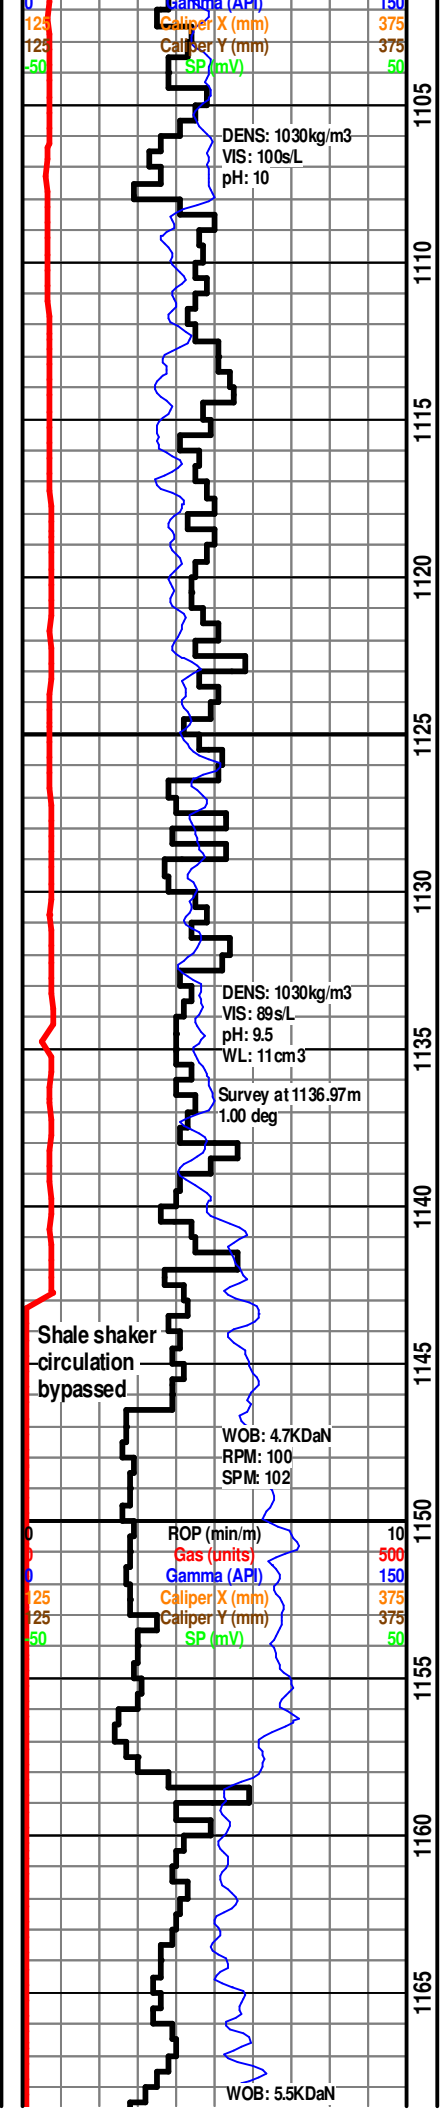


300

Sonic (usec/m)

100

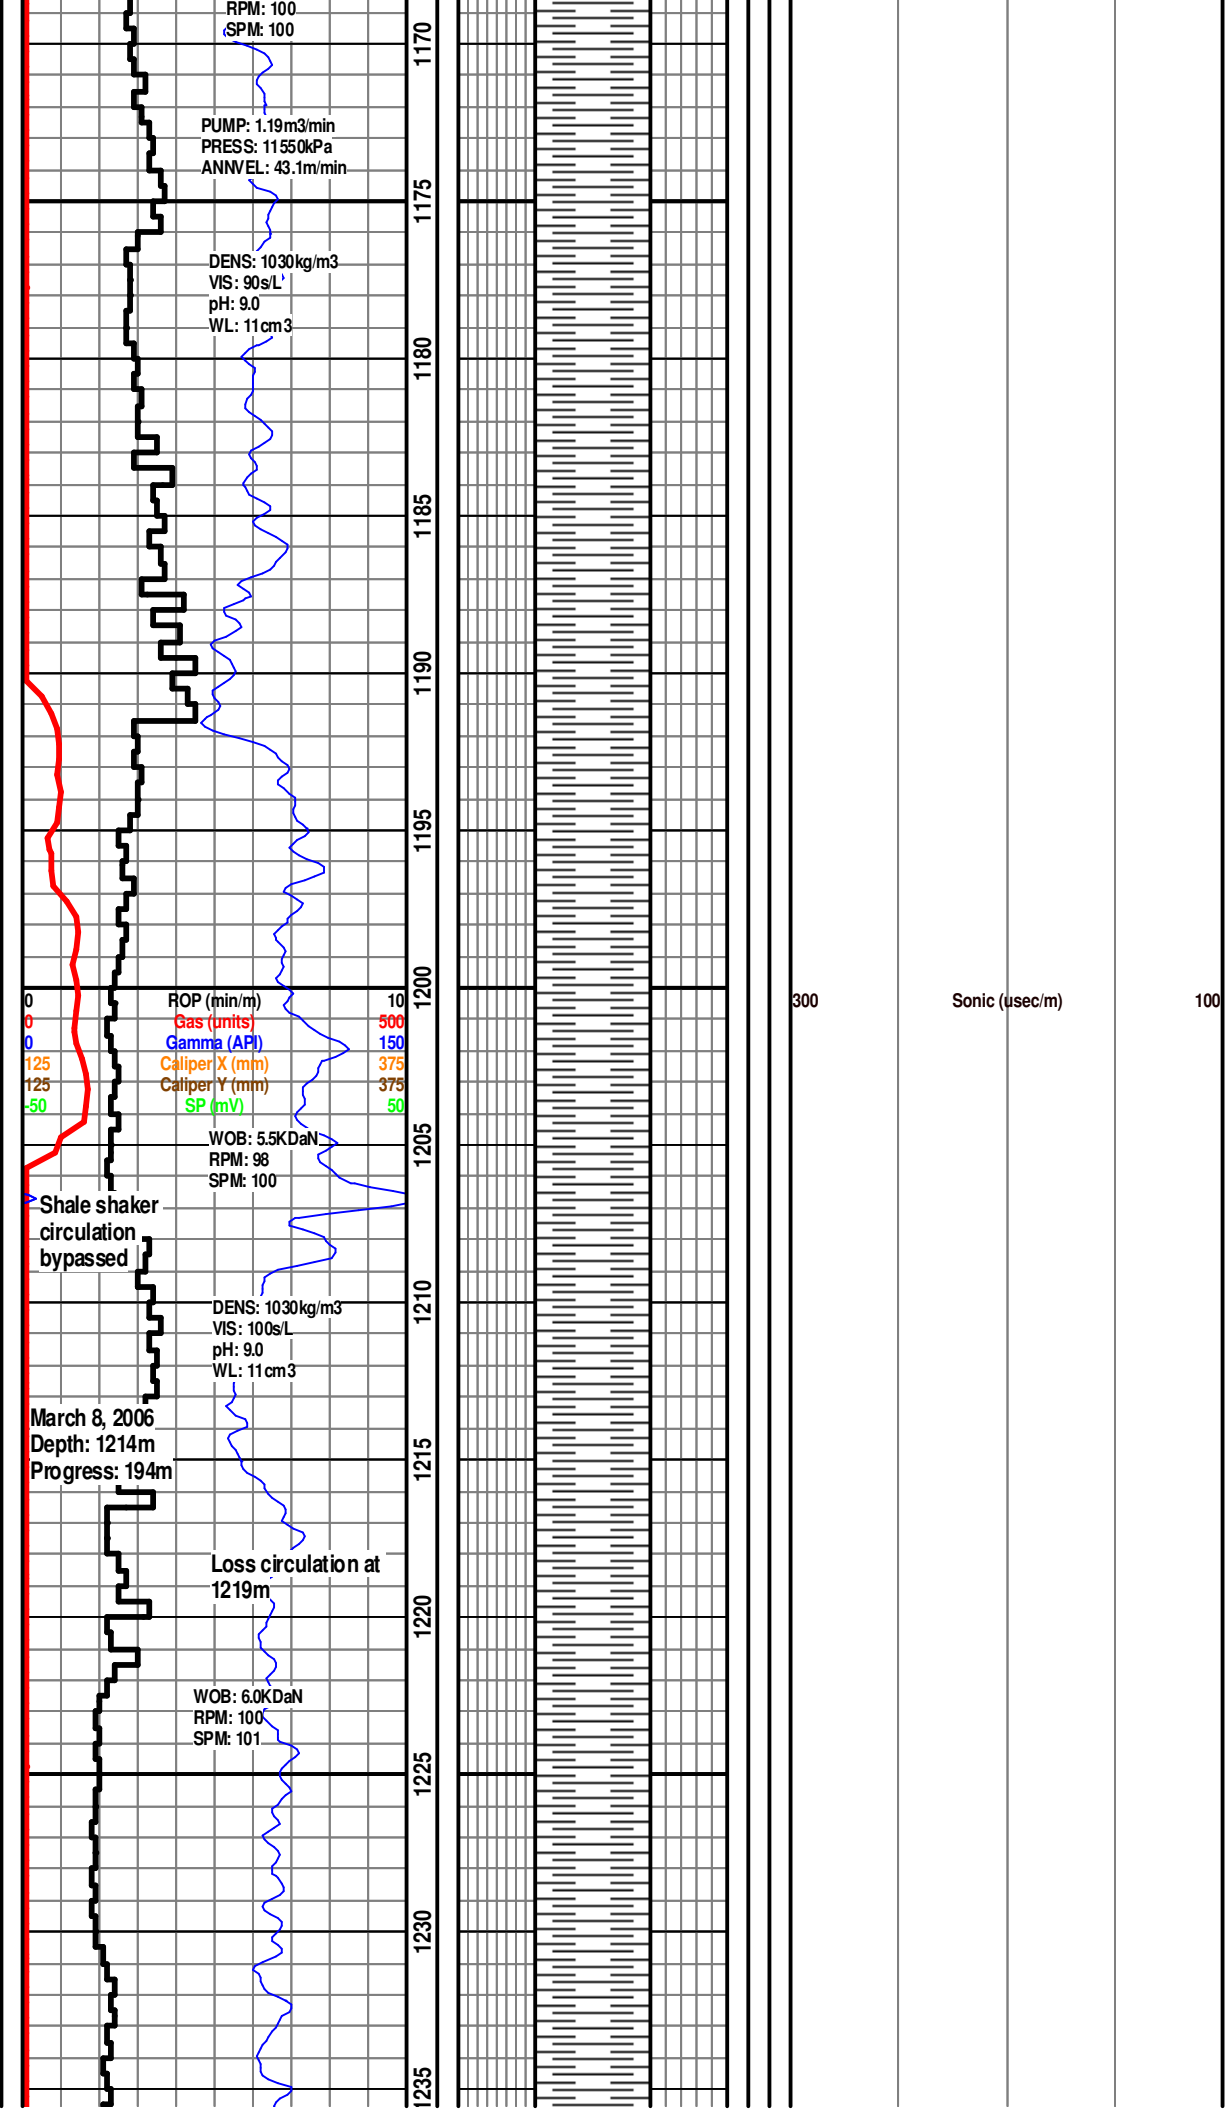

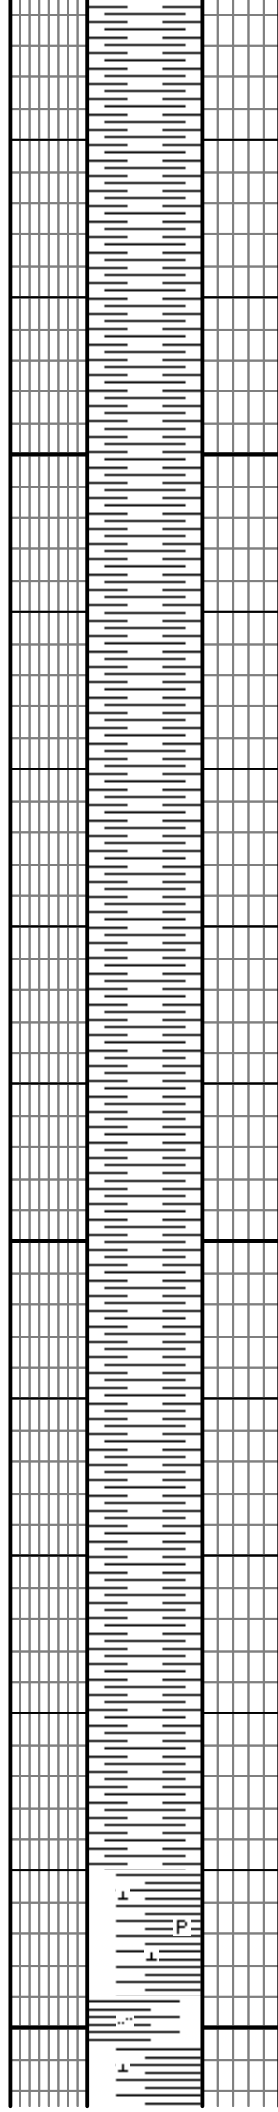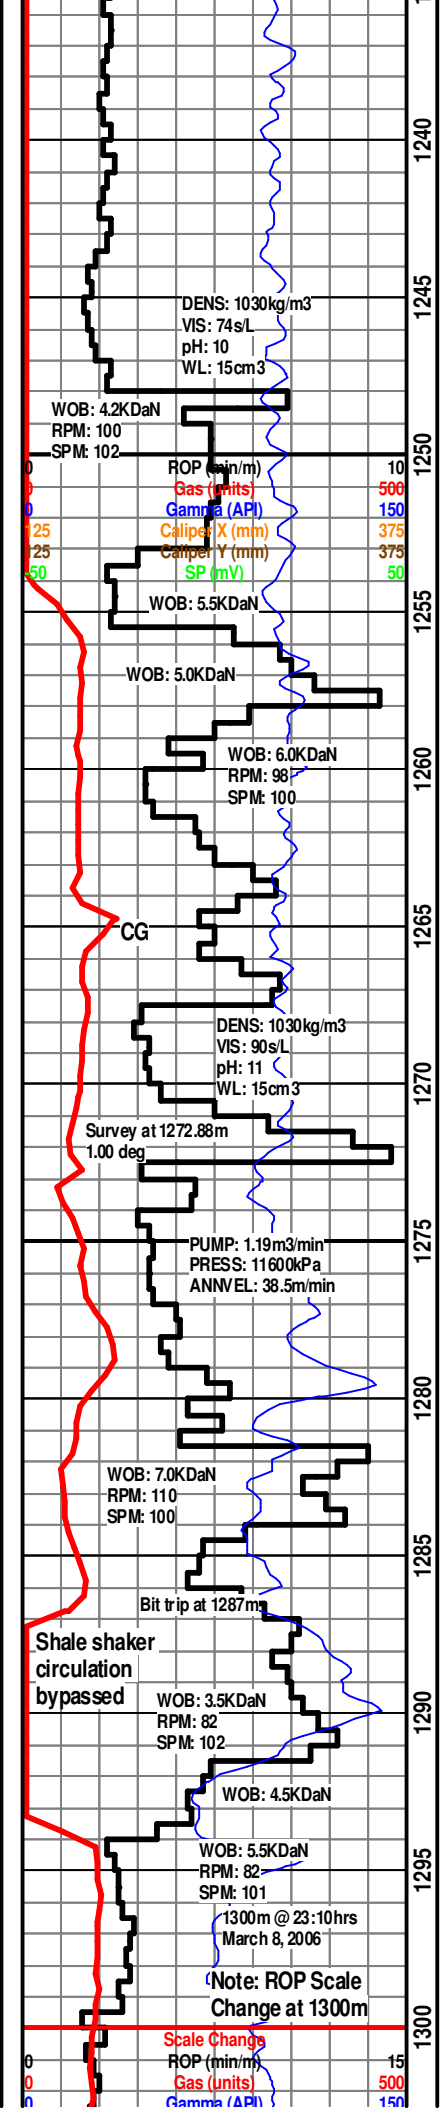

300

Sonic (usec/m)


100

300

Sonic (usec/m)

100

[1295 to 1305] SH 75%, lt gn gy, sub fis to plty, sl mmica, mod hd, calc, sub wxt tex, tr pyr, SH 25%, med gy, blk, hd, f to med tex, mmica ip, slty, tr desm pyr, non calc

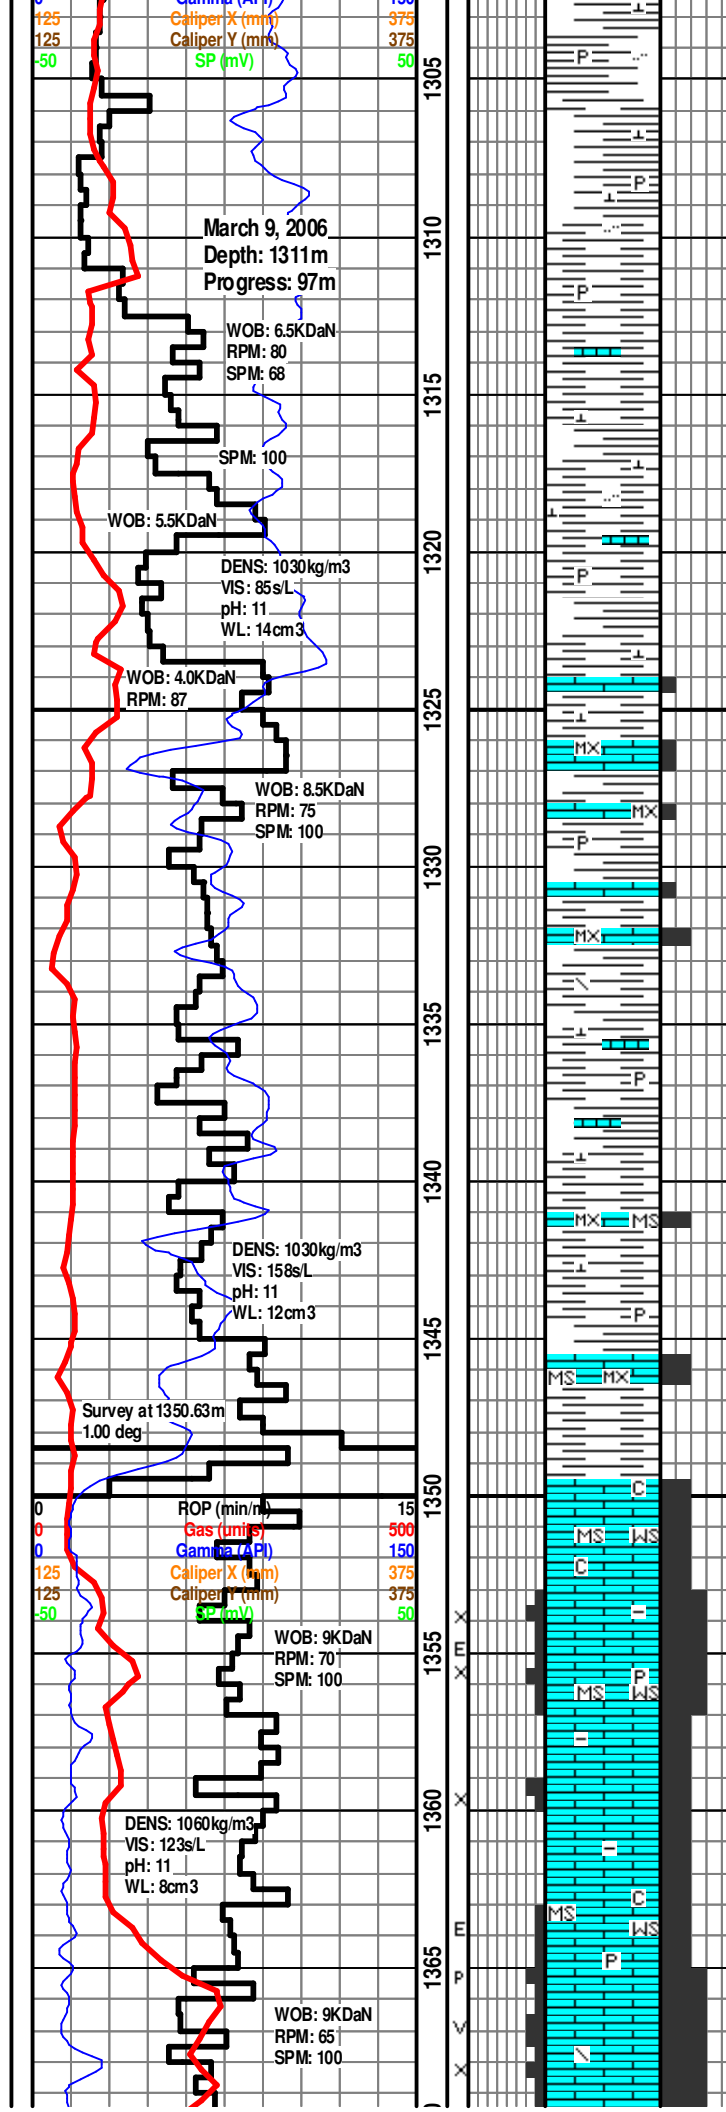

[1305 to 1315] SH 60%, lt gn gy, sub fis to plty, sl mmica, mod hd, calc, sub wxt tex, SH 40%, med gy, blkly, hd, f to med tex, mmica ip, slty, tr desm pyr, non calc

[1315 to 1324] SH 70%, lt to med gy, blkly to sub fis, mod hd, med tex, mmica ip, tr desm pyr, v calc, slty ip, SH 30%, lt gn gy, sub fis to plty, sub wxt tex, sl mmica, mod hd, calc

BEAVERHILL LAKE 1324 (- 548.7m SSL)

[1324 - 1335] SH 40%, lt gn gy, sub fis to plty, dull to sl mmica, hd, calc, sub wxt tex ip, tr pyr, SH 40%, med to dk gy, blkly, hd, mmica ip, slty, tr desm pyr, loc limy strks, f to med tex, LS 20%, off wht to lt gy, buff to rry lt brn, crptxl to occ v f xln, mudst, lmpy to blkly, tt, dns, ns

[1335 - 1349.5] SH 60%, med to dk gy, blkly, hd, mmica ip, slty, tr desm pyr, loc limy strks bcmg v calc, f to med tex ip, SH 20%, lt gn gy, sub fis to plty, dull to sl mmica, hd, sl calc, sub wxt tex ip, tr pyr, LS 20%, off wht to lt gy, buff to rry lt brn, crptxl to occ v f xln and rry f xln, mudst, lmpy to blkly, tt, dns, ns

SLAVE POINT 1349.5m (- 574.2m SSL)

300 Sonic (usec/m) 100

[1349.5 - 1357] LS 100%, crm to lt brn, mot, predy crptxl & mcnln, rry f xln, mudst to wkst, chky tex ip, lmpy to blkly, tr pyr, arg, dns with tr intxl & assumed rthy por, tt, questionable show

[1357 - 1363] LS 100%, crm to lt brn, mot, predy crptxl, rry v f xln, mudst to wkst, chky tex ip, lmpy to blkly, tr pyr, arg, dns with tr intxl, tt, no flor, nsoc, ns

[1363 - 1371] LS 100%, crm to tan, loc lt brn, mudst to wkst, predy crptxl to mcnln, occly f xln, chky tex ip, arg, tr bitns prgs, dns, loc p pp & vugy por, tr p intxl por & assumed rthy por, sply pale yel flor, wk yel gn ribn cut, wk hydrc od

