


DOWNHOLE DIAGRAM

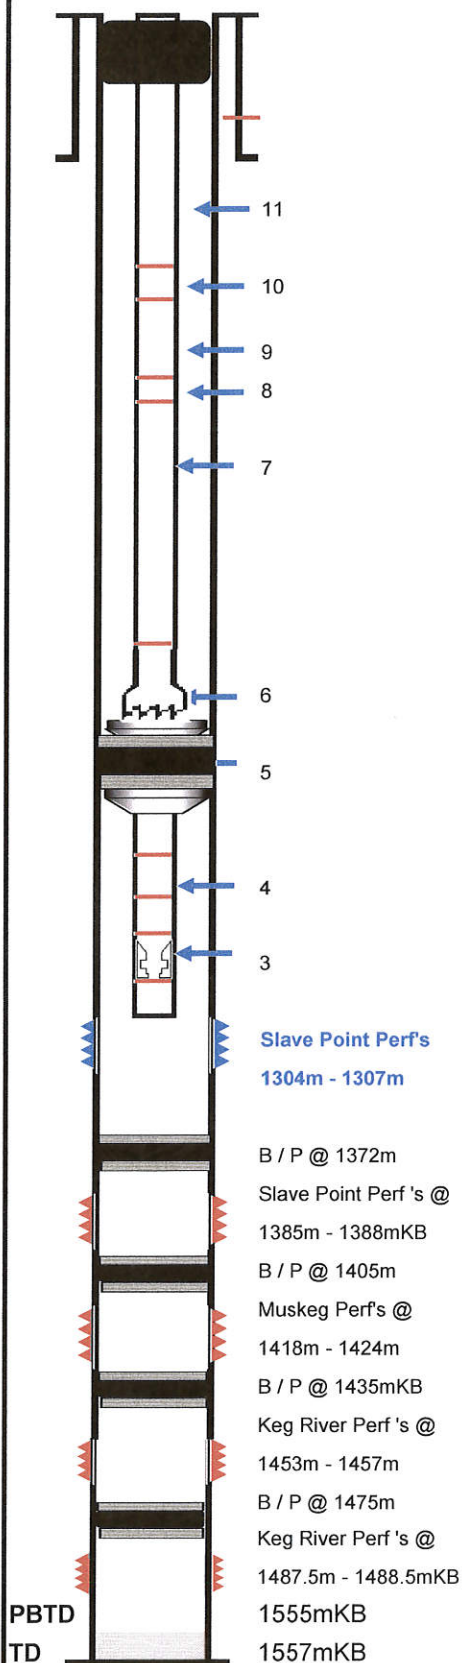

WELL NAME: Para et al Cameron A - 68			WID :		
Prepared by Kim MacLeod			Date : March 18 - 2007		
Elevations :					
KB [m]	746.12	KB to CF [m]	3.70	TD [m]	1575.00
GL [m]	742.42	PBTD [m]	1555.00		
Tubulars	Size [mm]	Wt - Kg/m	Grade	Landing Depth [m]	
Surface Casing	244.80	53.60	J - 55 , LT&C	393.50	
Product. Casing	139.70	23.07	J - 55 , LT&C	1572m	
Wellhead Description:					
Make / Type: BARBER Vetco Gray					
Size / Rating : 279mm X 21,000 kPa 179mm X 21,000 kPa					
Tubing String: 73mm , J - 55 , 9.67 Kg / m (m) (m)					
Date of Tubing Description:				Length	Top @
No.Jts.	Description		K.B.--Tbg. Flg.	3.22	KB Depth
1	RE - ENTRY GUIDE , 73mm			0.14	1310.88
2	1 - JOINT TUBING , 73mm , J - 55 , 9.67 Kg / m			9.64	1301.24
3	1 - R NIPPLE , 57,2mm C / W 55.8mm NO / GO			0.31	1300.93
4	3 - JOINT TUBING , 73mm , J - 55 , 9.67 Kg / m			26.97	1273.96
5	CARDIUM DGP 139mm , DOUBLE GRIP			1.47	1272.49
6	ON / OFF , C / W PROFILE 58.7mm			0.58	1271.91
7	130 - Joint's Tubing , 73mm , J - 55 , 9.67 Kg / m			1245.64	26.27
8	1 - PUP JOINT , 73mm , J - 55 , EUE			3.09	23.18
9	1 - JOINT TUBING , 73mm , J - 55 , 9.67 Kg / m			9.56	13.62
10	1 - PUP JOINT , 73mm , J - 55 , EUE			0.68	12.94
11	1 - JOINT TUBING , 73mm , J - 55 , 9.67 Kg / m			9.49	3.45
12	TUBING HANGER , 179mm X 73mm			0.23	3.22
	KB - THF			3.22	0.00
				0.00	0.00
				0.00	0.00
	OPSCO SLICKLINE A - 03 PLUG SET @ 88m			0.00	0.00
	ON MARCH 17 - 2007				0.00
					0.00
	PLUG IN PLACE IN PACKER , FSG PLUG				
					0.00
					0.00
	Bottom of Tubing mKB			0.00	
Perforations :					
Zone	SLAVE POINT		Interval :	1304m - 1307mKB	
Zone			Interval :		
Zone			Interval :		
Stimulation :					