


PARA ET AL CAMERON L-73

60° 10' N, 117° 15' W

WID: 2033

Bottom Hole Configuration - As Drilled

KB: 774.8 m
GL: 770.8 m

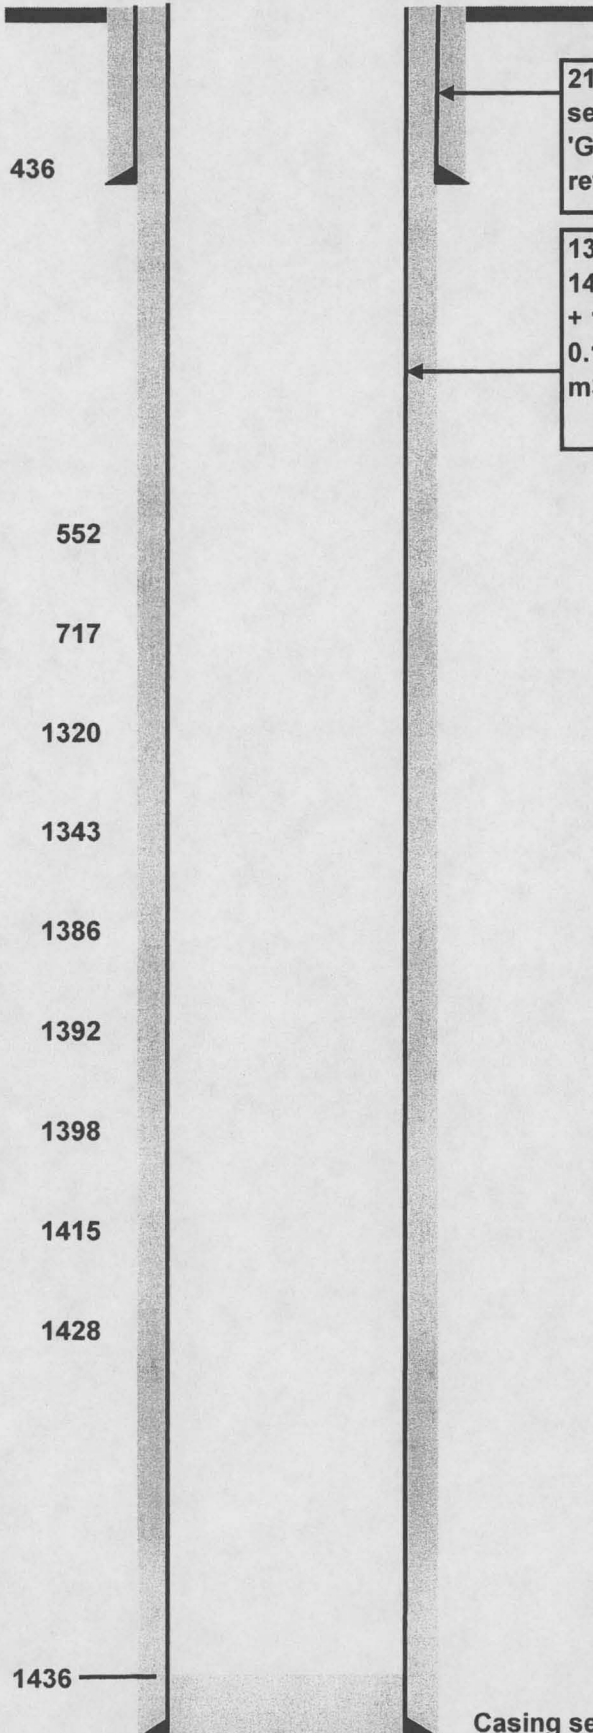

219.1 mm, 35.7 kg/m, J-55 ST&C casing set at 436 mKB. Cemented with 38 t class 'G' cement + 1.5% CaCl₂. 4.0 m³ cement returns to surface.

139.7 mm, 23.07 kg/m, J-55, LT&C set at 1450 mKB. Cemented with 23.0 t ThixLite + 1% SMS and 11.0 t Expandomix LWL + 0.1% CFL-3 + 0.2% LTR + 0.2% SPC-II. 6.0 m³ cement returns to surface.

FORMATION TOPS

Wabamun	552
Fort Simpson	717
Beaver Hill Lake	1320
Slave Point	1343
F4 Marker	1386
Watt Mountain	1392
Sulphur Point LS	1398
Sulphur Point Dol	1415
Muskeg	1428

Total Depth = 1450

Casing set at 1450 mKB

PARA ET AL CAMERON L-73

60° 10' N, 117° 15' W

WID: 2033

Bottom Hole Configuration (as of March 22, 2007)

KB: 774.8 m
GL: 770.8 m

