

DOWNHOLE DIAGRAM

WID : 2063

Date Start: Feb 23 - 2010

Elevations :

KB	[m]	782.60	KB to CF [m]	4.60	TD [m]	1473.00
GL	[m]	778.00	PBTD [m]	1455.00		
Tubulars	Size [mm]	Wt - Kg/m	Grade	Landing Depth [m]		
Surface Casing	219.10	35.70	J - 55, ST&C	377m		
Product Casing	139.70	20.80	J - 55, ST&C	1473.00		

Wellhead Description:

Make / Type: BARBER Vetco Gray

Size / Rating : 279mm X 21,000 kPa 179mm X 21,000 kPa

Tubing String:	73mm , J - 55 , 9.67 Kg / m , yellow band	(m)	(m)
----------------	---	-----	-----

Date of Tubing Description:	Feb 27 - 2010	Length	Top @
------------------------------------	----------------------	---------------	--------------

No.Jts.	Description	K.B.—Tbg. Fig.	4.05	KB Depth
			0	0.00
			0	0.00
			0.00	0.00
			0	0.00
			0	0.00
			0	0.00
			0	0.00
			0.00	0.00
			0.00	0.00
			0.00	0.00
			0.00	0.00
			0.00	0.00
			0.00	0.00
				0.00
	Bottom of Tubing mKB		0.00	

10m class D cement

Bridge Plug set ②
1471mKB

Sulphur Point Perf's

1421.5m - 1425mKB

PBTD
T.D

1455mKB
1473mKB


SUCKER ROD'S FROM BOTTOM UP

1						
2						
3						
4						
5						
6						

Zone	Sulphur Point Dolomite	Interval :	1421.5m - 1425mKB
Zone		Interval :	
Zone		Interval :	

Acid Squeeze

DOWNHOLE DIAGRAM

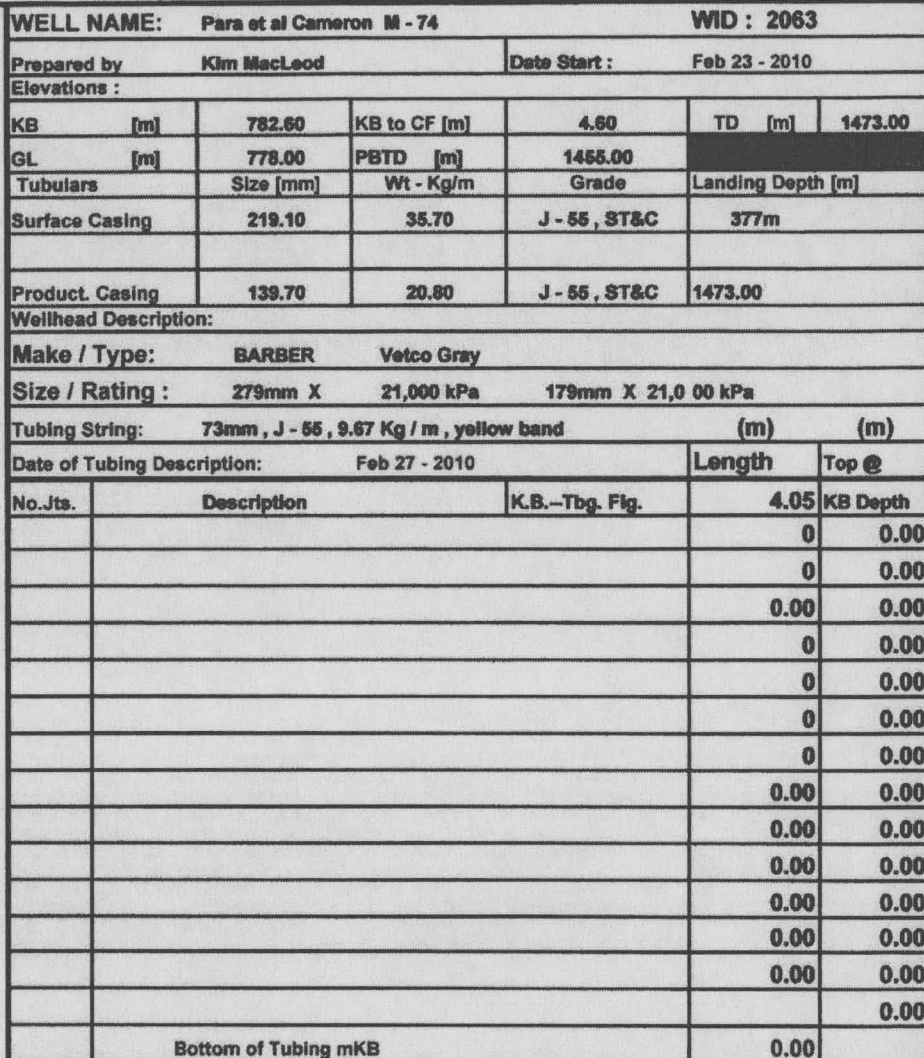

SUCKER ROD'S FROM BOTTOM UP

[illegible]