



Paramount
resources ltd.

Schematic - Current

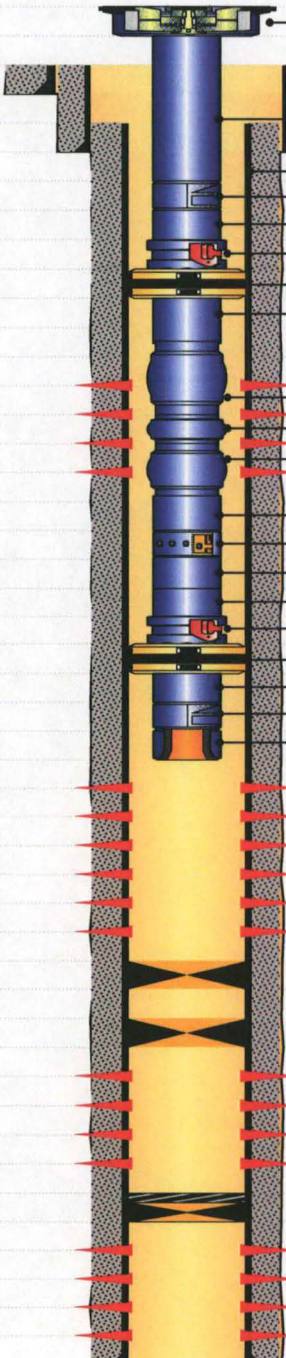
Well Name: PARA ET AL CAMERON N-28/1

API/UWI 300/N-28/6010-11730/1	Surface Legal Location N-28 6010' 11730'	License # 0001753	Field Name	State/Province NT
Well Configuration Type	Original KB Elevation (m)	KB-Ground Distance (m)	KB-Casing Flange Distance (m)	KB-Tubing Head Distance (m)

Most Recent Job

Job Category Completion/Workover	Primary Job Type Completion	Secondary Job Type Other	Start Date 3/5/2011	End Date 3/12/2011
-------------------------------------	--------------------------------	-----------------------------	------------------------	-----------------------

TD: 1,590.00

Original Hole, 4/12/2011 10:47:42 AM				
MD (mKB)	TVD (mKB)	Incl (°)	DLS	Vertical schematic (actual)
-4.1			DLS (° ... * — * * — *	 1-1; Tubing Hanger; 177.8; 62.0; -4.10--3.90; 0.20 1-1; Casing Joints; 298.5; 281.5; 4.10-244.00; 239.90 2-1; Casing Joints; 219.1; 205.7; 4.10-834.00; 829.90 1-2; Tubing; 73.0; 62.0; -3.90-1,318.79; 1,322.69 3-1; Casing Joints; 139.7; 125.7; 732.00-1,590.00; 858.00 1-3; 58.67mm X Profile Nipple; 73.0; 1,318.79-1,319.12; 0.33 1-4; 3 joints of Tubing; 73.0; 62.0; 1,319.12-1,347.77; 28.65 1-5; Cardium NTF On-Off Tool C/W 58.7mm X Profil; 85.0; 1,347.77-1,348.20; 0.43 1-6; Cardium QDG Packer; 126.0; 1,348.20-1,349.40; 1.20 1-7; Tubing; 73.0; 62.0; 1,349.40-1,352.45; 3.05 1-8; Blast Joint; 86.0; 1,352.45-1,355.50; 3.05 1-9; Blast Joint; 86.0; 1,355.50-1,358.58; 3.08 Perforated; 1,353.00-1,361.50; 4/12/2011 1-10; Blast Joint; 86.0; 1,358.58-1,361.66; 3.08 1-11; Tubing pup joint; 73.0; 62.0; 1,361.66-1,365.41; 3.75 1-12; CXU Sliding Sleeve C/W 58.7mm X profile; 73.0; 1,365.41-1,366.26; 0.85 1-13; Tubing; 73.0; 62.0; 1,366.26-1,369.12; 2.86 1-14; Tubing; 73.0; 62.0; 1,369.12-1,378.67; 9.55 1-15; Cardium NTF On-Off Tool C/W 58.7mm X Profile; 85.0; 1,378.67-1,379.10; 0.43 1-16; Cardium QDG Packer; 126.0; 1,379.10-1,380.30; 1.20 1-17; Tubing; 73.0; 62.0; 1,380.30-1,389.85; 9.55 1-18; 58.67mm X Profile Nipple; 73.0; 1,389.85-1,390.18; 0.33 1-19; Wireline Guide; 73.0; 1,390.18-1,390.30; 0.12 Perforated; 1,404.50-1,406.00; 4/12/2011 Perforated; 1,409.00-1,413.00; 4/12/2011 Perforated; 1,415.00-1,420.00; 4/12/2011 Perforated; 1,511.00-1,518.00; 4/12/2011 Perforated; 1,521.00-1,526.00; 4/12/2011 Perforated; 1,538.00-1,539.00; 4/12/2011 Perforated; 1,541.00-1,543.00; 4/12/2011
4.1				
732.0				
1,318.8				
1,347.8				
1,349.4				
1,352.5				
1,355.5				
1,361.5				
1,365.4				
1,369.1				
1,379.1				
1,389.9				
1,390.3				
1,406.0				
1,413.0				
1,420.0				
1,480.5				
1,500.5				
1,518.0				
1,526.0				
1,537.0				
1,539.0				
1,543.0				