

Exist

DOWNHOLE DIAGRAM

WELL NAME: Paramount et al Bovie C-76

Prepared by Randy Hemmingsen

Date 98/03/04

Elevations:

KB [m]	433.31	KB to CF [m]	5.90	TD [m]	3222.00
GL [m]	426.80	PBTD [m]	3196.00		
Tubulars	Size [mm]	Wt - Kg/m	Grade	Landing Depth [m]	
Surface Casing	339.70	81.10	K55	453.00	
Intermed. Casing	244.50	69.60	L80	1713.00	
Product. Casing	177.80	43.20	L80	2897.00	

Wellhead Description:

Make / Type: ABB Vetco Gray

Size / Rating : 339 X 279.4 X 35 MPa

COMMENTS

The well was circulated to inhibited fresh water.

Window cut from 2658 to 2675 mKB.

A cement plug was ran from 2529 to 2675 mKB.

A permanent bridge plug was set @ 2495 mKB.

Cement retainer set @ 2720 mKB.

Old perfs @ 2625 to 2626 & 2725 to 2726 mKB (Unable to squeeze in cement)

Bridge plug set @ 2931 mKB, capped w/ 175 +/- m of thermal cement.

Old perf interval - 2900 - 2921 & 2923 - 2926 mKB.

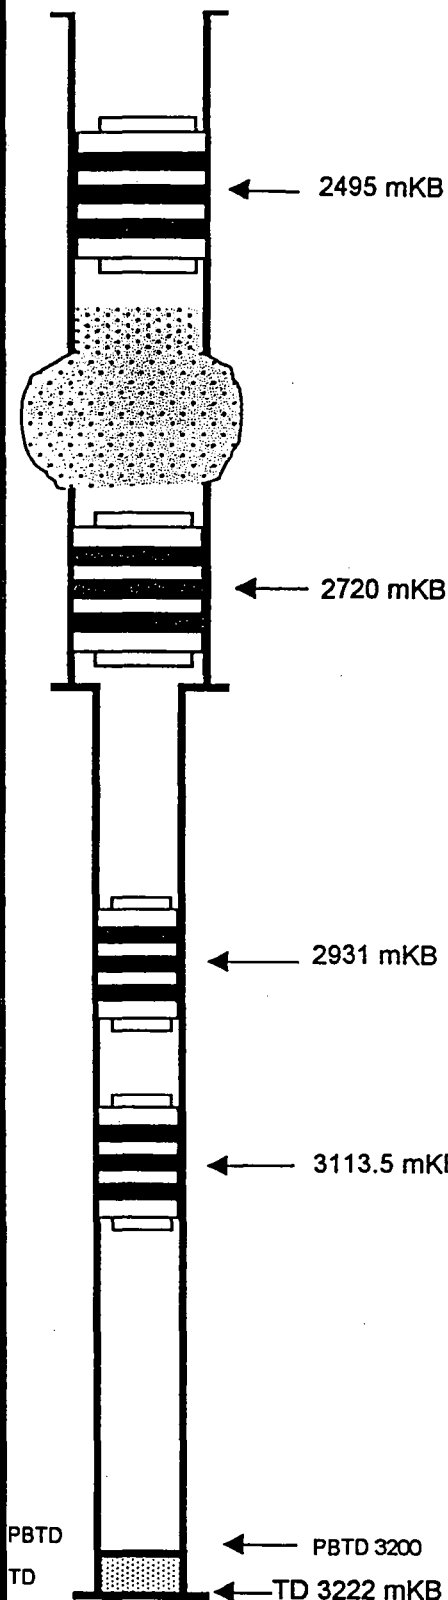
Permanent bridge plug set @ 2934 mKB

Old perfs - 2986.5 - 2989.5, 2993 - 2995 .5, 3007.5 - 3031.5, 3037.3 - 3065.3, 3066 - 3074, 3077 - 3081 mKB.

Permanent bridge plug set @ 3113.5 mKB.

Old perfs - 3118.5 - 3155 mKB

Old perfs - 3163.5 - 3174.5 mKB

PBTD
TD

PBTD 3200

TD 3222 mKB