




PETREL CONSULTANTS LTD.	
PROCESSED FOR NSM RESOURCES LTD. REVERSE POLARITY	
AREA: LITTLE BEAR LINE: 113 LOCATION: N.W.T. SW 1129 SHOT POINTS 101 NE	
FIELD RECORDING	
DATE: MARCH 1983 RECORDED BY: WESTERN GEOPHYSICAL ENERGY SOURCE: DYNAMITE 1 HOLE AT 14 M RECORDER TYPE: DFG-U SAMPLE RATE 2 NS. GAIN CONTROL: FLOATING POINT FIELD FILTER: 12 - 120 HZ GEOPHONES/GROUP: 9 AT 3.75 M TYPE: MARK 14 HZ COVERAGE 1200Z SHOT INT. 134 M GROUP INT. 33.5 M 1600 - 33.5 X 33.5 - 1600	
COMPUTATIONS	
STRUCTURAL DATUM 500 M REPLACEMENT VELOCITY 3840 M/SEC	
PROCESSING PARAMETERS	
DATE: MAY 1983 1. DEMULTIPLY SAMPLE RATE 4 NS. 2. TRACE GATHER 3. AMPLITUDE RECOVERY 4. DECONVOLUTION TYPE: SPIKING GATE: 800 - 2200 NS. OPERATOR LENGTH: 72 NS. PRE-WHITENING: 5 % WELL TOT 5. WNO 6. STATIC CORRECTIONS ELEV/TOP/DRIFT 7. BRUTE STACK 8. COMMON OFFSET STACK 9. RNNO 10. AUTOMATIC RESIDUAL STATICS GATE: 500 - 2000 NS. 11. FIRST BREAK MUTE TIME 0 DIST. 272 TIME 450 DIST. 386 TIME 770 DIST. 544 TIME 1400 DIST. 1632 12. STACK 1200Z 13. FILTER 0-1000 NS., 20/24-70/NS 1200-3000 NS., 16/23-65/75 14. TRACE EQUALIZATION 15. WAVE EQUATION MIGRATION 90% OF RMS VELOCITIES 16. FILM DISPLAY 24 TR/IN 7.5 IN/SEC	

0020-N9-3E

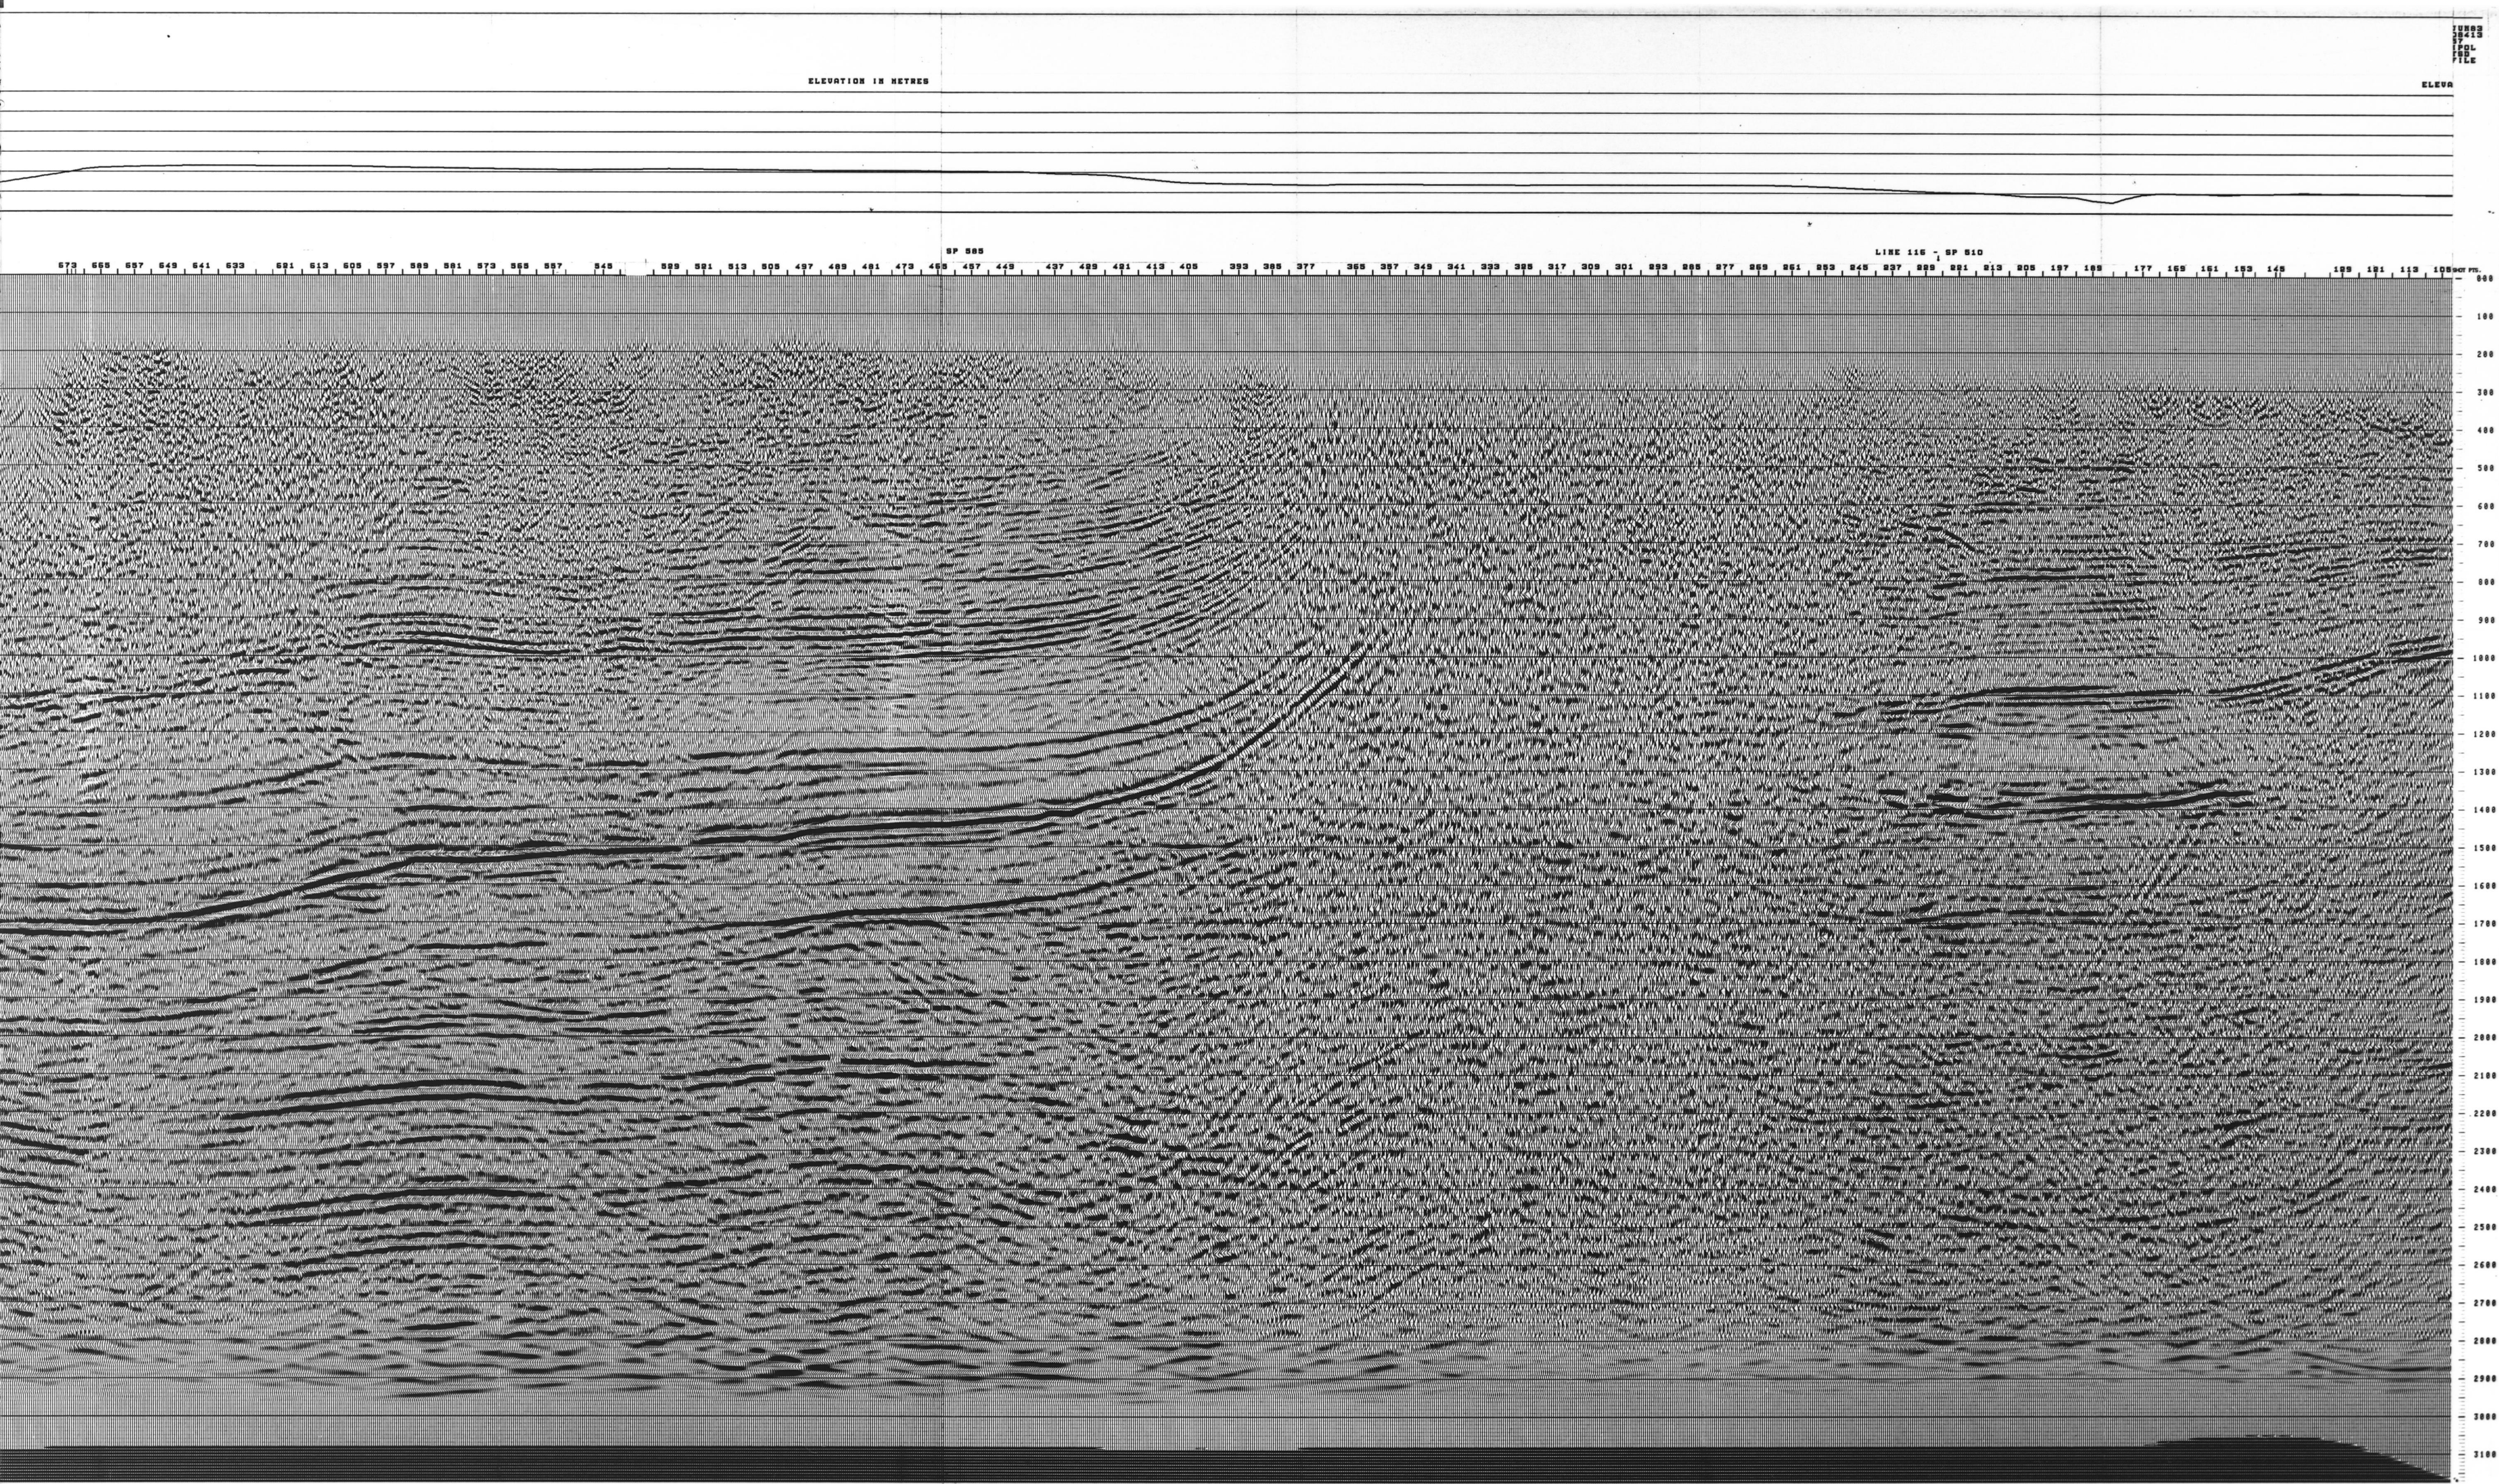

2060 Watley Rd
Ottawa, Ont.
Canada K1G 3P5
Tel: (613) 731-9571
Cable: TERRA
Tele: 063-3502

PROJ. NO. 9 2 2 9 - N 9 - 3 E

LINE NO. 1 1 3

PART NO. 2 OF 2

R.R. 10X

