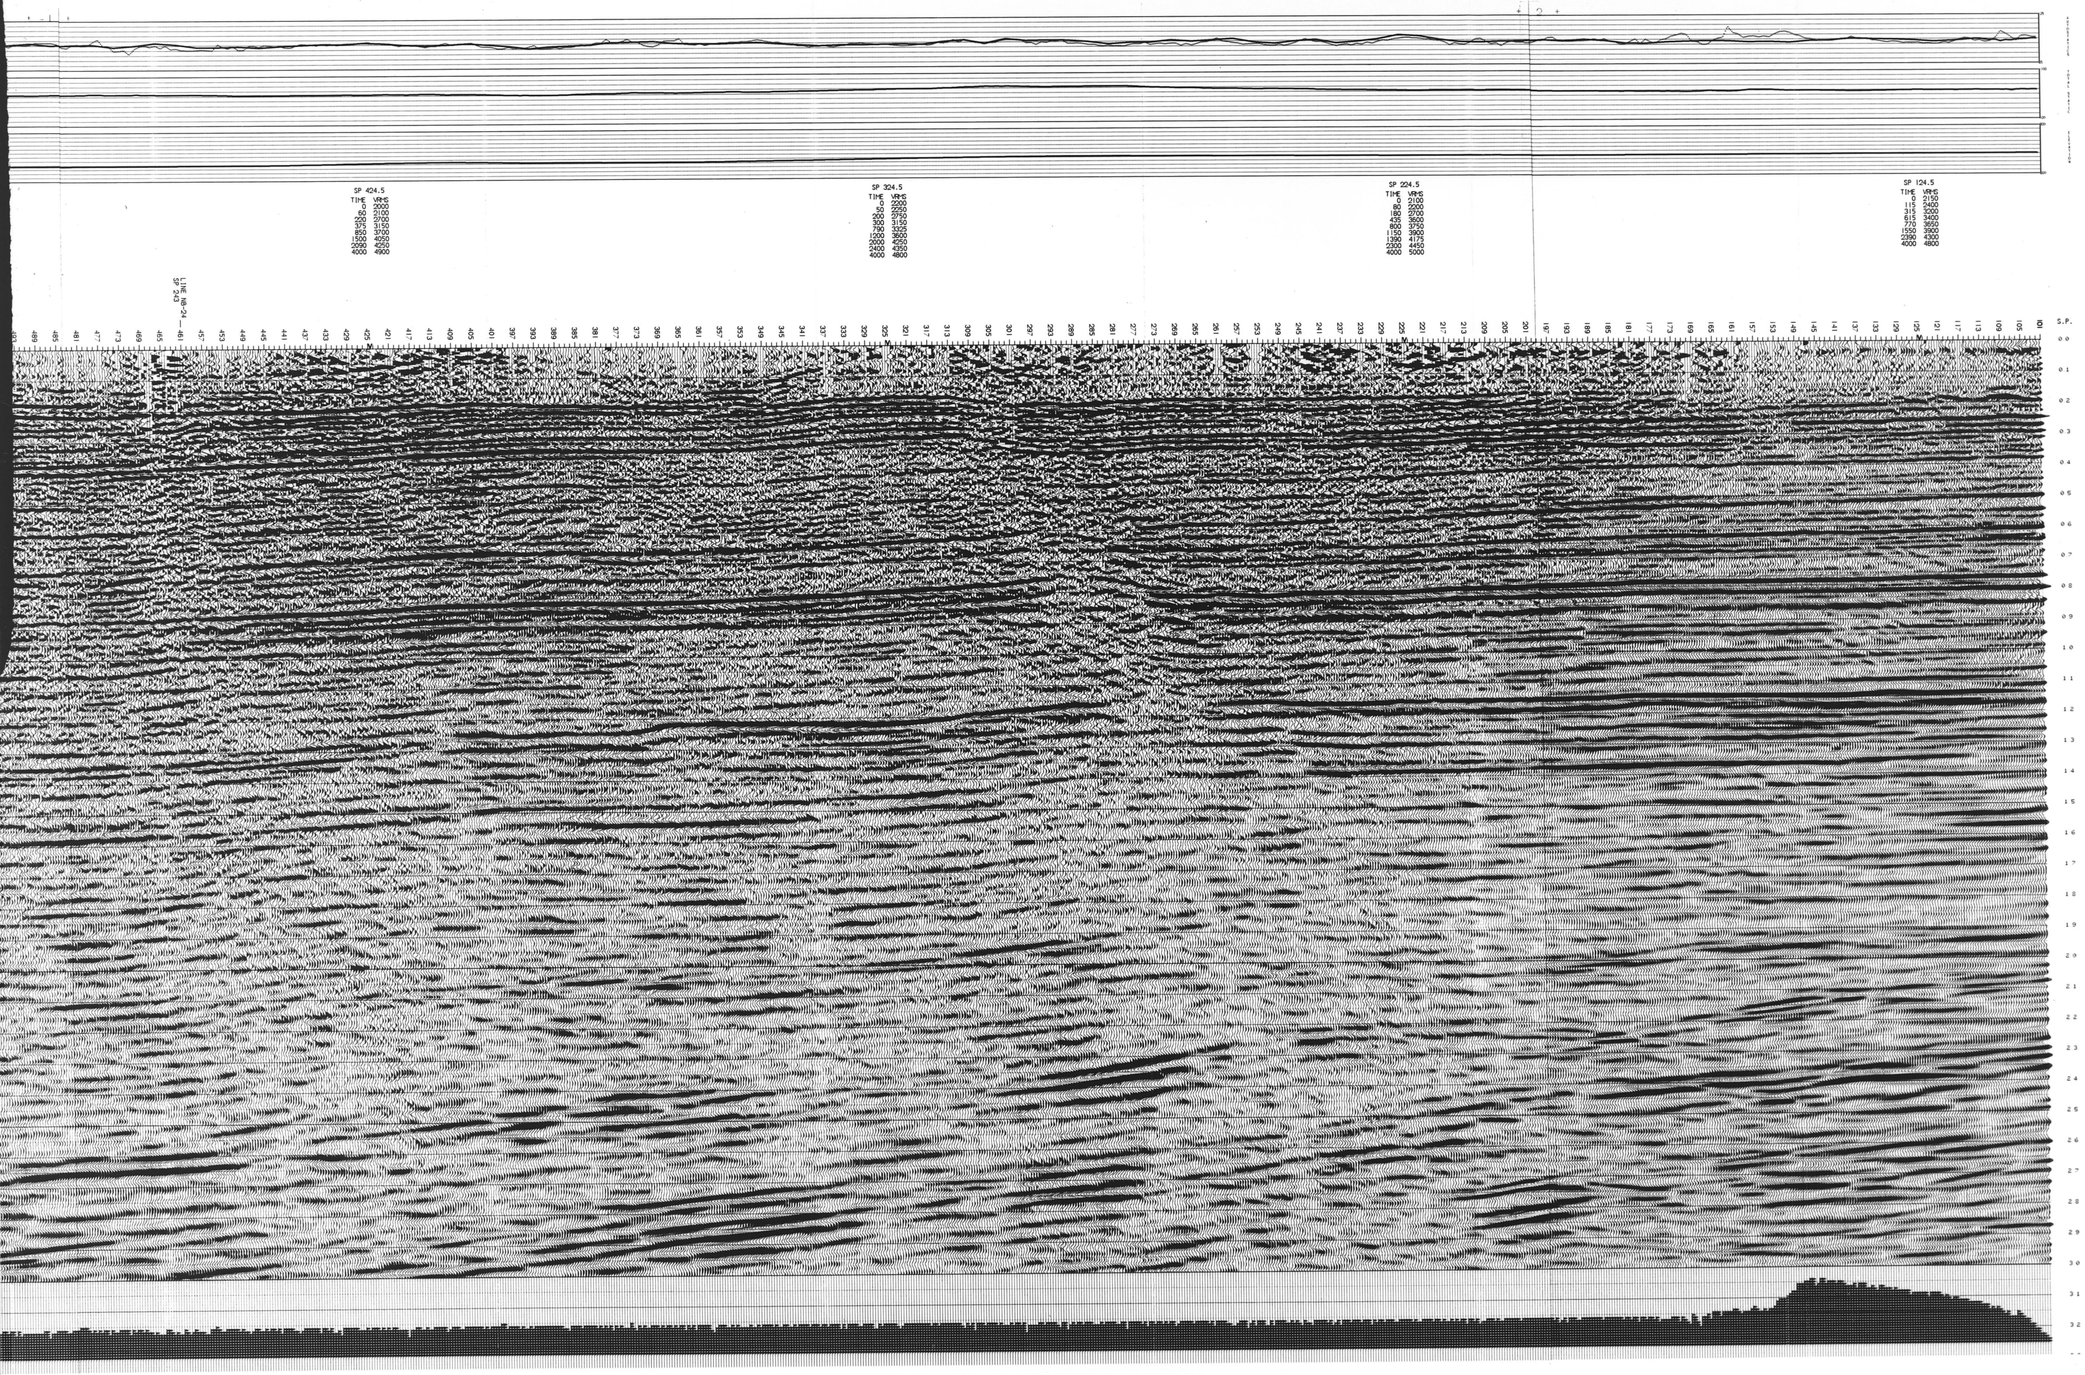

9229-N10-10E

LINE NB-17

S.P. 776-101

N.E.

MIGRATED STRUCTURAL STACK

NORTHCOR ENERGY LTD

BOVIE LAKE

SEFEL GEOPHYSICAL
SEISMIC DATA PROCESSING
CALGARY CANADA

DATE PROCESSED
JUNE 1984

Q.C. RN

FIELD RECORDING

DATE SHOT	MARCH 1984
SHOT BY	SEFEL GEOPHYSICAL LTD. PARTY NO 506
SOURCE TYPE	DYNAMITE
SOURCE PATTERN	SINGLE HOLE
CHARGE SIZE	2 KG AT 11 M
GEOPHONE TYPE	GEOSPACE-10 HZ
GEOPHONE PATTERN	9 AT 3 M INTERVALS
INSTRUMENTS	MDS-10 96 TRACE
FORMAT	SEGB
RECORDING FILTER	12/18 - 125/72 HZ
RECORD LENGTH	4 SEC
SAMPLE INTERVAL	2 MS
GROUP INTERVAL	25 M
SHOT POINT INTERVAL	100 M
SPREAD GEOMETRY	1200-25-X-25-1200 M

DIGITAL PROCESSING

1 DEMULTIPLEX WITH GAIN REMOVAL	
PROCESSING SAMPLE RATE	2 MS
2 INSTRUMENT PHASE COMPENSATION	
3 GEOPHONE PHASE COMPENSATION	
4 CDP TRACE GATHERS	1200 PERCENT
5 AUTOMATIC GAIN CURVE APPLICATION	
6 SPIKING DECONVOLUTION	
OPERATOR DESIGN WINDOW	
MIN OFFSET	150-1650 MS
MAX OFFSET	800-2300 MS
OPERATOR LENGTH	60 MS
PREWHITENING	1 PERCENT
7 WEATHERING STATICS	
DATUM ELEVATION	500 M ASL
DATUM VELOCITY	3700 M/SEC
WEATHERING VELOCITY	610 M/SEC
8 AUTOMATIC RESIDUAL STATICS	
MAX CORRELATION LAG	+-30 MS
WINDOW	300-1700 MS
9 VELOCITY ANALYSIS	
10 NMO	
11 AUTOMATIC RESIDUAL STATICS	
MAX CORRELATION LAG	+-20 MS
WINDOW	150-1200 MS
12 COMMON OFFSET STACK	
13 RESIDUAL NMO	
14 MUTE	
15 STACK	1200 PERCENT
16 WAVE EQUATION MIGRATION	
17 BANDPASS FILTER	10/20 - 60/70 HZ
18 EQUALIZATION	
WINDOW	400-2500 MS
19 FILM DISPLAY	16 TRACES/IN 7.5 INCHES/SEC

POLARITY (X) NORMAL ( ) REVERSE

PROCESSING PARAMETERS SELECTED BY
EMPRESS EXPLORATION CONSULTANTS

LOGITECH
CALGARY T1G 3R5
Tel (613) 731-9571
Telex 053-3502 Cable: TERRA
PROJ. NO. 9229-N10-10E
LINE NO. NB-17
PART NO. 1 OF 2
R.R. 10X

terra surveys ltd
2000 Walkley Rd. Ottawa, Ont.
Canada K1G 3P5
Tel. (613) 731-9571
Telex: 053-3502 Cable: TERRA

PROJ. NO. 9 2 2 9 - N 1 0 - 1 0 E

LINE NO. N B - 1 7

PART NO. 2 OF 2
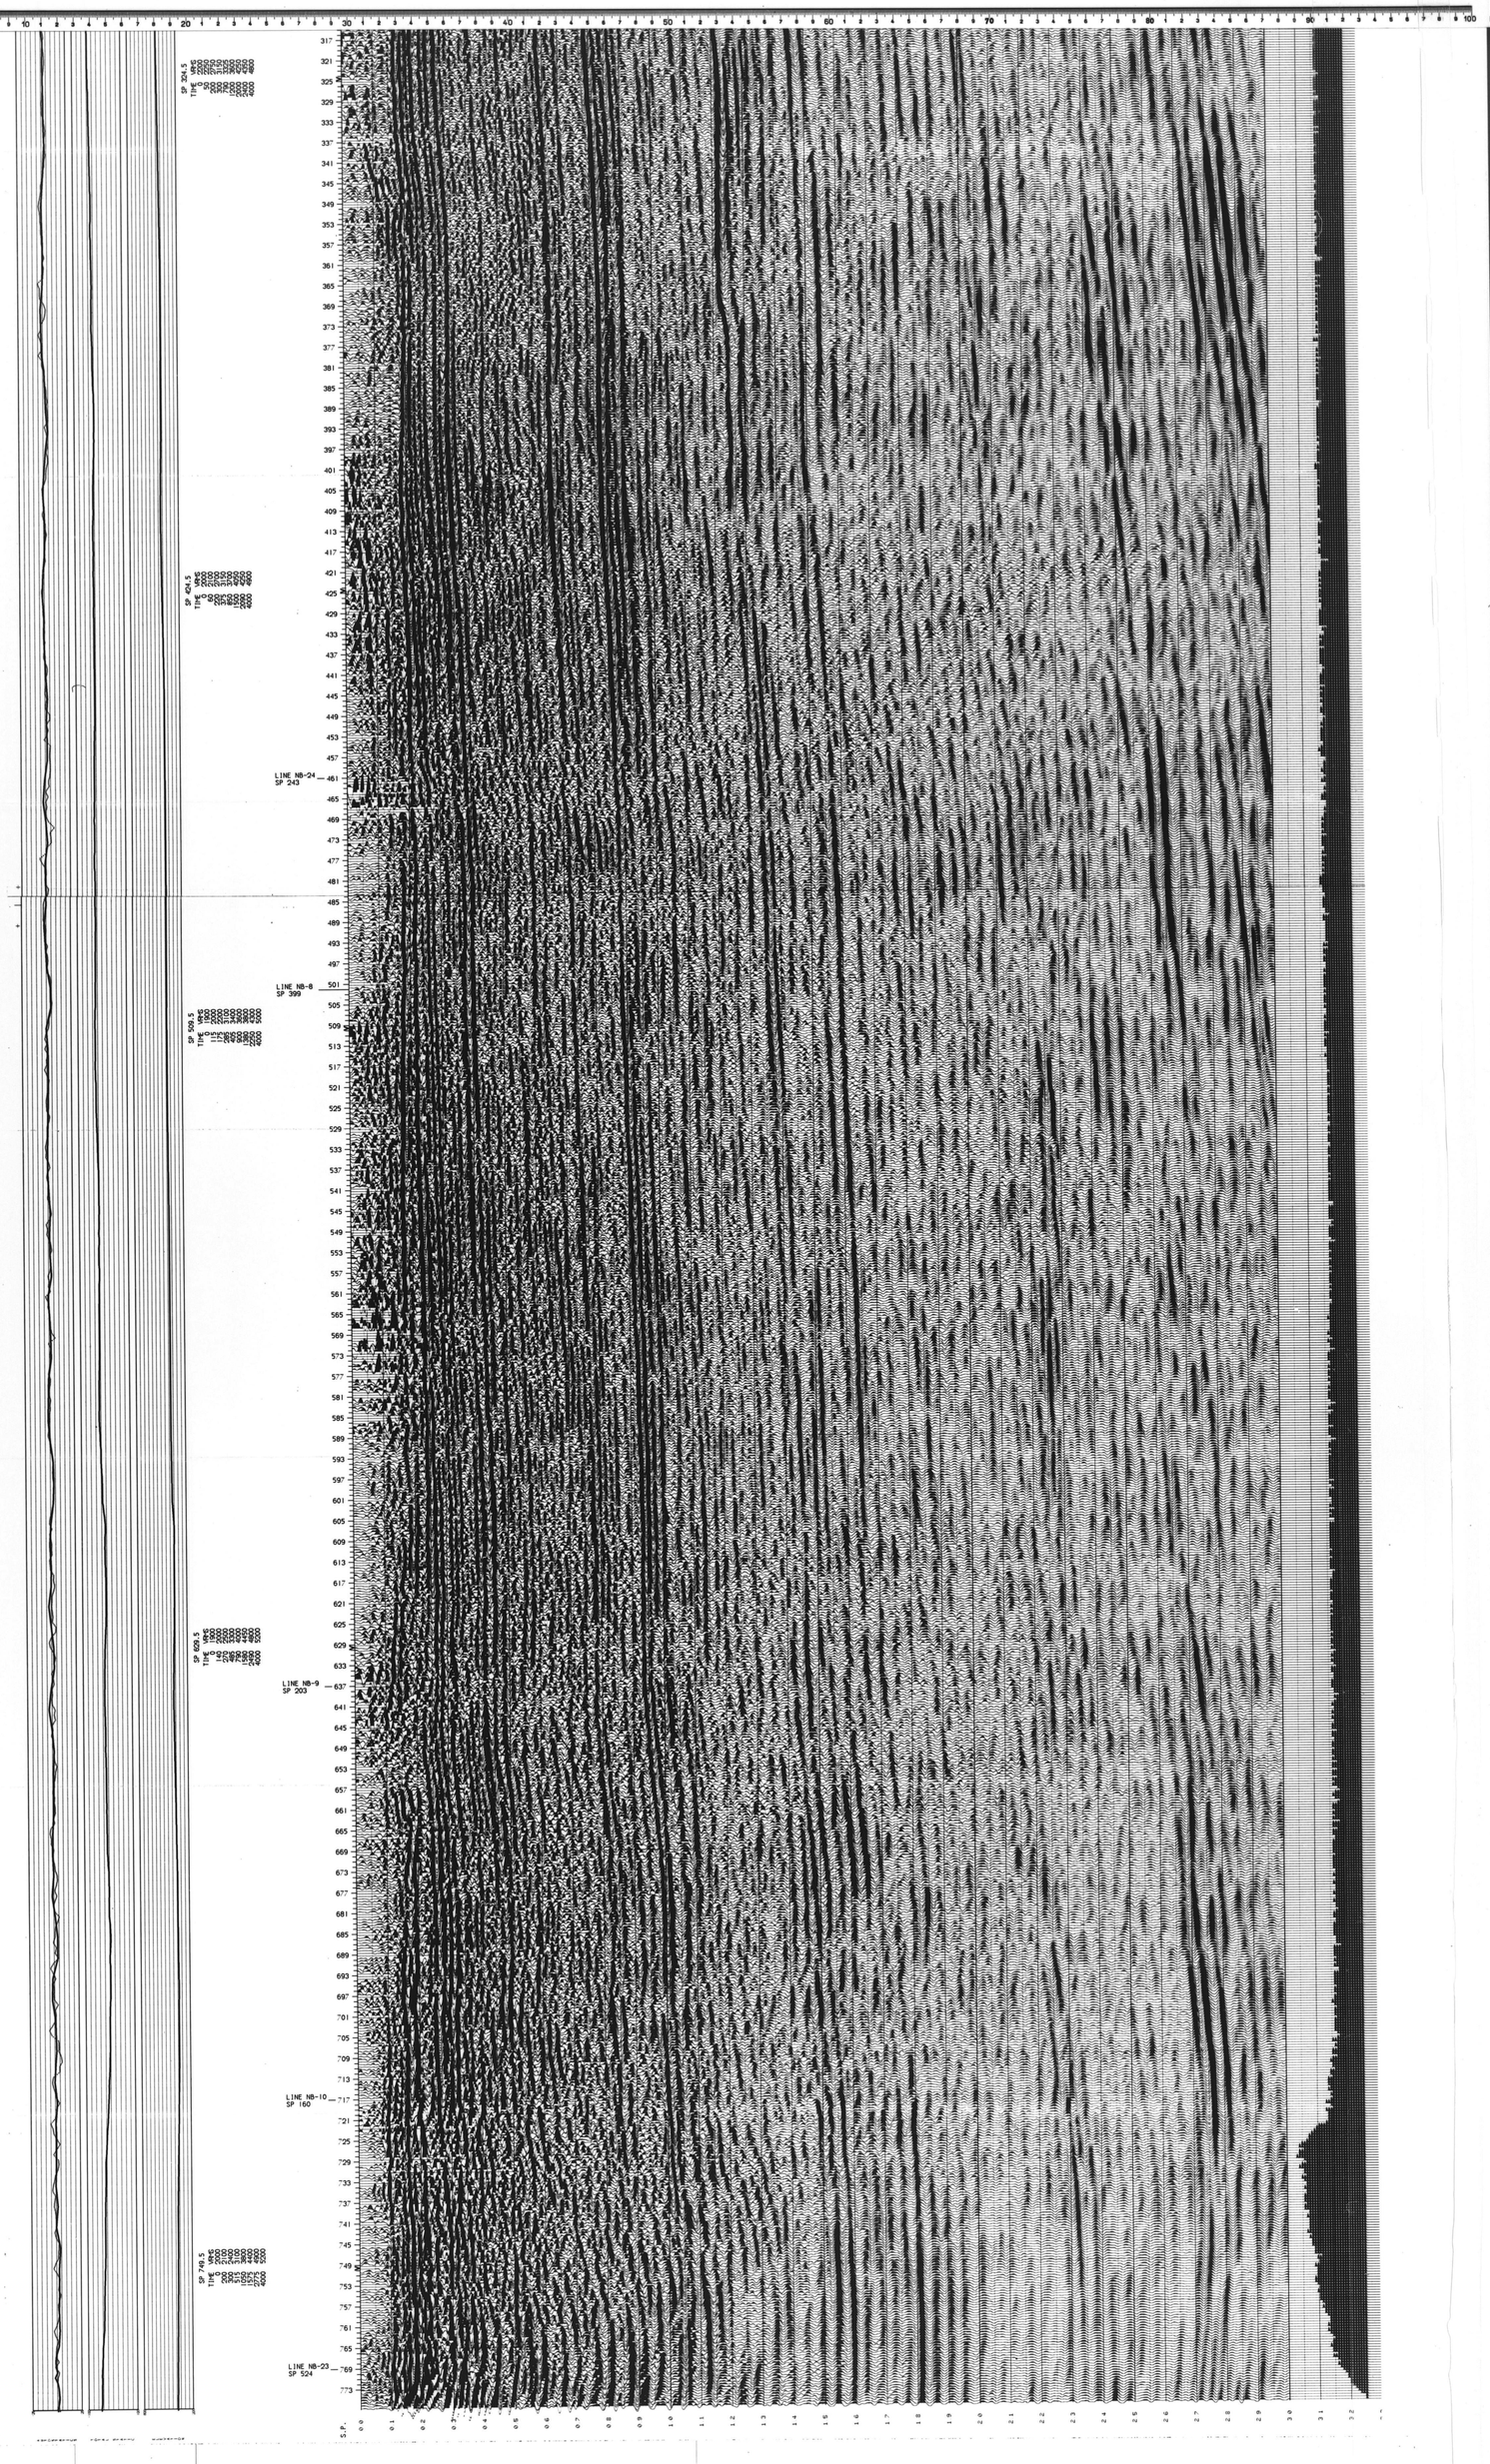
R.R. 10X