

OTTAWA COPY

211-235-51

MICROFILMED
SUR MICROFILM

Schlumberger

SCHLUMBERGER OF CANADA
CALGARY LOG INTERPRETATION CENTER
24TH FLOOR, MONROE PLACE
801 6th Avenue SW
Calgary, Alberta T2P 5W2
(403) 231-5600

VERTICAL SEISMIC PROFILE

COMPOSITE LOGS
OFFSET 50 METRES - NE

Company: PETRO CANADA INC.
Well Name: PCI SWEDE E-02
Field: CAMERON HILLS
Location: Latitude: 60 11' 26.029" Longitude: 117 31' 24.7"
Province: NORTHWEST TERRITORIES, CANADA

ELEVATIONS DATA
Permanent Station: OL Elevations Measured In: METRES
Station Reference Datum (SRS): 750.0 METRES A.S.L. SRS Elevation: 750.00
Logs Measured From: KB Casing Measured From: KB Water Mud Line Depth:
Kelly Reading (KB): 810.10 Dth Floor (KF): 809.80 Ground Level (GL): 805.00
Note:

ACQUISITION DATA
Run Number: 1
Date: 11 FEB 1990
Total Depth: 750.0 M
Bit Size: 800 MM
Casing Size: 244.5 MM @ 480.0 M
Tool Type: SCA
Source Type: DYNAMIC
Source Activity: VARIABLE (SEE SHOT REPORT)
Source Offset: VARIABLE (SEE SHOT REPORT)
Source Elevation: VARIABLE (SEE SHOT REPORT)
Engineer: PETERSON
Wireline: STEINWALD
OSU Software: CP-304
Logging Unit: 830
Format: 100% LEVEL
DYNAMIC:

PROCESSING DATA
Processing Job Reference: 9107 Processing Date: FEB 1990
Log Analyst: N. PALSHAK Processing Software Revision: 000001
REPLACEMENT VELOCITY: 3650 M/SEC


VSP, SYNTHETIC SEISMOGRAMS AND LOGS

REVERSE POLARITY


REFERENCE DATUM : 750.0 METRES A.S.L.
ACOUSTIC IMPEDANCE : FROM SONIC ONLY
SYNTHETIC SAMPLING RATE : 1.0 MSEC

POLARITY CONVENTION:

NORMAL POLARITY: AN INCREASE OF ACOUSTIC IMPEDANCE
APPEARS AS A WHITE TROUGH.
THIS IS SEG NORMAL POLARITY.
WHEN A COMPRESSIONAL SOURCE IS USED

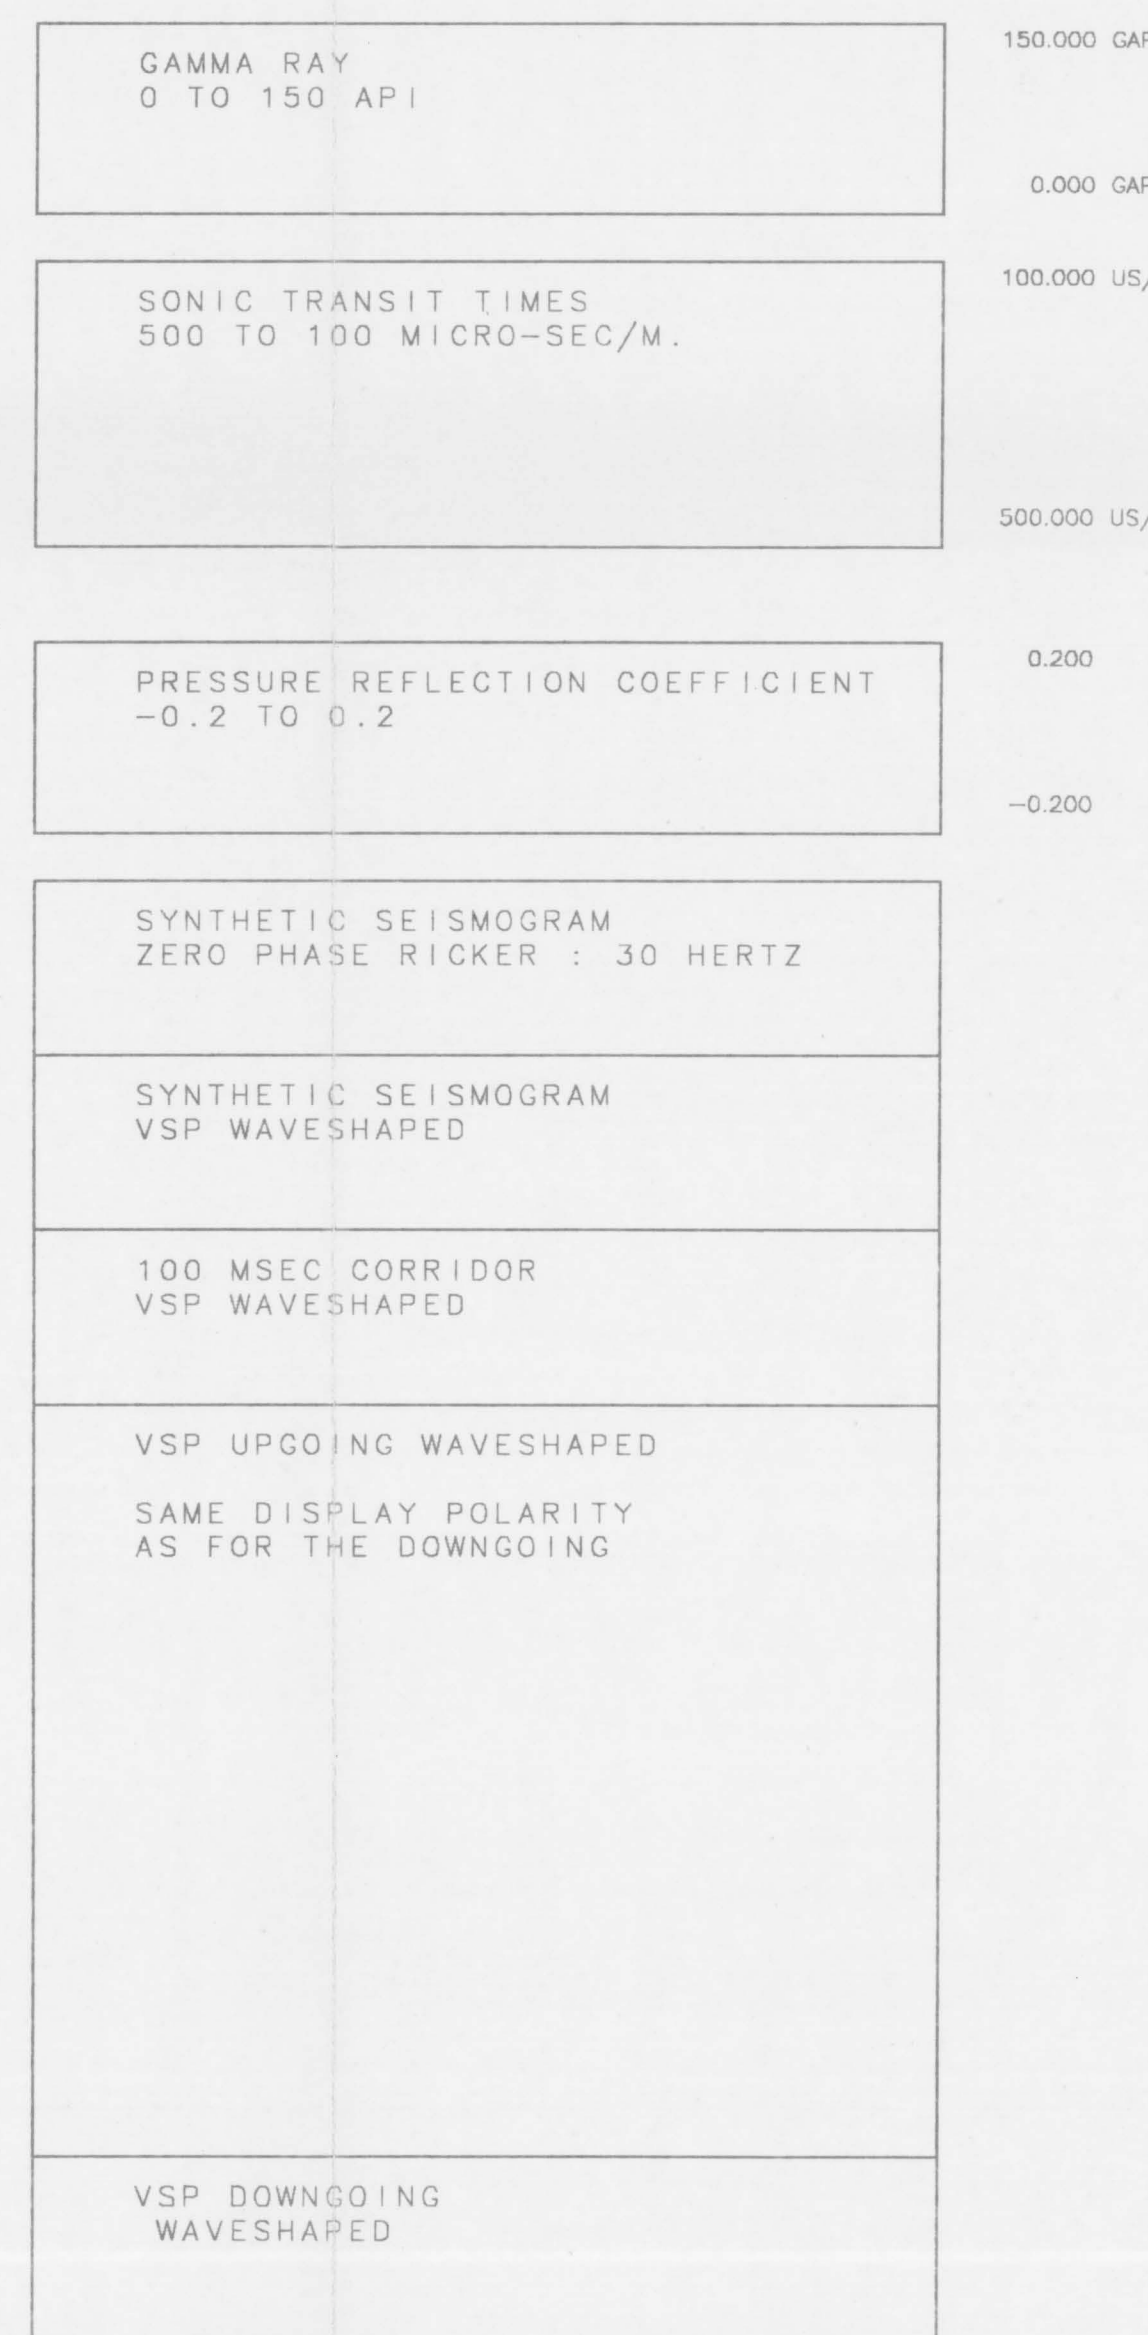

RAW DEPTH
M

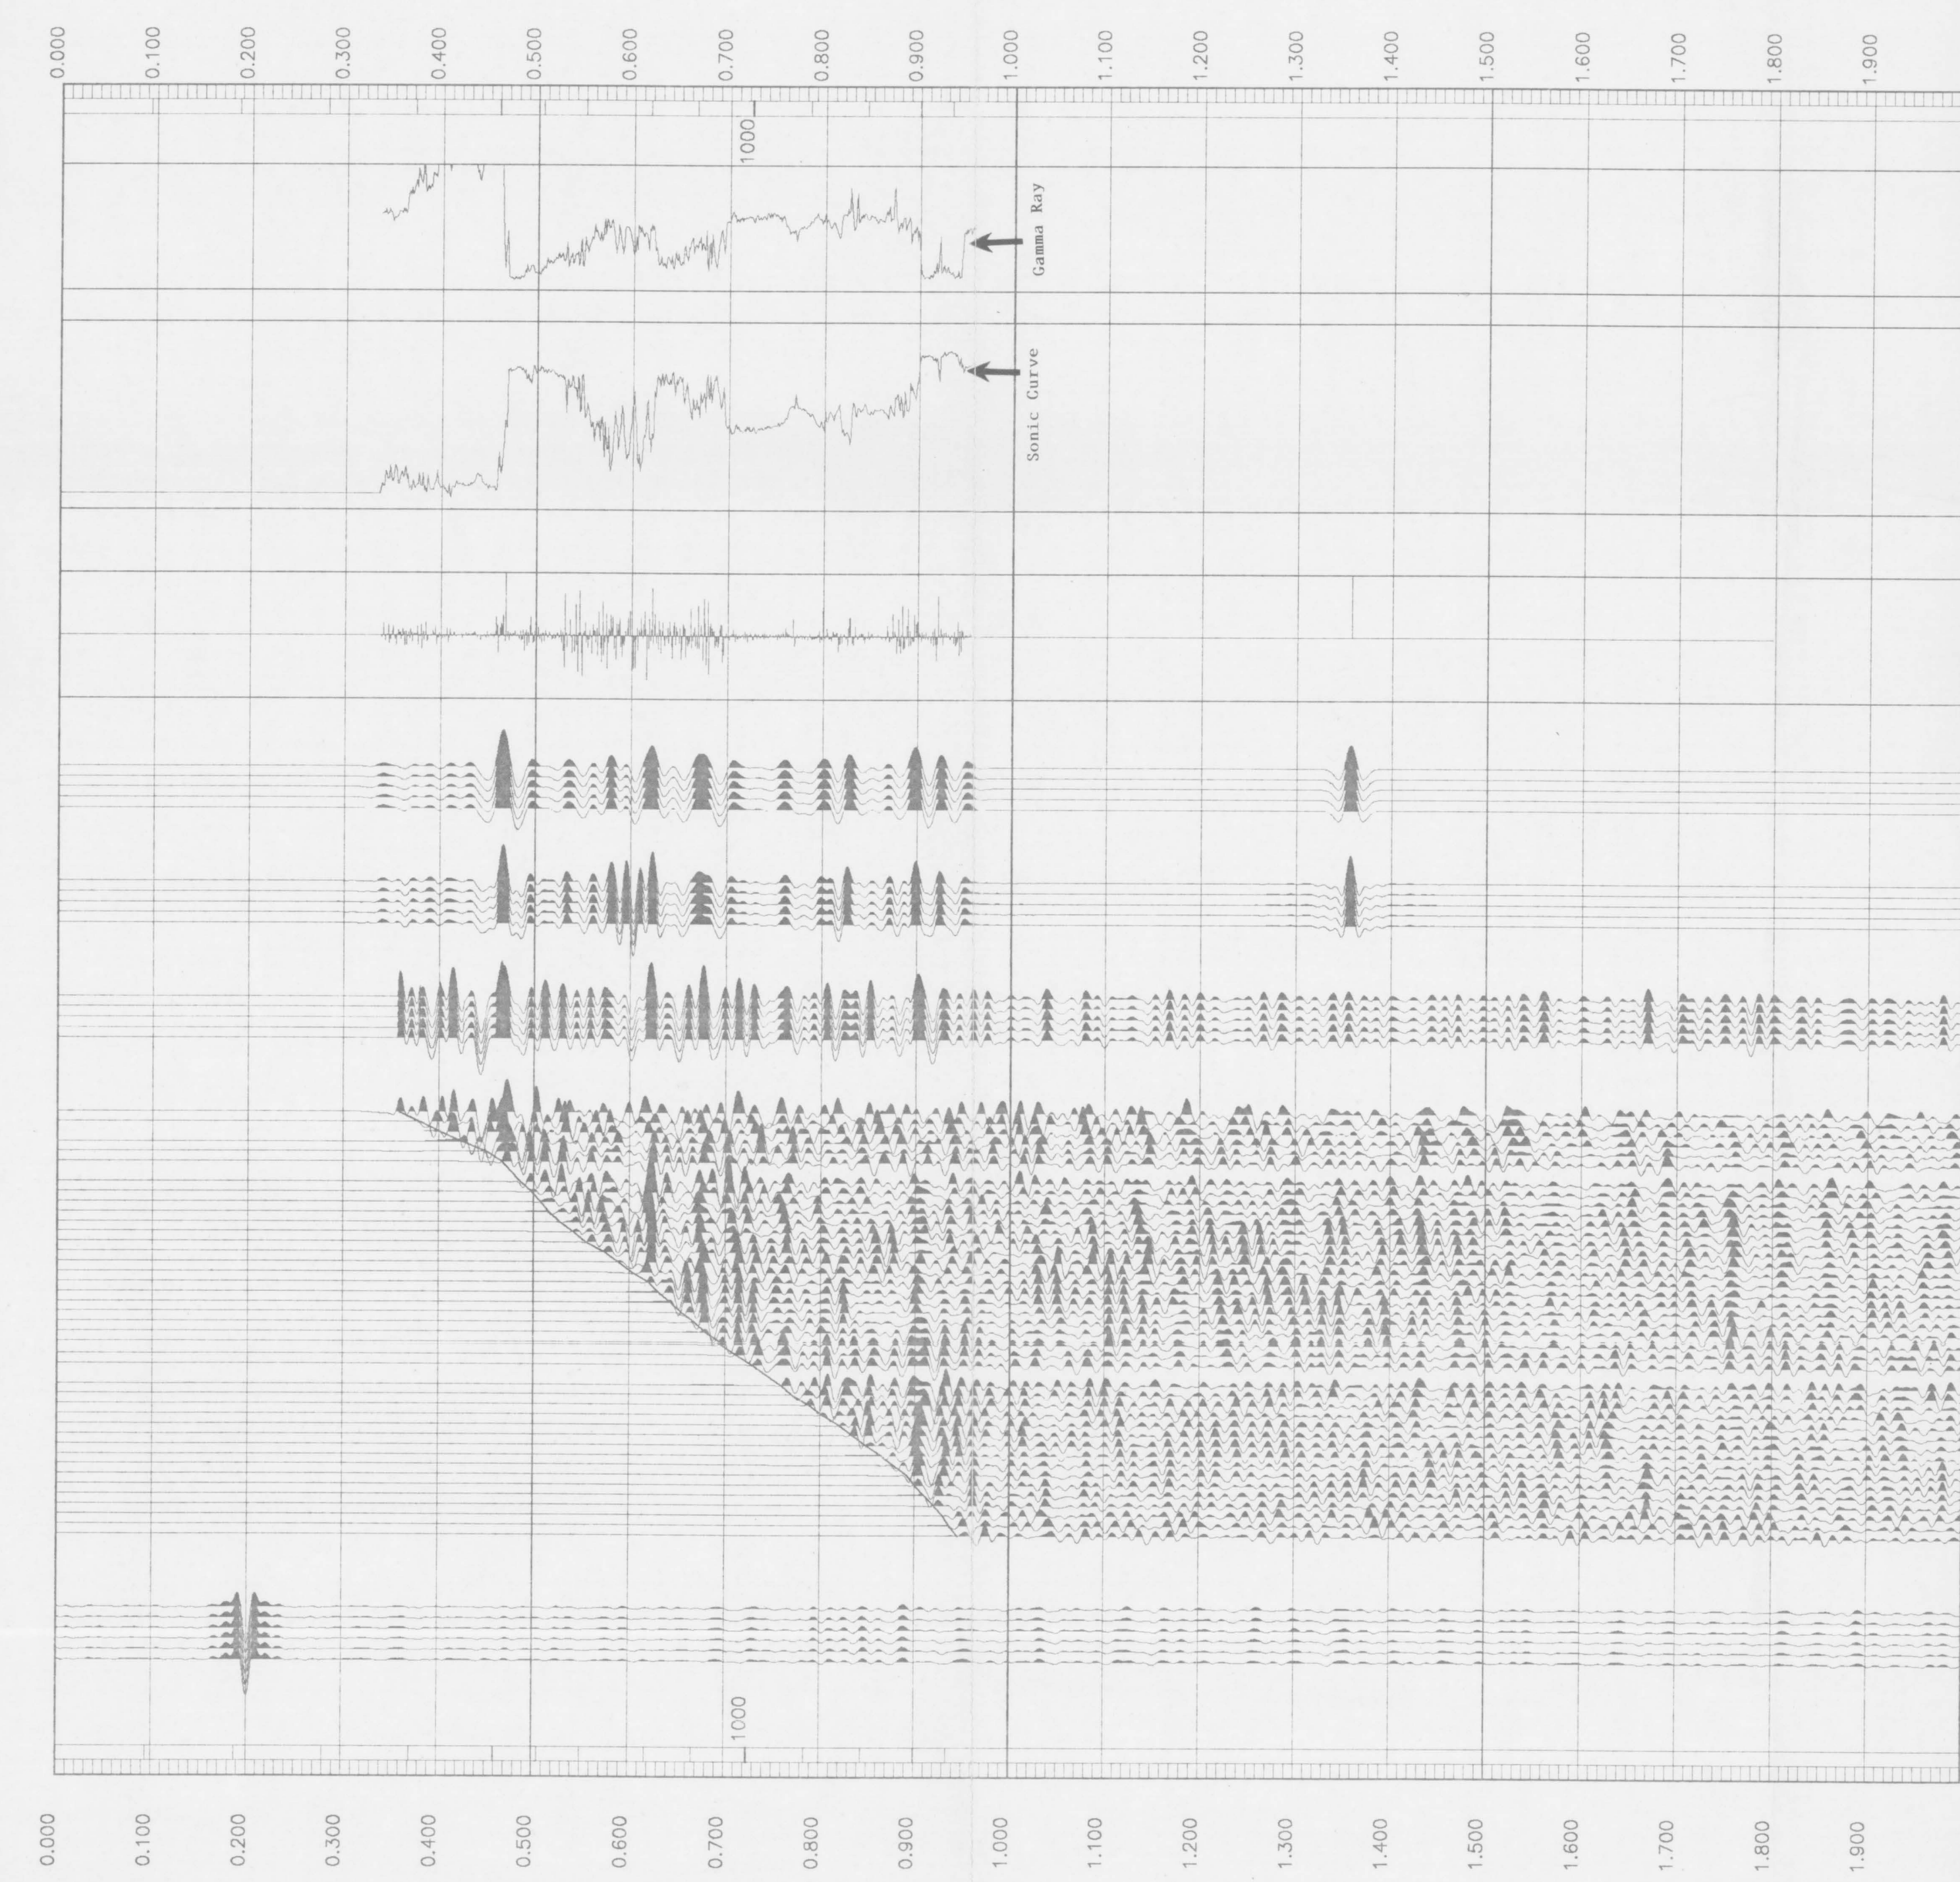


VSP, SYNTHETIC SEISMOGRAMS AND LOGS

NORMAL POLARITY

REFERENCE DATUM : 750.0 METRES A.S.L.
ACOUSTIC IMPEDANCE : FROM SONIC ONLY
SYNTHETIC SAMPLING RATE : 1.0 MSEC

POLARITY CONVENTION:
NORMAL POLARITY: AN INCREASE OF ACOUSTIC IMPEDANCE
APPEARS AS A WHITE TROUGH.
THIS IS SEG NORMAL POLARITY.
WHEN A COMPRESSIONAL SOURCE IS USED

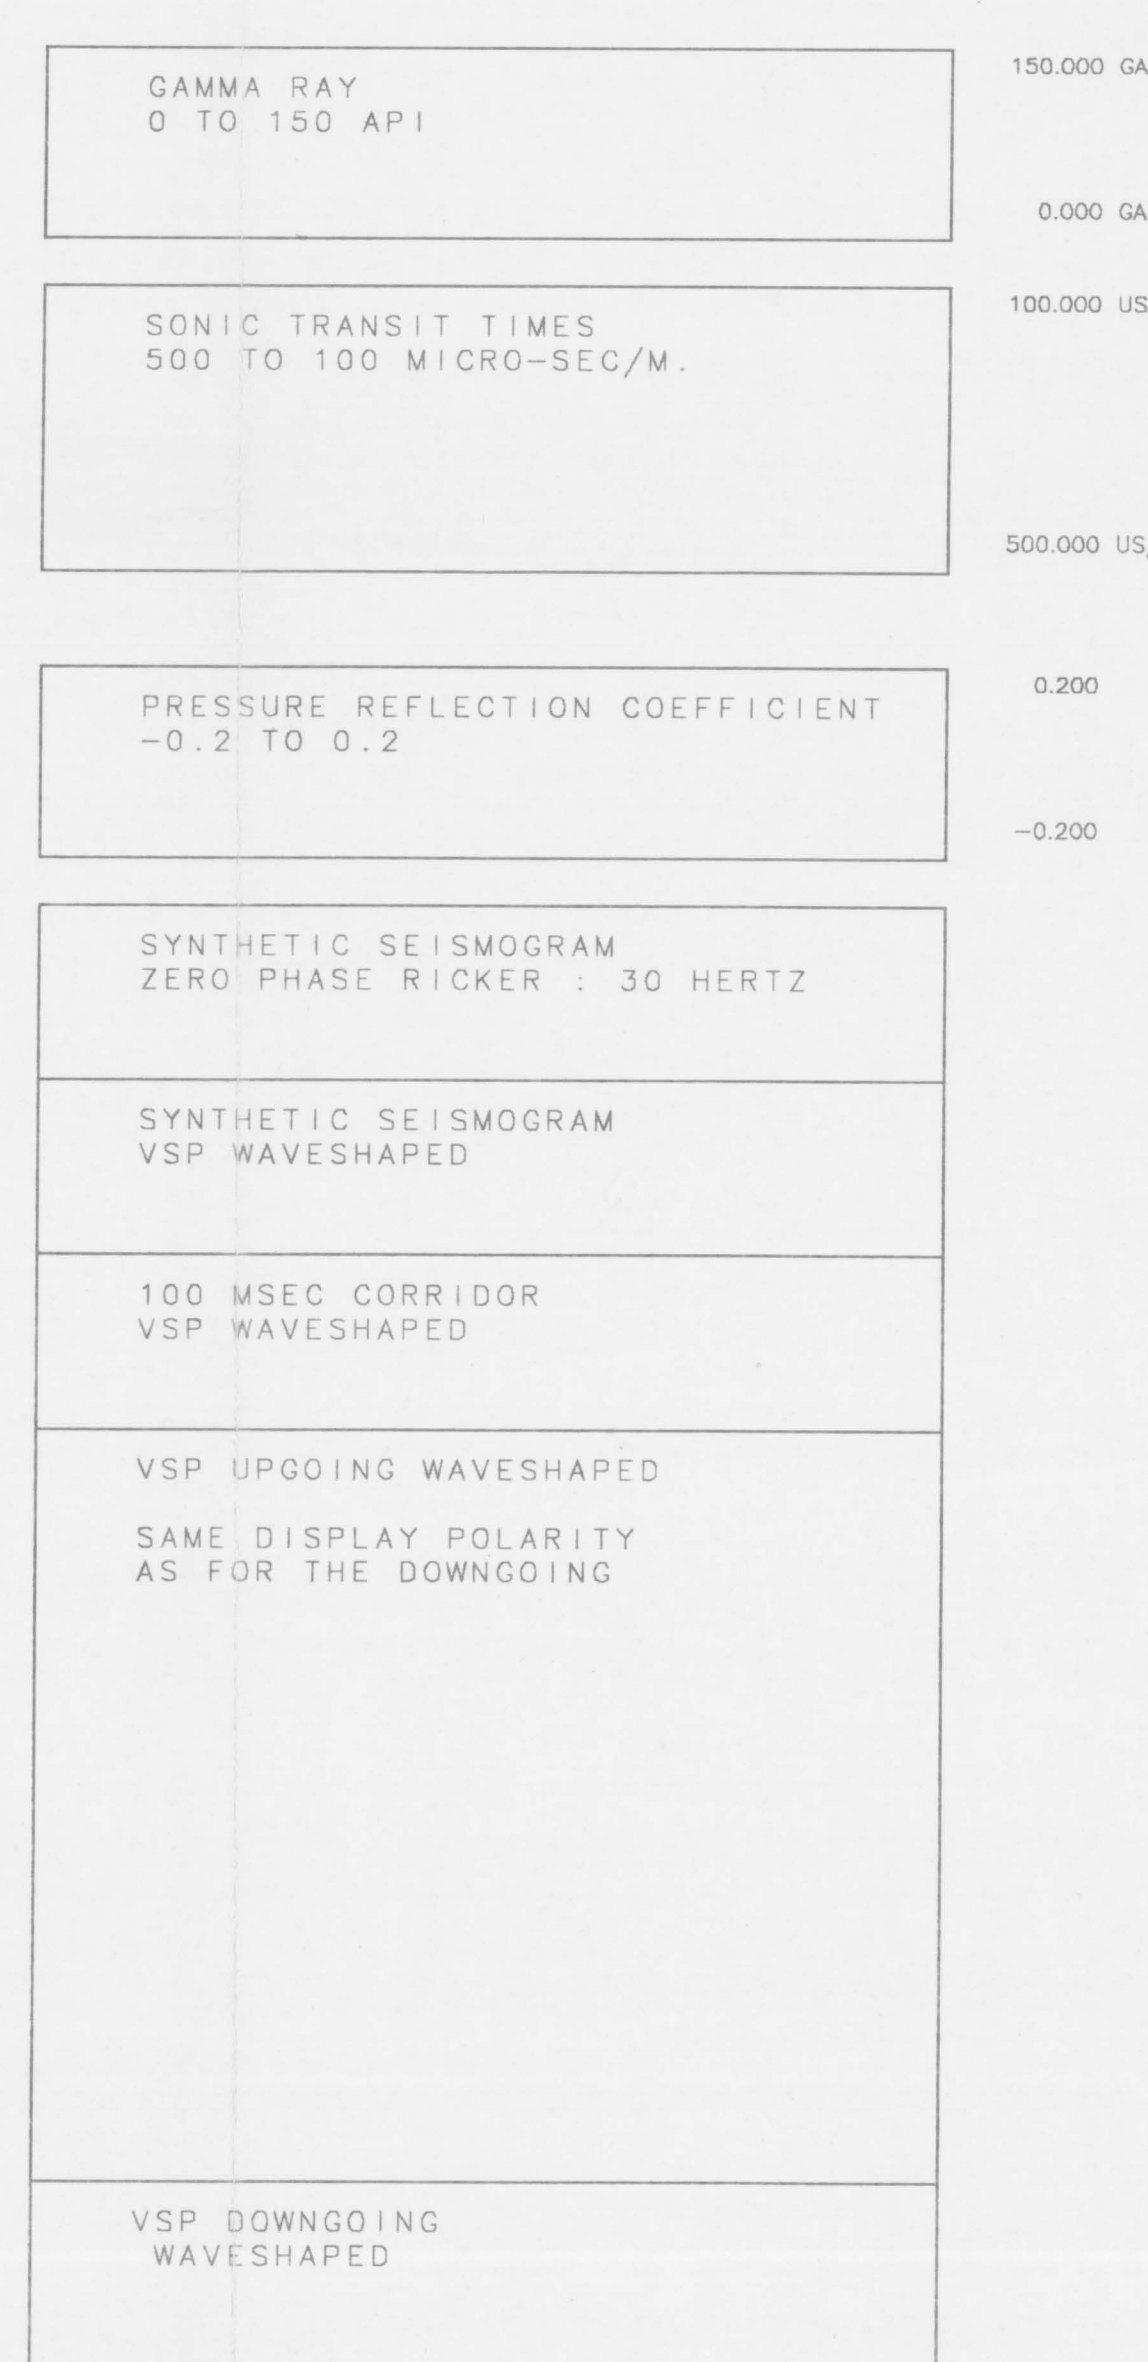

RAW DEPTH
M

