

AGAT LABORATORIES
Core Services Division

9211-P33-6-2

PRELIM DATA
OTTAWA COPY


PRELIMINARY REPORT

PARA et al SWEDE
A-52

Core #1 & #2

Prepared For
PARAMOUNT RESOURCES LTD.

RC3093
02/22/91

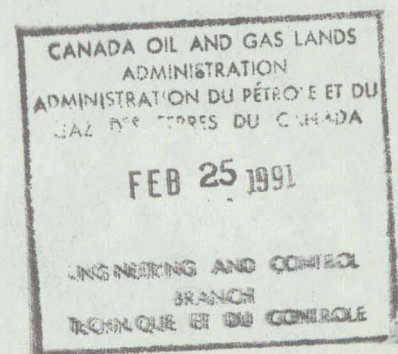

COMPANY: PARAMOUNT RESOURCES LTD.
WELL: PARA et al SWEDE
LOCATION: A-52
FORMATION: SULPHUR POINT
DRILLING FLUID:

AGAT LABORATORIES

Page: 1
W/O No: RC3093
Date: 22/02/91

PRELIMINARY CORE ANALYSIS DATA

Sample	Interval (m)		Rep Thick (m)	Sample Length (m)	-----Gas Permeability-----			Porosity	Density (kg/m3)		Residual Saturation		Remarks
	Top	Base			Kmax (mD)	K90 (mD)	Vertical (mD)		Bulk	Grain	Oil	Water	


CORE NO. 1 1363.00 - 1381.00 (RECEIVED IN LAB = 17.90m)													
SP001P	1366.42	-	-	-	.08	-	-	.015	2710	2780	trc	.171	
SP002P	1371.32	-	-	-	.27	-	-	.075	2610	2830	.244	.455	
SP003P	1372.37	-	-	-	2.33	-	-	.173	2330	2810	.213	.340	
SP004P	1373.58	-	-	-	.08	-	-	.054	2690	2850	.235	.113	
SP005P	1375.27	-	-	-	3.27	-	-	.076	2620	2830	.277	.089	
SP006P	1377.30	-	-	-	<.01	-	-	.040	2710	2820	trc	.137	
SP007P	1378.59	-	-	-	59.1	-	-	.178	2330	2840	.232	.177	
SP008P	1379.25	-	-	-	196.	-	-	.200	2280	2850	.375	.415	
SP009P	1380.79	-	-	-	91.1	-	-	.141	2440	2840	.339	.164	
CORE NO. 2 1381.00 - 1390.60 (RECEIVED IN LAB = 9.60m)													
SP010P	1381.63	-	-	-	.05	-	-	.063	2640	2810	.102	.563	
SP011P	1382.77	-	-	-	.04	-	-	.032	2740	2840	trc	.150	
SP012P	1384.89	-	-	-	<.01	-	-	.048	2720	2860	.310	.104	

COMPANY: PARAMOUNT RESOURCES LTD.
WELL: PARA et al SWEDE
LOCATION: A-52
FIELD:
FORMATION(S): SULPHUR POINT
W/O: RC3093



RECOVERY: 27.50 m
CORED INTERVAL: 1363.00 - 1390.60
DRLG. FLD.:
ELEVATION: KB:
GRD:

CORELOG

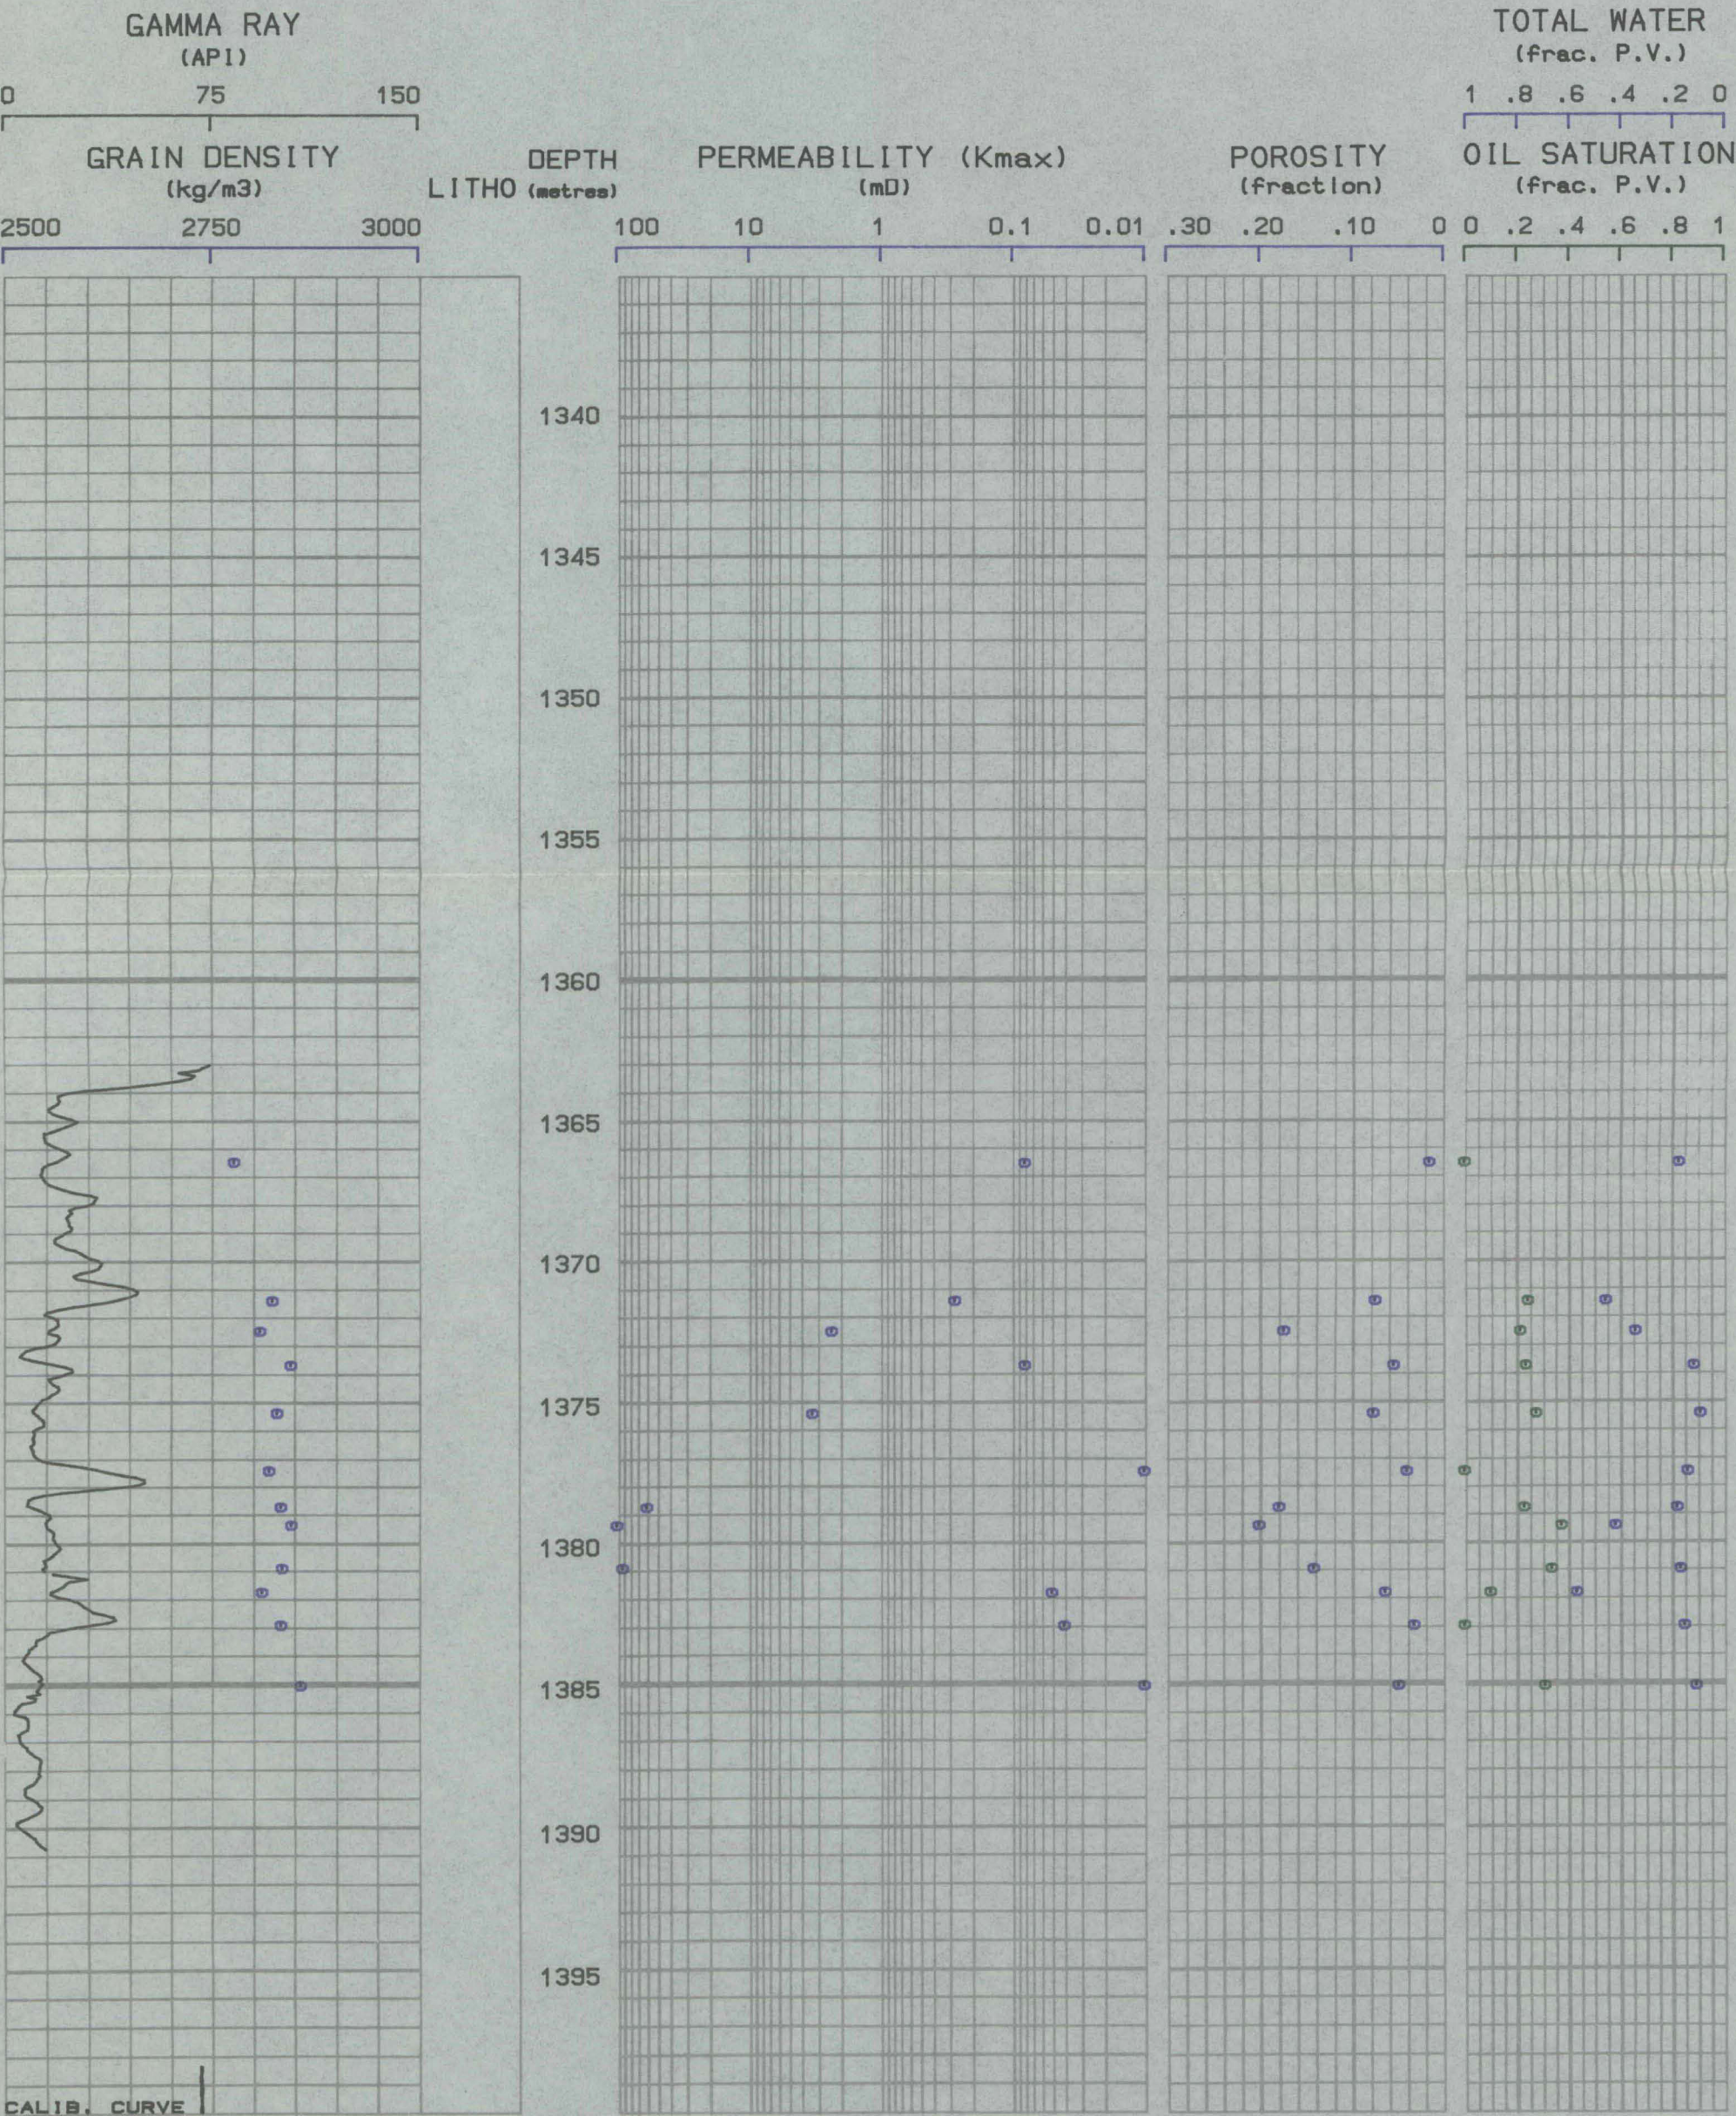

AGAT LABORATORIES
Core Services Division


9211-P33-6-2

PRELIM DATA
CALGARY CO
PRELIMINARY REPORT

PARA et al SWEDE
A-52

Prepared For
PARAMOUNT RESOURCES LTD.

RC3093
02/22/91

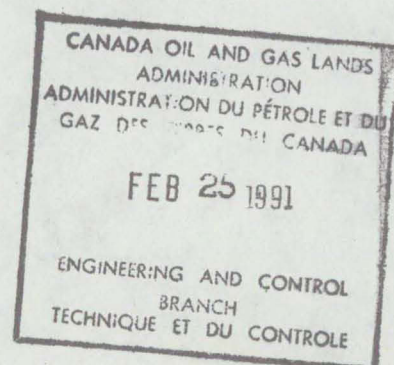

COMPANY: PARAMOUNT RESOURCES LTD.
WELL: PARA et al SWEDE
LOCATION: A-52
FORMATION: SULPHUR POINT
DRILLING FLUID:

AGAT LABORATORIES

Page: 1
W/O No: RC3093
Date: 22/02/91

PRELIMINARY CORE ANALYSIS DATA

Sample	Interval (m)		Rep Thick (m)	Sample Length (m)	-----Gas Permeability-----			Porosity	Density (kg/m3)		Residual Saturation		Remarks
	Top	Base			Kmax (mD)	K90 (mD)	Vertical (mD)		Bulk	Grain	Oil	Water	

CORE NO. 1					1363.00 - 1381.00			(RECEIVED IN LAB =		17.90m)			
SP001P	1366.42	-	-	-	.08	-	-	.015	2710	2780	trc	.171	
SP002P	1371.32	-	-	-	.27	-	-	.075	2610	2830	.244	.455	
SP003P	1372.37	-	-	-	2.33	-	-	.173	2330	2810	.213	.340	
SP004P	1373.58	-	-	-	.08	-	-	.054	2690	2850	.235	.113	
SP005P	1375.27	-	-	-	3.27	-	-	.076	2620	2830	.277	.089	
SP006P	1377.30	-	-	-	<.01	-	-	.040	2710	2820	trc	.137	
SP007P	1378.59	-	-	-	59.1	-	-	.178	2330	2840	.232	.177	
SP008P	1379.25	-	-	-	196.	-	-	.200	2280	2850	.375	.415	
SP009P	1380.79	-	-	-	91.1	-	-	.141	2440	2840	.339	.164	
CORE NO. 2					1381.00 - 1390.60			(RECEIVED IN LAB =		9.60m)			
SP010P	1381.63	-	-	-	.05	-	-	.063	2640	2810	.102	.563	
SP011P	1382.77	-	-	-	.04	-	-	.032	2740	2840	trc	.150	
SP012P	1384.89	-	-	-	<.01	-	-	.048	2720	2860	.310	.104	


COMPANY: PARAMOUNT RESOURCES LTD.
WELL: PARA et al SWEDE
LOCATION: A-52
FIELD:
FORMATION(S): SULPHUR POINT
W/O: RC3093



PRELIM DATA

CORELOG

RECOVERY: 27.50 m
CORED INTERVAL: 1363.00 - 1390.60
DRLG. FLD.:
ELEVATION: KB:
GRD:

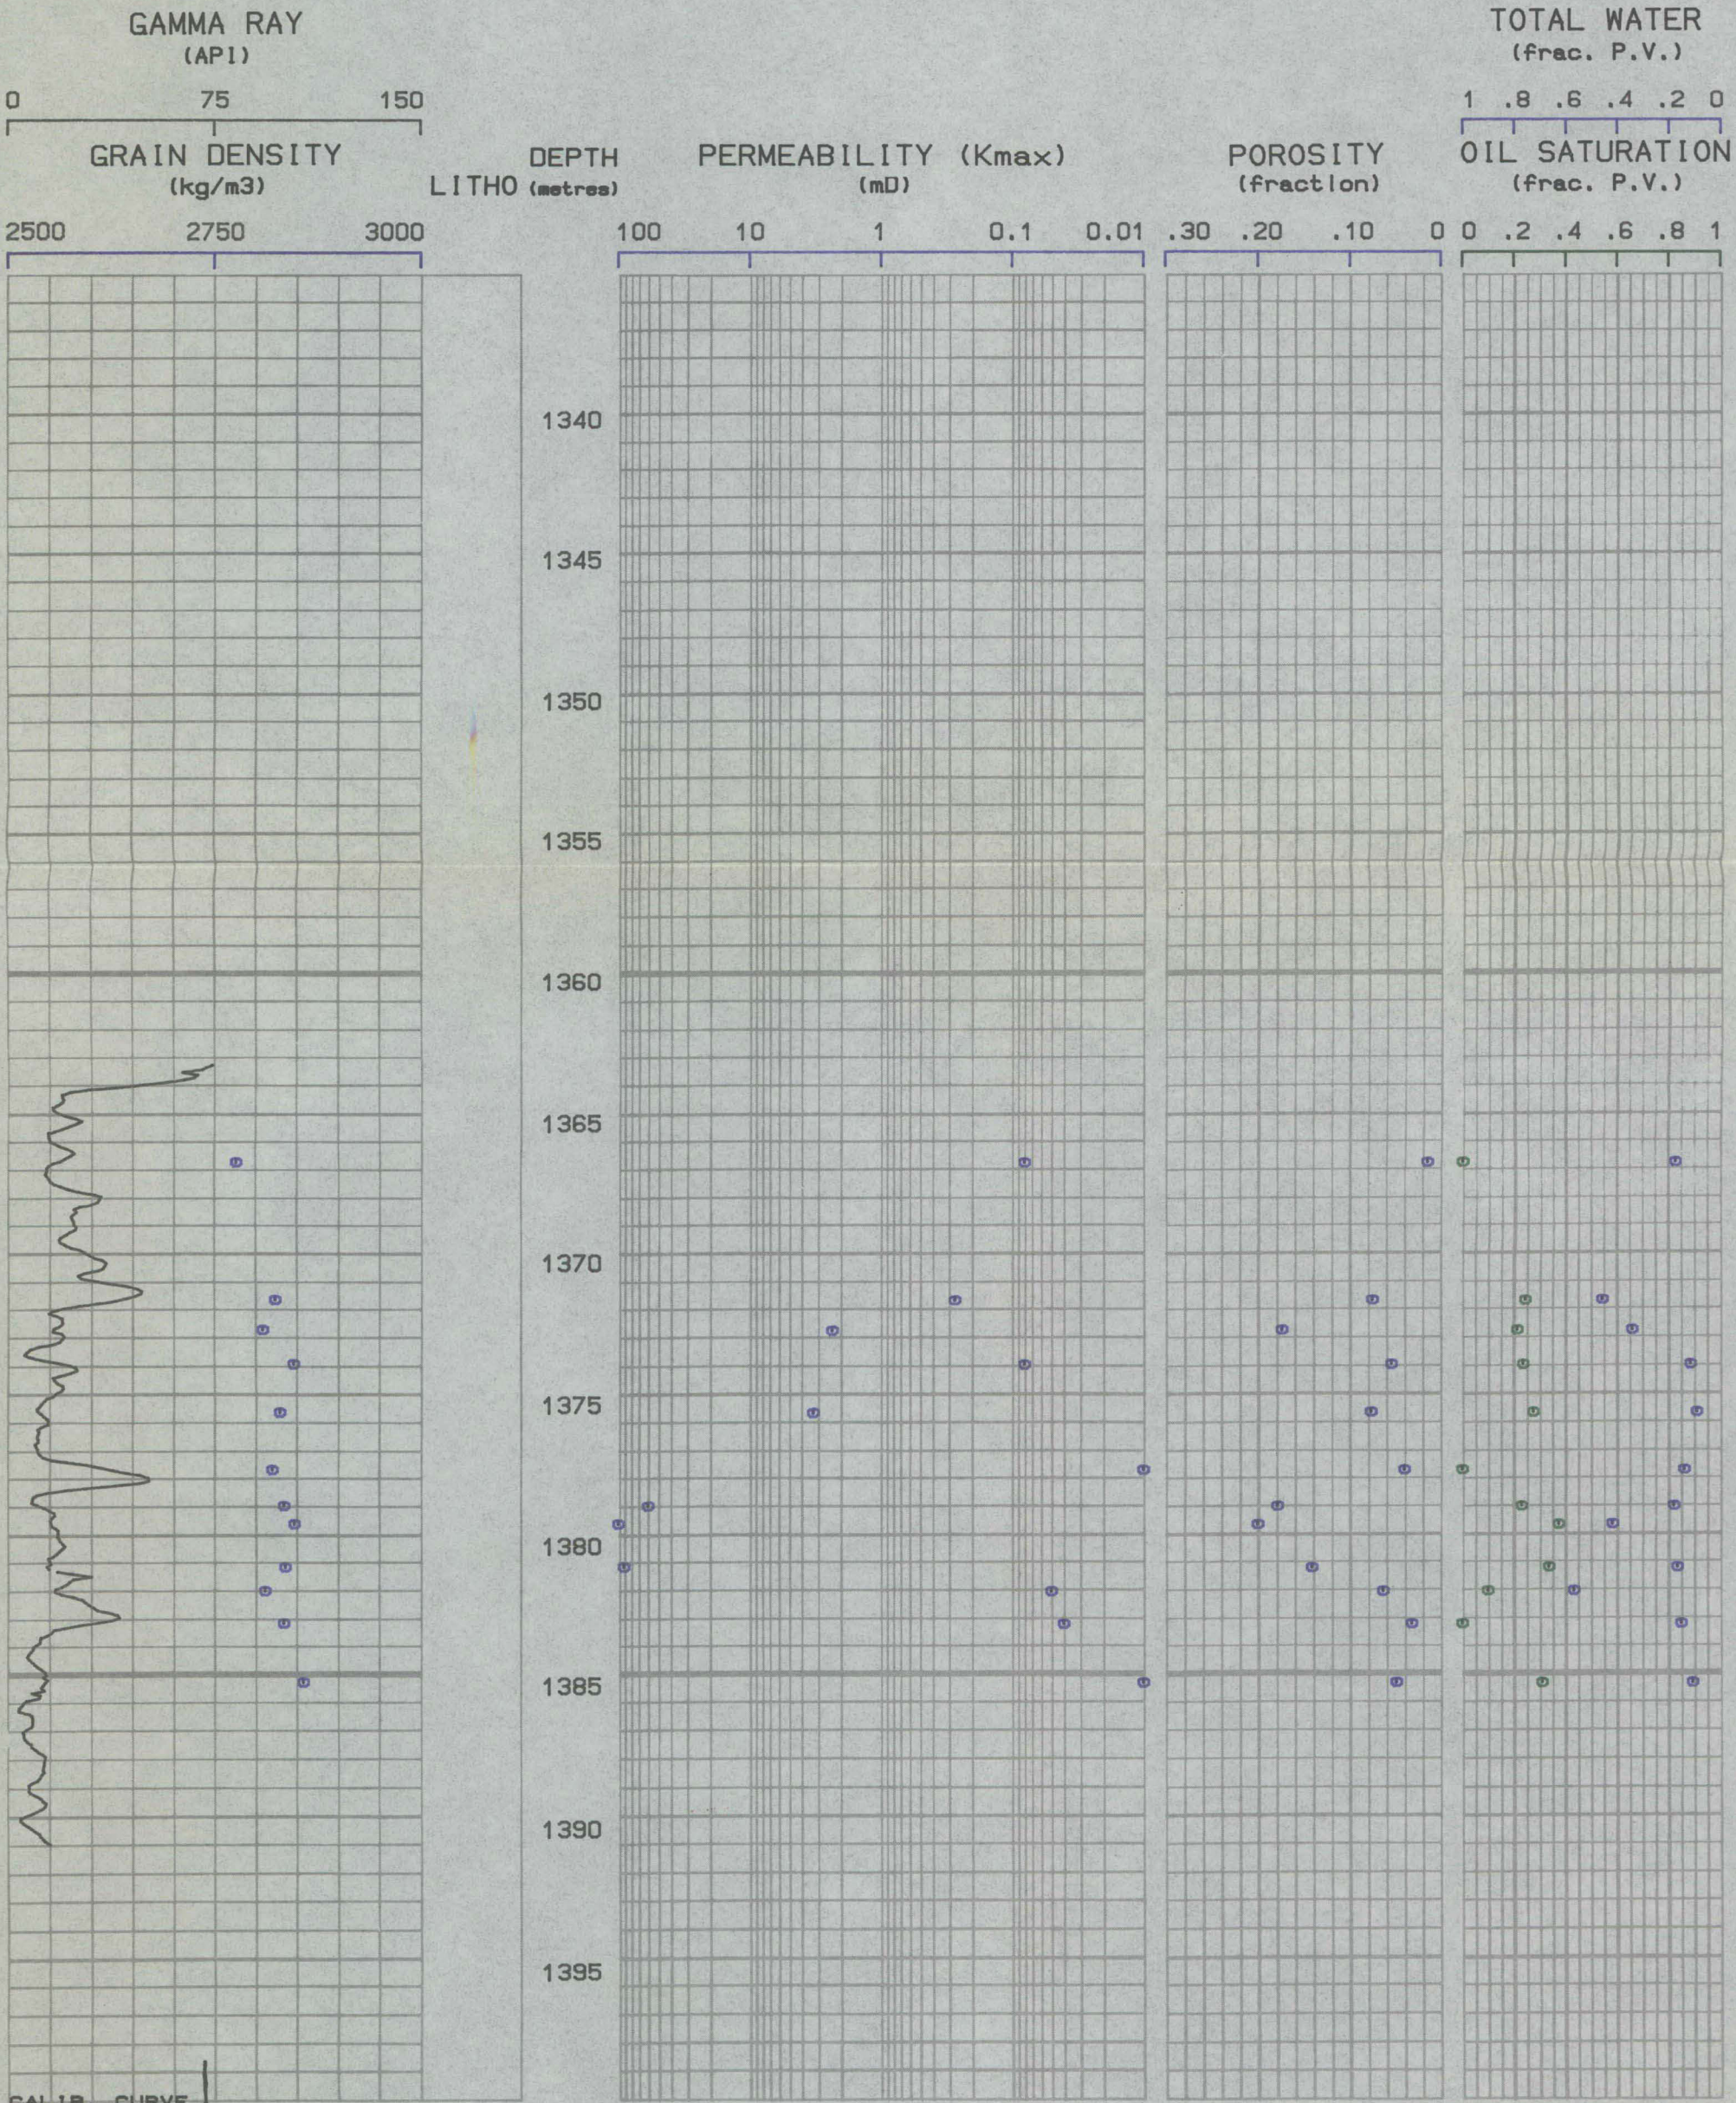

CALIB. CURVE