



Baker Oil Tools

Formation: Belloy
Interval - from: 1,323.00 to: 1,343.00 meters

Test Date: 1999-12-08
Test Type : Inflate Straddle


Recorder# K3 at 1,325.00 meters

Blow Description:

Misrun

Remarks:

Misrun - unable to maintain a stable packer seat.
Packers kept skidding in the hole when weight was applied.

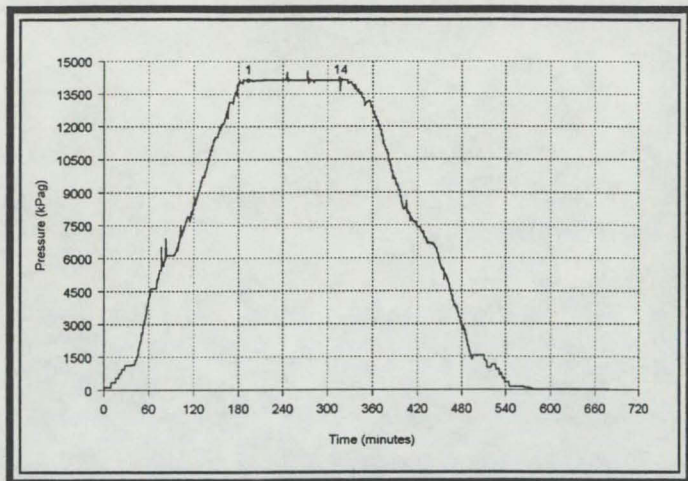

Max Btm Hole Temperature @ FSI: 45.8 C


		Pressure (kPag)	Time (min)	Extrapolated Pressure (kPag)
1	Initial Hydrostatic	14100		
14	Final Hydrostatic	14089		

Liquid Recovery 0.00 meters

Recovery	Description
0.00 m	No fluid recovery
0.00 m	

PARAMOUNT ET AL FORT LIARD I-46
00/ 60.050 / 123.220 /0
DST #: 2
Recorder: K3


Pressure (kPag) at Critical Points:
1: 14100
14: 14089

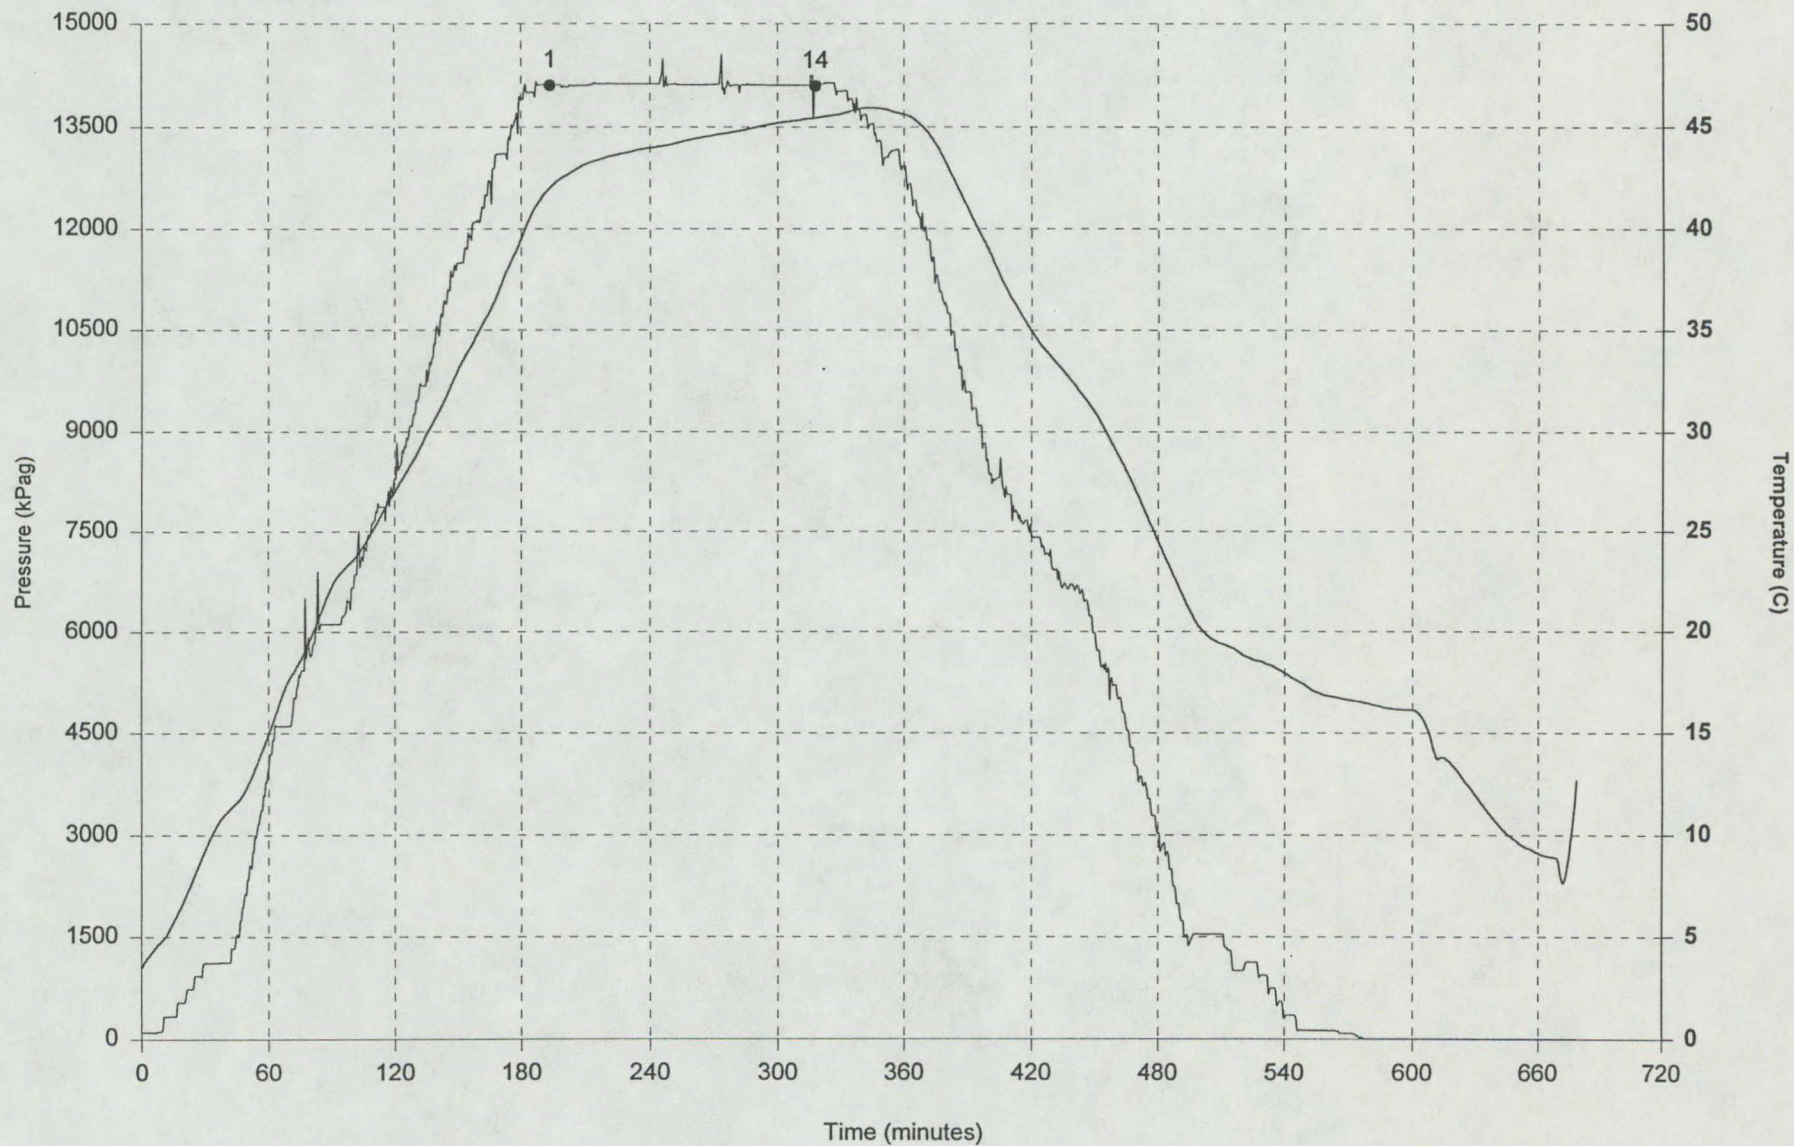

PARAMOUNT ET AL FORT LIARD I-46
00/ 60.050 / 123.220 / 0
DST #: 2
Recorder: N37


Pressure (kPag) at Critical Points:
1: 13955
14: 13968

Above Interval

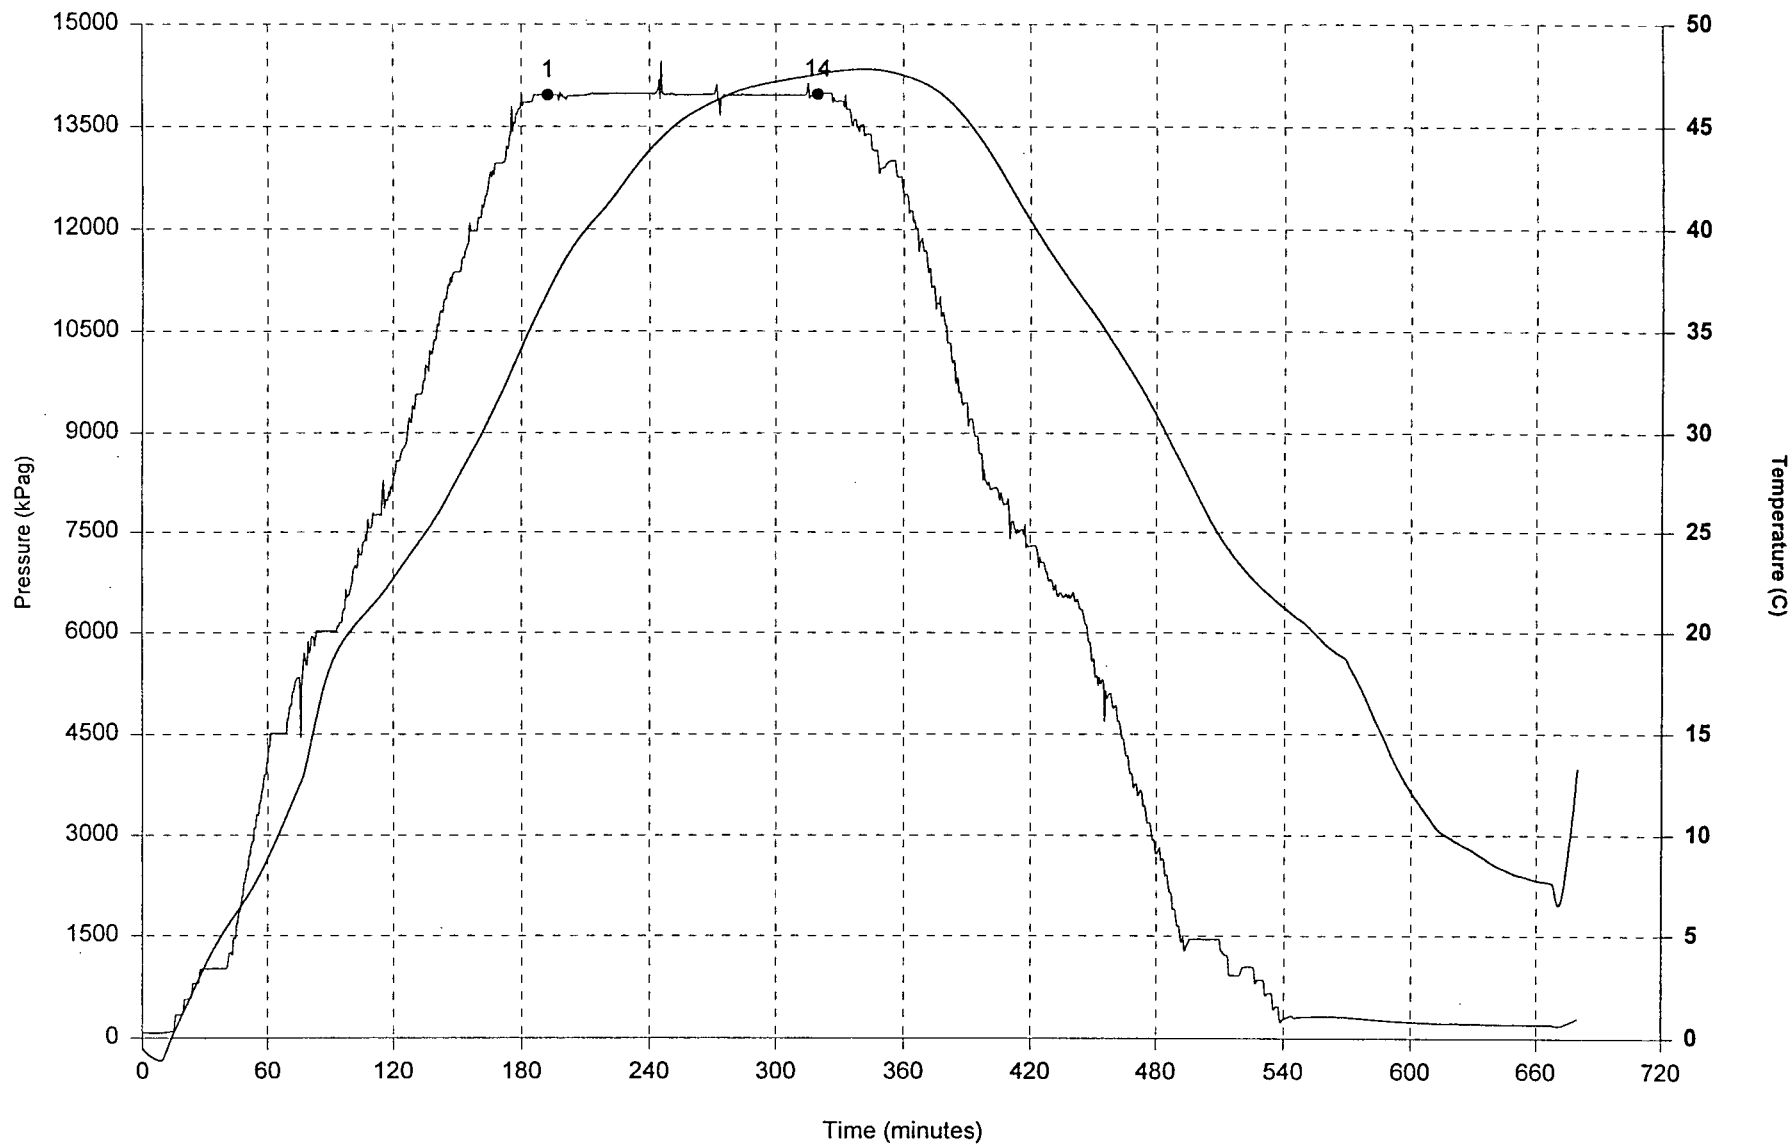

PARAMOUNT ET AL FORT LIARD I-46
00/ 60.050 / 123.220 /0
DST #: 2
Recorder: N63

Recovery Recorder

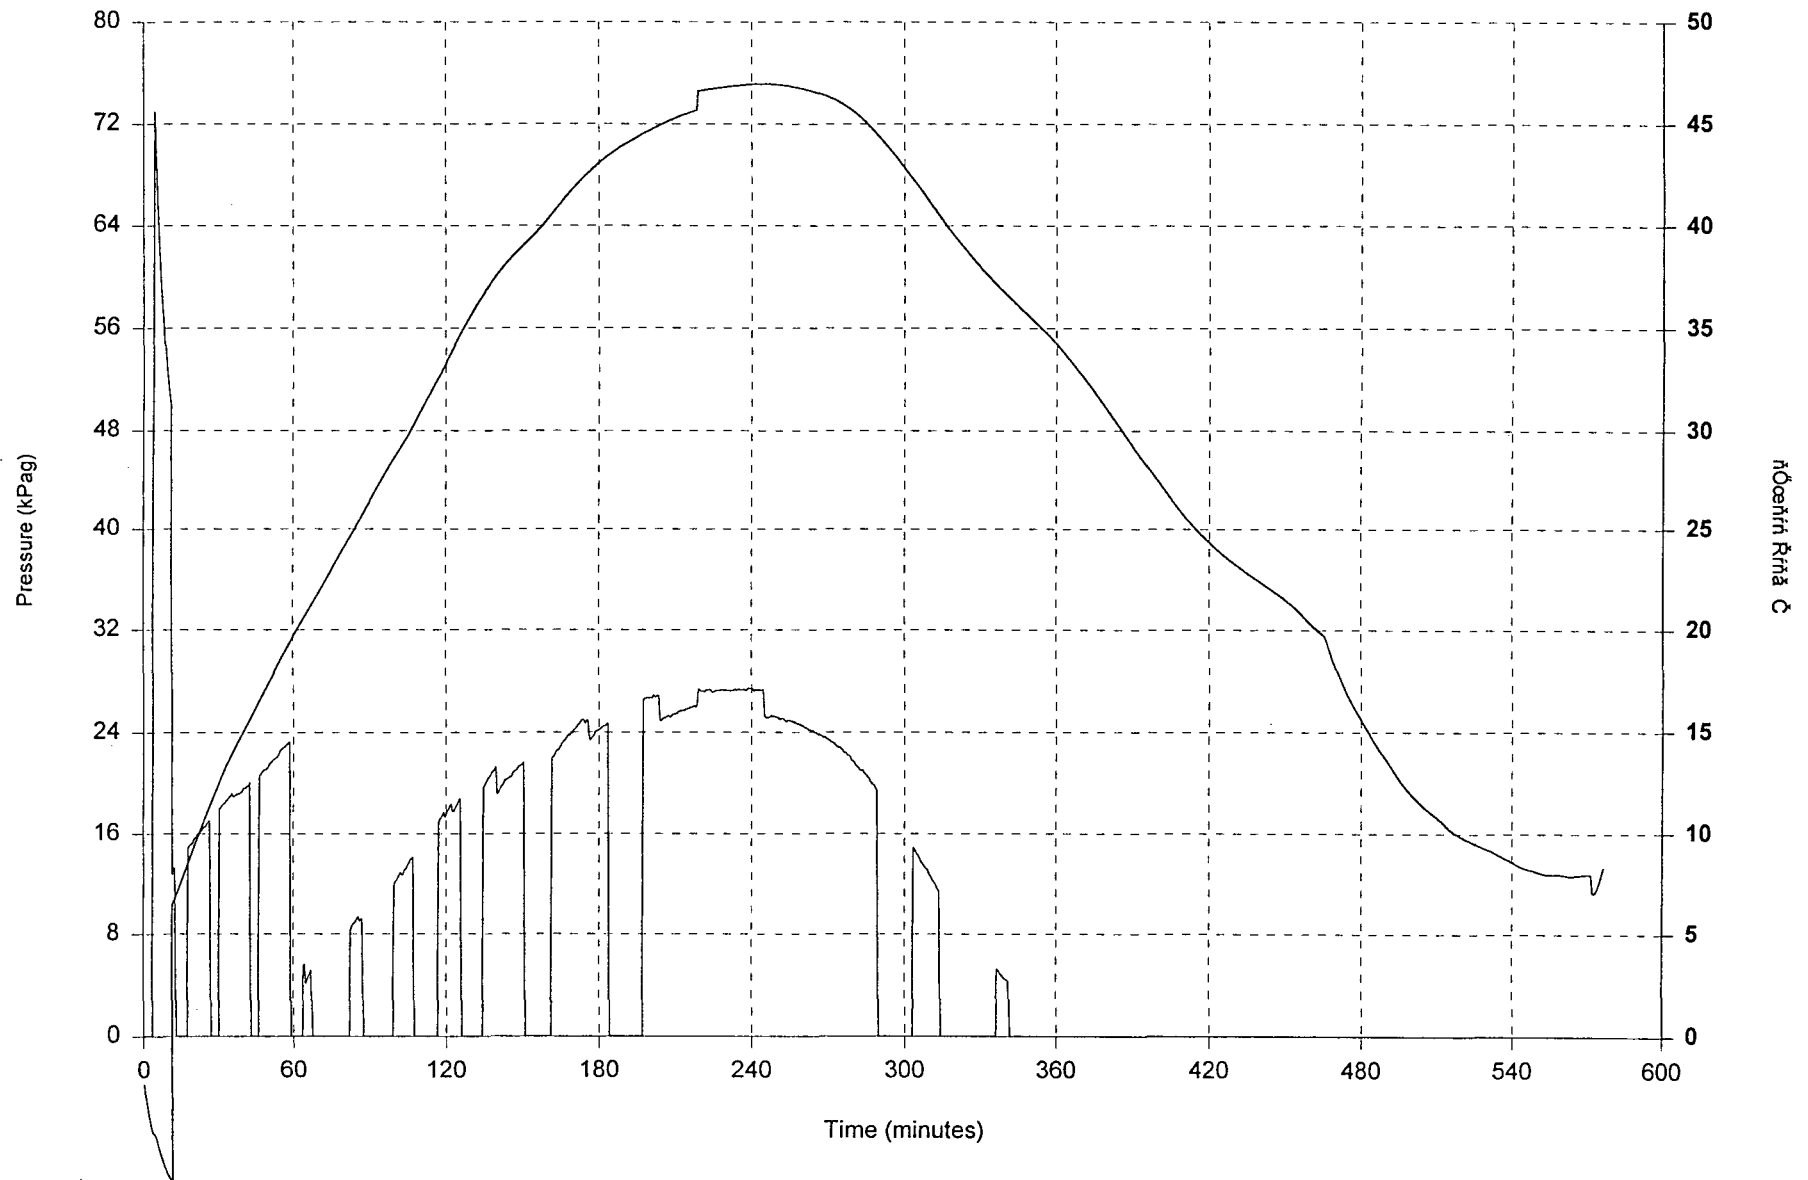

PARAMOUNT ET AL FORT LIARD I-46
00/ 60.050 / 123.220 /0
DST# 2

General Information:

Operator: Paramount Resources Ltd.
4000, 350 - 7th Avenue S.W.
Calgary Alberta T2P 3W5

Licence#: 1861

Tester: Pugh P

Ticket#: 809303

Reverse Circulated? N

KB Elevation: 542.20 meters

Ground Elevat'n: 537.20 meters

Total Depth: 1,545.00 meters

Mud Data:

Weight: 1060 kg/m3

Type: Invert

Viscosity: 51 s/l

Water Loss: 0.0 cc/s

Filter Cake: 0.0 mm

Hole Data:

Drilled Hole Size: 222 mm

Calipered Hole Size: 222 mm

Hole Condition at Test Time: Good

Conditioned prior to this test? N

Recorder Summary:

<i>Recorder#</i>	<i>Type</i>	<i>Position</i>	<i>Capacity</i>	<i>Units</i>	<i>Depth</i>	<i>Comments</i>
N63	ZI	Inside	41400	kPag	1,310.00	Recovery Recorder Above Interval
N37	ZI	Inside	41400	kPag	1,314.00	
9487	K-3	Outside	20700	kPag	1,325.00	
K3	ZI	Outside	82700	kPag	1,325.00	

Distributions:

Reports Sent To: Wayne Tomm

PARAMOUNT ET AL FORT LIARD I-46
00/ 60.050 / 123.220 /0
DST# 2

Tool Sequence:

<i>Diagram</i>	<i>Description</i>	<i>Length</i>
	Pump Out Sub	0.33 m
	Double Pin Sub	0.31 m
	Pump Out Sub	0.33 m
	Recorder Carrier	1.38 m
	Hydraulic Tool	1.50 m
	Bottom Hole Sampler	1.03 m
	Recorder Carrier	1.38 m
	Hydraulic Jars	2.22 m
	Safety Joint	0.65 m
	Inflate Pump	2.38 m
	Screen	1.16 m
	Packer Assembly	1.78 m
	Packer Stick Down	0.83 m
	Port Sub	0.42 m
	Recorder Carrier	2.02 m
	Spacing	6.60 m
	Cross Over Sub	0.30 m
	Drill Collar	9.13 m
	Cross Over Sub	0.30 m
	Packer Stick Up	0.43 m
	Packer Assembly	1.90 m
	Perforations	0.31 m
	Belly Spring	2.00 m

Tool String Length:	38.69 m
Drill Collar I.D.: 65 mm	93.25 m
Drill Pipe O.D.: 102 mm	1,217.96 m
Collar Pipe Total:	1,311.21 m
Stick Up:	2.66 m
Tool Above:	14.45 m
Interval Tested:	20.00 m
Bottom Hole Choke Size:	25.40 mm


PARAMOUNT ET AL FORT LIARD I-46

00/ 60.050 / 123.220 /0
DST# 2

Recorder# 9487

Depth: 1,325.00 m
Location: Outside

Recorder Type: K-3
Capacity: 20,700 kPag

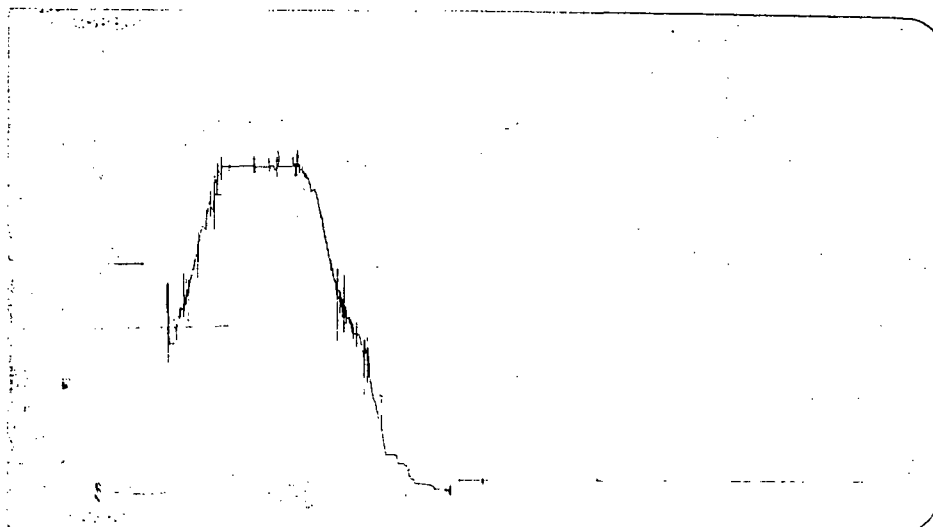


		Pressure (kPag)	Time (min)
1	Initial Hydrostatic	14059	
14	Final Hydrostatic	14045	

Recorder# K3

Depth: 1,325.00 m
Temperature: 45.8 C
Location: Outside

Recorder Type: ZI
Capacity: 82,700 kPag

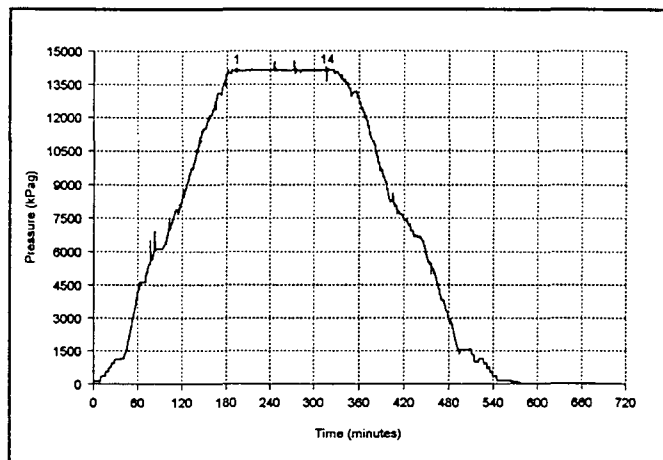

		Pressure (kPag)	Time (min)
1	Initial Hydrostatic	14100	
14	Final Hydrostatic	14089	

PARAMOUNT ET AL FORT LIARD I-46


00/ 60.050 / 123.220 /0

DST# 2

Recorder# N37

Depth: 1,314.00 m
 Temperature: 47.6 C
 Location: Inside

Recorder Type: ZI
 Capacity: 41,400 kPag
 Comments: Above Interval

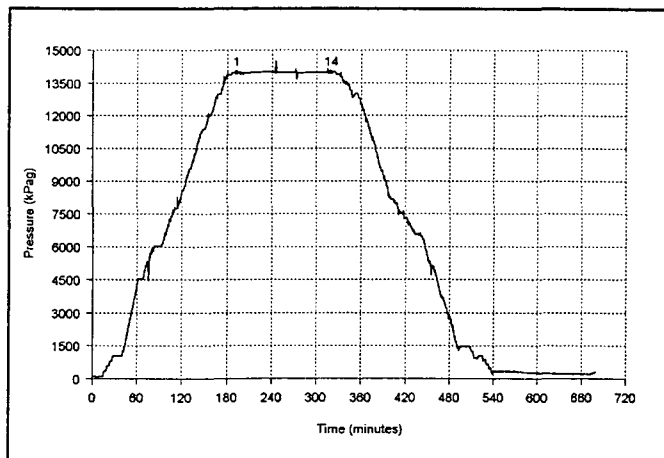

		Pressure (kPag)	Time (min)
1	Initial Hydrostatic	13955	
14	Final Hydrostatic	13968	

Recorder# N63

Depth: 1,310.00 m
 Temperature: 47.0 C
 Location: Inside

Recorder Type: ZI
 Capacity: 41,400 kPag
 Comments: Recovery Recorder

