

NEB COPY

COLLAR LOG

PROVINCE NORTHWEST TERRITORIES FIELD ARROWHEAD WELL PARAMOUNT BERKLEY COMPANY ARROWHEAD N-65 PARAMOUNT RESOURCES LTD.		COMPANY PARAMOUNT RESOURCES LTD.	
WELL PARAMOUNT BERKLEY ARROWHEAD N-65		FIELD ARROWHEAD	
PROVINCE NORTHWEST TERRITORIES		LOCATION 300M656040122454 Perm. Datum Ground Level Elev. 567.90 Log measured from K.B. , 6.70 m above Permanent Datum.	
UMI 300M656040122450 Licence 1221		Other Services: ELEV. K.B. 574.60 G.L. 567.90	
Date FEBRUARY 23, 2009	Service Order 10205913	Shot Density	No. of Shots
Run No. ONE	N/A °C	Depth-Driller 2830.0	Perf. Interval To
BHT		Depth-Logger 80.0	
Depth-Driller 2830.0		Depth-Logger 80.0	
Depth-Logger 80.0		Top Log Interf. 25.0	
Fluid in Hole FRESH WATER		Gun Type	
Fluid Level 0.0		Gun Size	
Bit Size (mm) N/A		Tubing/Casing Record	
Unit # 14172		Size mm Wt. Kg/m	From To
Location EDMONTON		339.7	81.1 SURFACE 480.0
Recorded By BEAU NYCHKA		244.5	64.74 SURFACE 1890.0
Witnessed By AL IRONSDIE		177.8	38.69 SURFACE 2529.0
		139.7	25.3 2300.0 2830.0
Other Services			
Service Type	Size	Depth	
Bridge Plug ALPHA 10K PERMANENT	244.5 mm	50.0 m	
Product. Packer			
Cement Retainer			
Cement			
Tubing Bottom	Junk Basket Type		
Seating Nipple	Gauge Ring Size		

All interpretations of log data are opinions based on inferences from electrical or other measurements. We do not guarantee the accuracy or correctness of any interpretation or recommendation and we shall not be liable or responsible for any loss, cost, damages or expenses incurred or sustained by anyone resulting from any interpretation or recommendation made by any of our employees or agents.

REMARKS Rig: FORMULA POWELL #2521 Service Order # 10205913
LOG CORRELATED TO KB ONLY
IN ORDER TO BYPASS SOFTWARE SAFETY SWITCHES, EXACTLY 100m WAS ADDED TO COMPUTER DEPTH.
BRIDGE PLUG SET AT 50.0m AS REQUIRED BY BOARD.

EQUIPMENT DATA			
Run No.	Tool Type	Tool No.	Other
ONE	CCLT	CYTHERIA	SET BRIDGE PLUG

Date 23-FEB-2009


Type PERMANENT

Model ALPHA 10k


Size 244.5 mm

Depth 50.0 m

Make WEATHERFORD

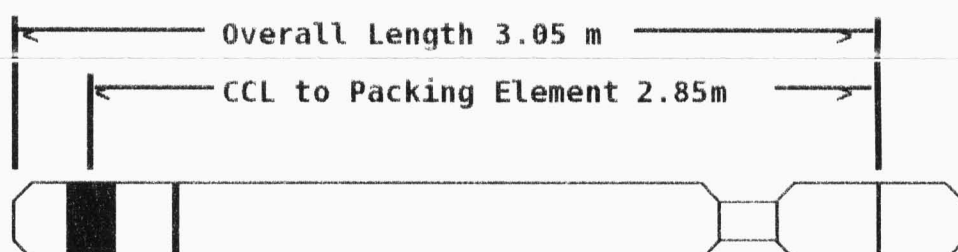

Shot V-I Characteristics
Top shot at 150.00m 02/23/09 12:09:28

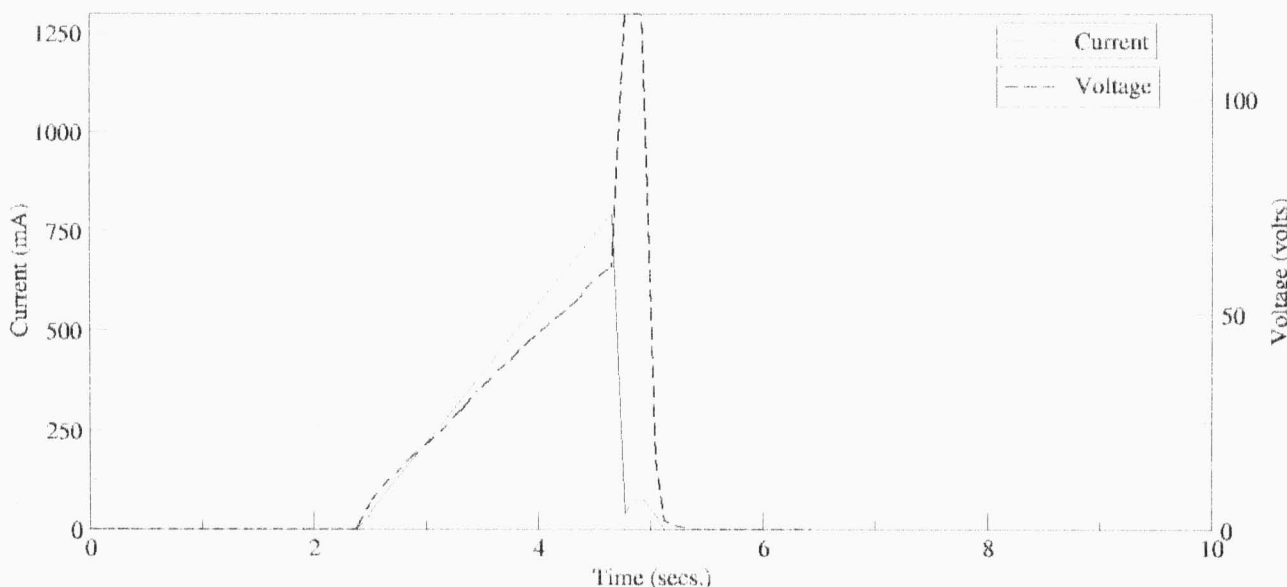

Hold the SHOOT and ARM switches

Shooting

Power supply is ramping down

Follow SAFETY MANUAL Procedures for Shooting

Mon Feb 23 12:09:29 2009

Job # 10205913

REMARKS

BRIDGE PLUG SET AT 50m, AS REQUESTED
IN ORDER TO BYPASS SOFTWARE SAFETY SWITCHES, ADDED EXACTLY 100.0m
PRIOR TO POSITIONING PASS AS SHOWN BELOW.
COLLARS VERIFIED TO MATCH UNMODIFIED CORRELATION PASS.


DEPTH SCALE: 1:240



VERSION: 80214133R

MAIN PASS

10205913 BPMAIN

FINISH DEPTH: 122.4 Meters DIRECTION: UP DATE: 02/23/2009 TIME: 12:21 MODE: TRACE PLAYBACK

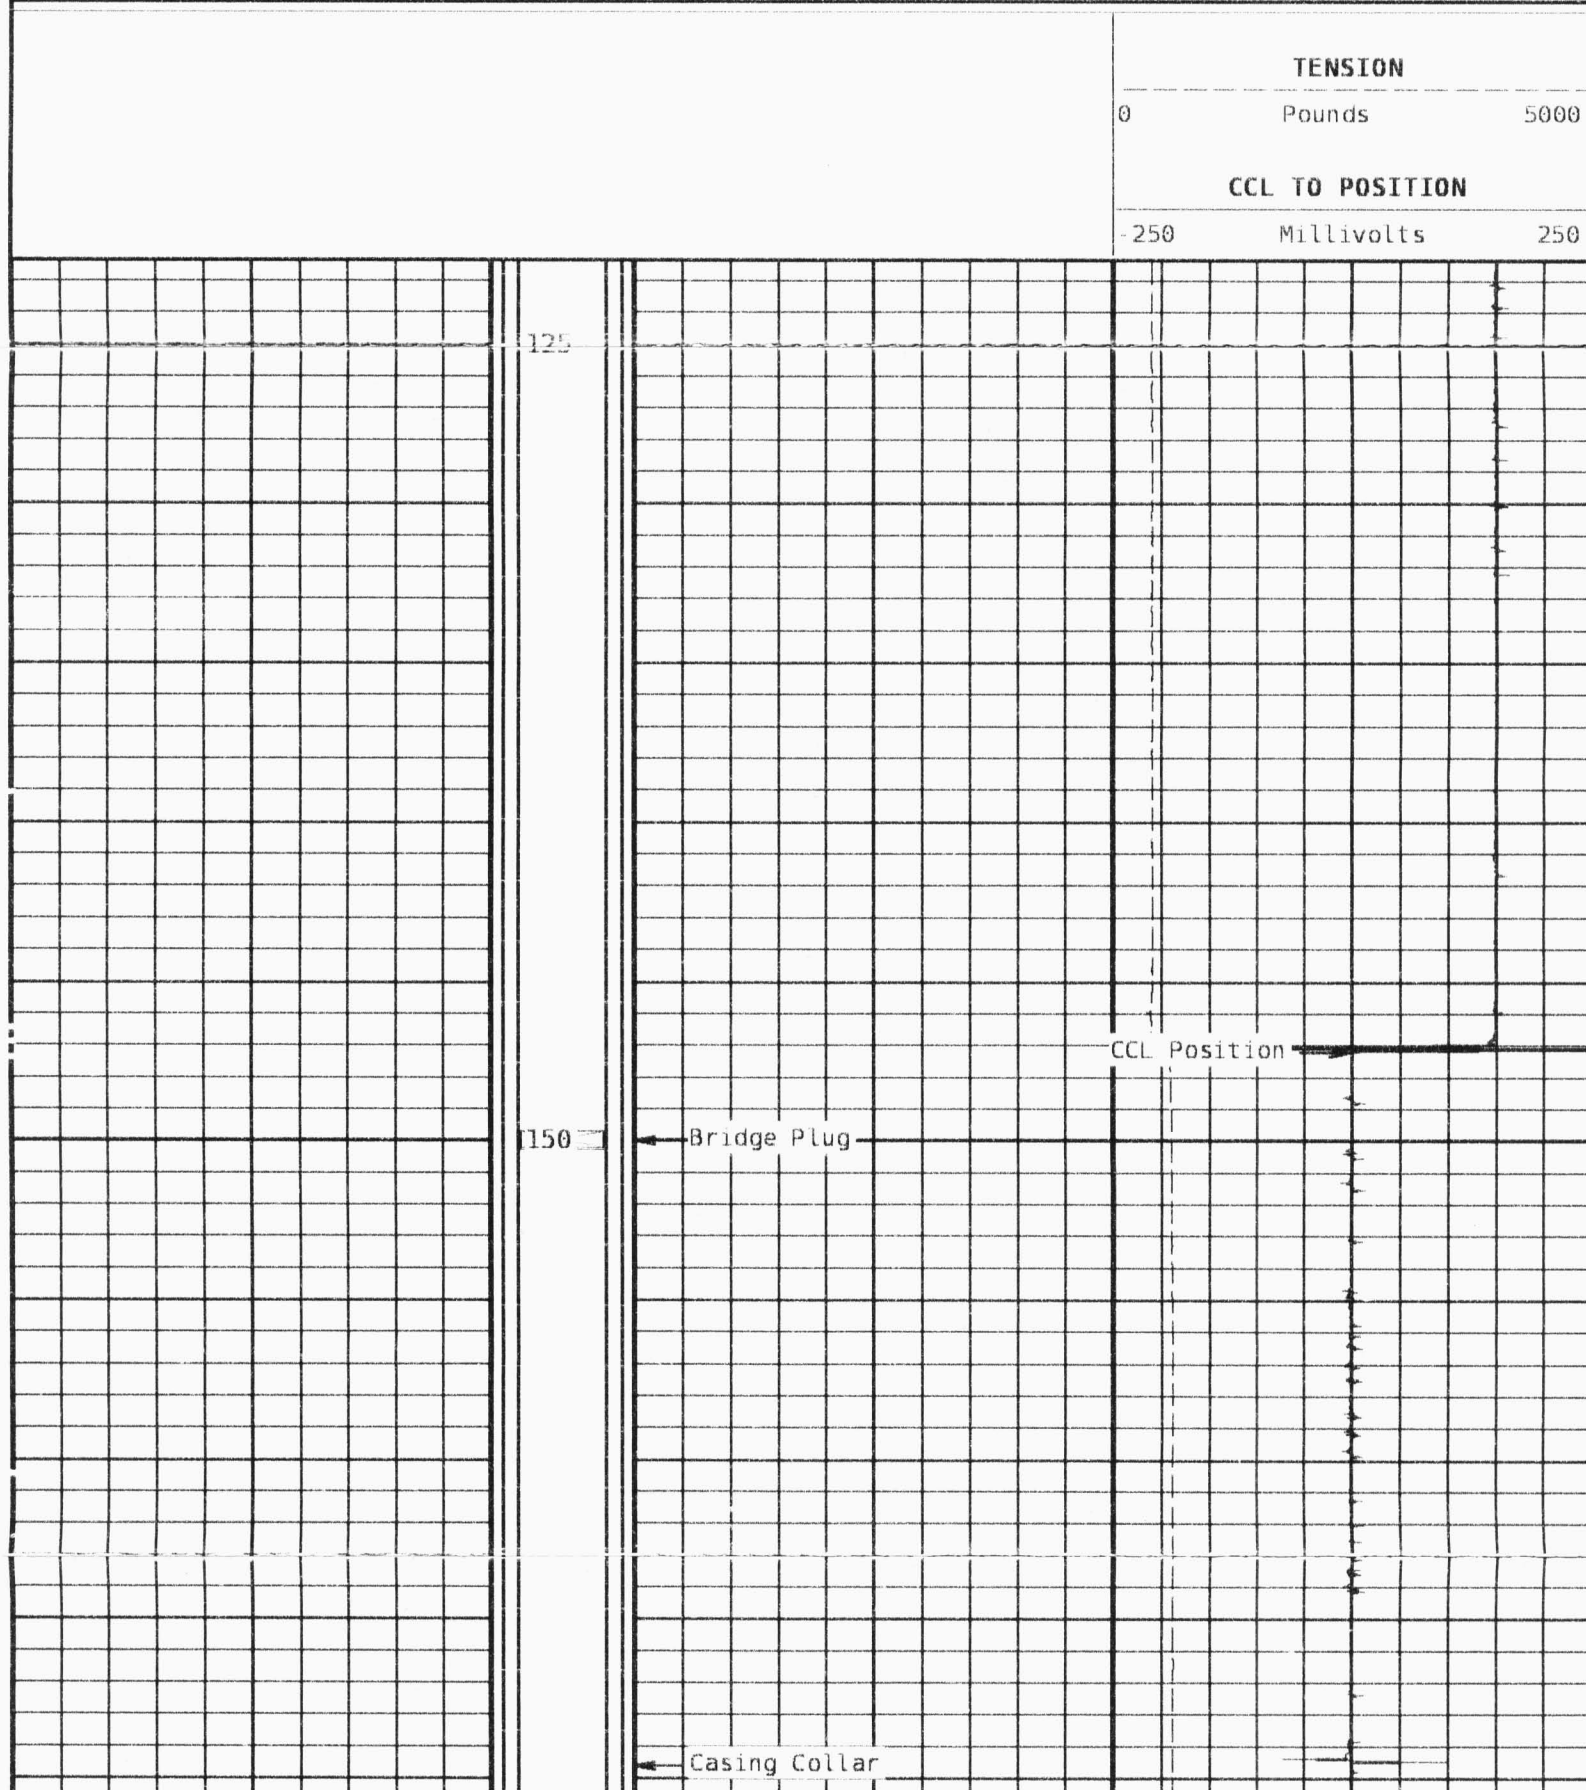

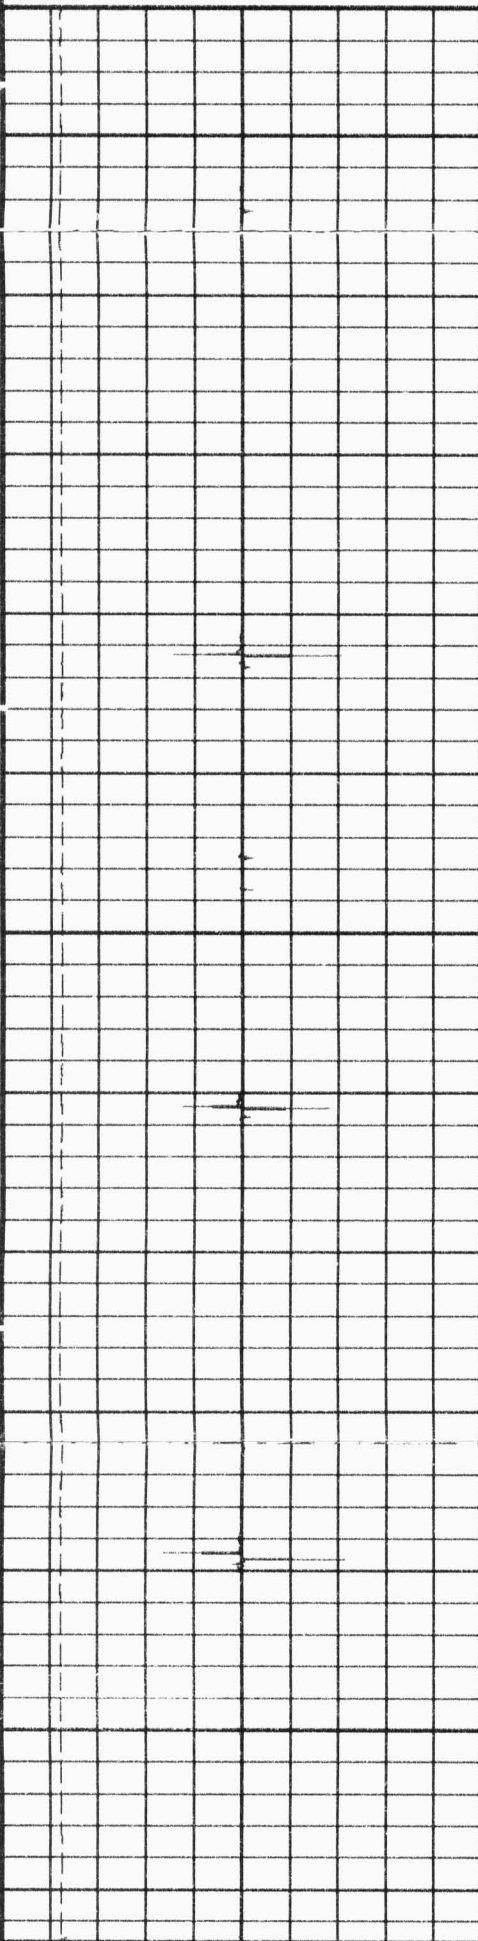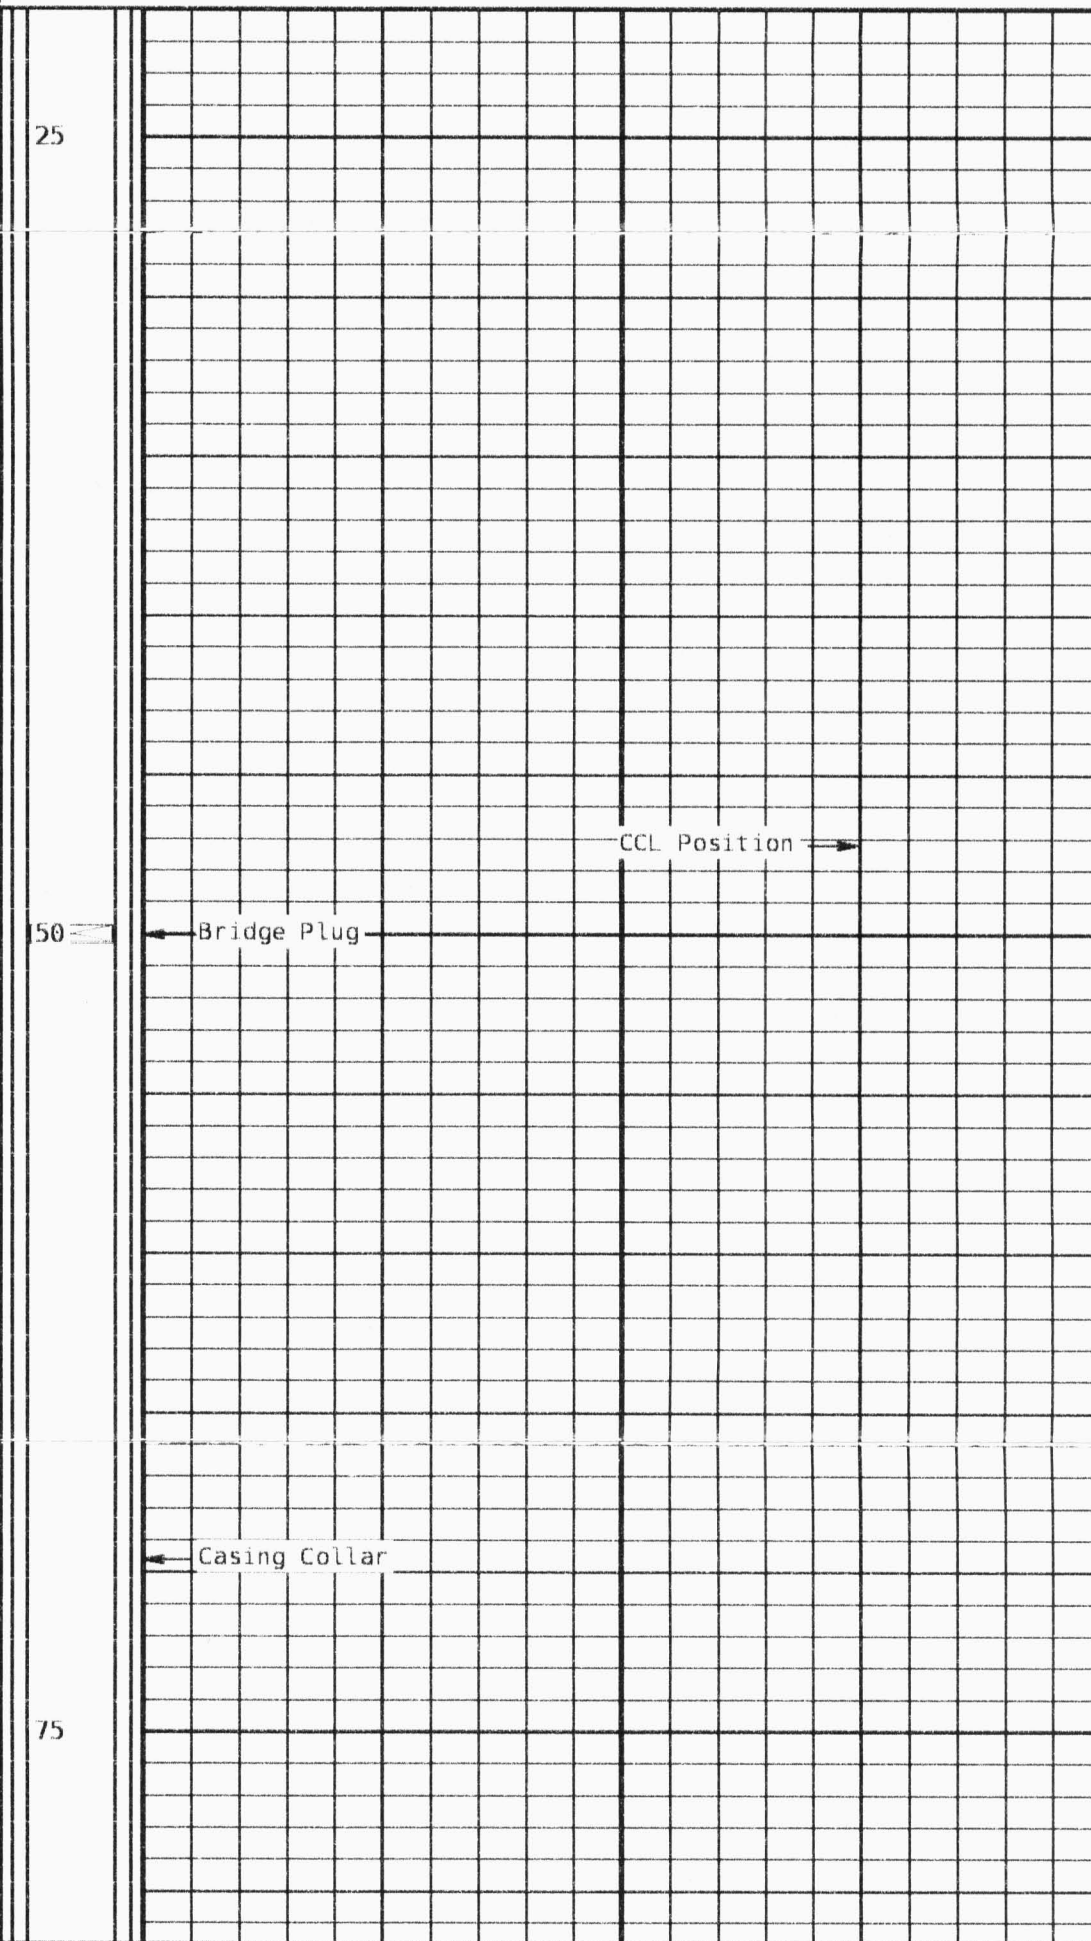REMARKS					
CORRELATION PASS PULLED TO VERIFY PLUG NOT POSITIONED ON COLLAR PASS CORRELATED TO KB ONLY.					
DEPTH SCALE: 1:240			VERSION: 80214133R		
REPEAT PASS					
10205913 BPREP					
FINISH DEPTH: 21.0 Meters DIRECTION: UP DATE: 02/23/2009 TIME: 12:06 MODE: TRACE PLAYBACK					
TENSION					
0	Pounds	5000			
CCL TO CORRELATE					
-250	Millivolts	250			
					
CCL TO CORRELATE					
-250	Millivolts	250			
TENSION					
0	Pounds	5000			
START DEPTH: 81.7 DIRECTION: UP DATE: 02/23/2009 TIME: 12:06 MODE: TRACE PLAYBACK					
10205913 BPREP					
REPEAT PASS					
DEPTH SCALE: 1:240			VERSION: 80214133R		

COMPANY PARAMOUNT RESOURCES LTD.		
WELL	PARAMOUNT BERKLEY ARROWHEAD N-65	
FIELD	ARROWHEAD PROVINCE NORTHWEST TERRITORIES	