Downhole Well Profile

Paramount resources ltd.

Well Name: PARAMOUNT ET AL LIARD 2M-25

API/UWI	Surface Legal Location	License #	Field Name	State/Province
302M256030123300		0002008	LIARD	NT
Well Configuration Type	**Original KB Elevation (m)**	**KB-Ground Distance (m)**	**KB-Casing Flange Distance (m)**	**KB-Tubing Head Distance (m)**
	919.00	7.40	7.40	

Type

Des	Make	Model	WP (bars)	Service	WP Top (bars)	Top Ring Gasket	Bore Min (mm)

Original Hole, 10/22/2012 11:22:57 AM

D (mK)	VD (mK)	Incl (°)	DLS	Vertical schematic (actual)	Problem	Lesson
			DL –		Est C...	Est Co...

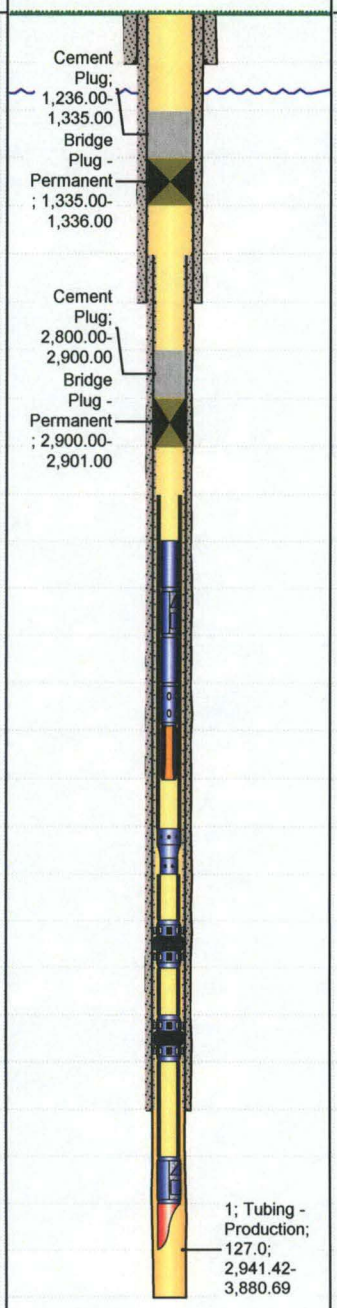

Casing Strings

Csg Des	OD (mm)	Wt/Len (kg/m)	Grade	Top Thread	Set Depth (mKB)
Surface	339.7	101.195	K-55		383.00
Intermediate	244.5	59.527	N-80		1,509.70
Production Liner	177.8	43.157	MN-80 Hydril SLX		3,875.00

Perforations

Date	Top (mKB)	Btm (mKB)	Zone

Tubing - Production set at 3,880.69mKB on 4/12/2011 00:00

Tubing Description	Run Date	String Length (m)	Set Depth (mKB)
Tubing - Production	4/12/2011	939.27	3,880.69

Item Des	Jts	Make	Model	OD (mm)	Wt (kg/m)	Grade	Len (m)
127mm production tubing				127.0	26.790	Hydril 513	876.00
114.3mm X 127mm Cross Over				114.3			0.42
114.3mm Casing pup joint				114.3	18.750	L-80	2.85
Weatherford Ultra Pack c/w 120.65 seal bore		Baker		114.3			1.50
1 Joints of 114.3mm Casing				114.3	18.750	L-80	14.00
Weatherford Ultra Pack c/w 120.65 seal bore		Baker		114.3			1.50
3 Joints of 114.3mm Casing				114.3	18.750	L-80	42.00
Profile Nipple				114.3			0.50
Mule Shoe				114.3			0.50

<des> on <dttmrun>

Rod Description	Run Date	String Length (m)	Set Depth (mKB)

Item Des	Jts	Make	Model	OD (mm)	Wt (kg/m)	Grade	Len (m)